
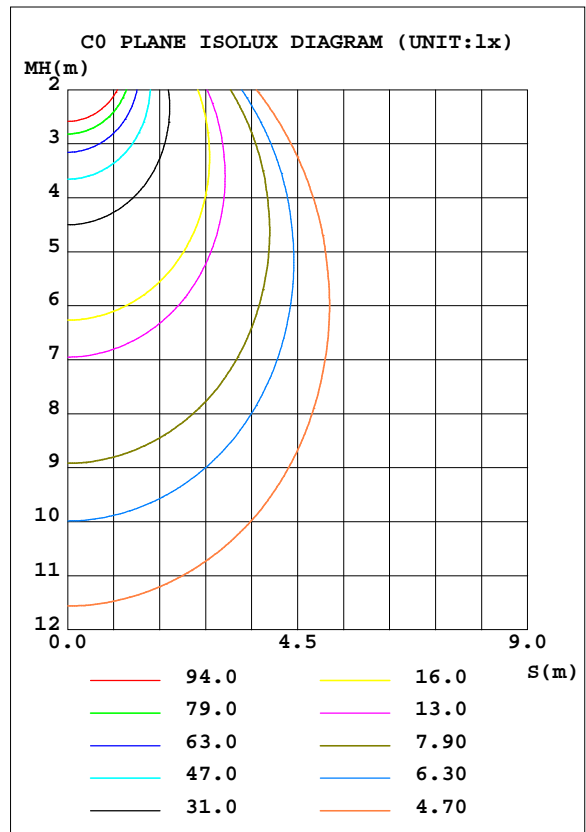


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.60 lm/W			
MODEL		I _{max} (cd)	628.1	S/MH(C0/180)	1.16
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1448.6	η UP, DN(C0-180)	1.2,49.2
NOMINAL FLUX(lm)	1448.58	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4,48.2
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.30

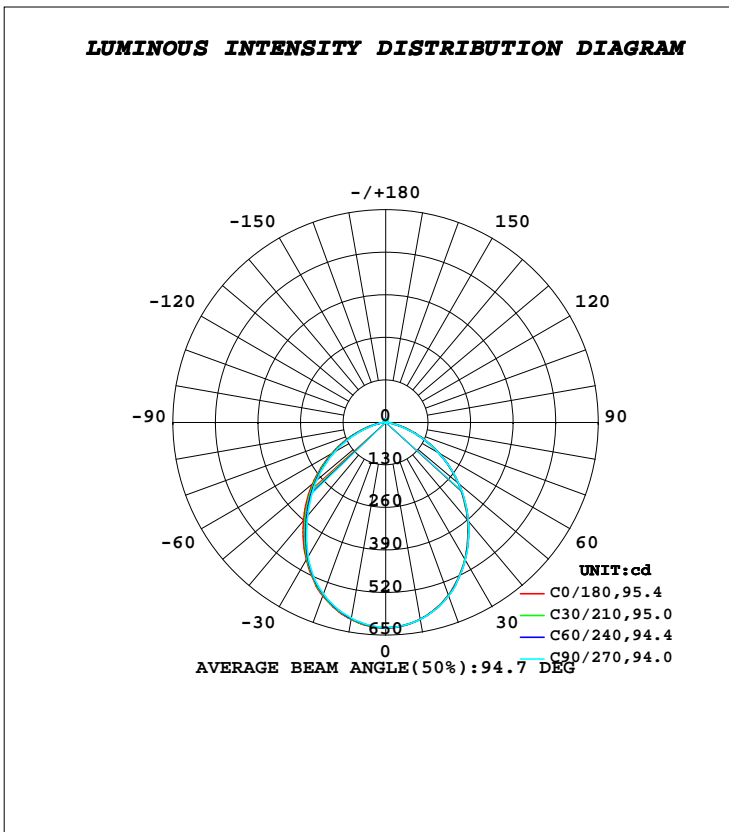

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	610.1	610.5	610.9	611.3	611.3	609.0	607.1	607.8	0- 10	59.03	59.03	4.07,4.07
20	560.9	562.5	563.5	563.9	563.4	560.2	557.5	558.1	10- 20	165.9	224.9	15.5,15.5
30	483.6	485.1	485.9	486.2	485.1	479.1	474.3	476.7	20- 30	241.4	466.3	32.2,32.2
40	389.8	392.1	393.1	393.3	390.9	379.6	370.6	375.8	30- 40	271.5	737.8	50.9,50.9
50	290.0	291.5	292.4	293.3	292.2	283.2	275.8	279.5	40- 50	259.5	997.3	68.8,68.8
60	189.2	187.3	187.0	189.9	191.7	185.0	178.9	181.5	50- 60	211.3	1209	83.4,83.4
70	95.90	89.76	87.82	93.51	98.65	92.12	85.54	88.11	60- 70	136.2	1345	92.8,92.8
80	22.16	20.08	19.80	22.74	25.50	23.81	21.55	21.35	70- 80	56.00	1401	96.7,96.7
90	2.368	2.255	2.406	3.016	3.630	3.815	3.714	3.200	80- 90	10.27	1411	97.4,97.4
100	3.008	2.894	2.987	3.420	3.891	4.169	4.212	3.779	90-100	3.505	1415	97.7,97.7
110	4.114	3.936	3.999	4.463	4.967	5.202	5.207	4.809	100-110	4.289	1419	98,98
120	5.367	5.115	5.146	5.652	6.198	6.378	6.334	5.973	110-120	5.131	1424	98.3,98.3
130	6.560	6.333	6.375	6.876	7.400	7.512	7.416	7.085	120-130	5.703	1430	98.7,98.7
140	7.538	7.377	7.441	7.894	8.356	8.443	8.339	8.026	130-140	5.761	1436	99.1,99.1
150	8.336	8.320	8.415	8.710	8.996	9.062	8.990	8.735	140-150	5.230	1441	99.5,99.5
160	9.037	9.109	9.204	9.344	9.471	9.540	9.526	9.342	150-160	4.172	1445	99.7,99.7
170	9.682	9.714	9.760	9.839	9.906	9.907	9.870	9.793	160-170	2.706	1448	99.9,99.9
180	10.12	10.08	10.07	10.11	10.15	10.10	10.04	10.06	170-180	0.9487	1449	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

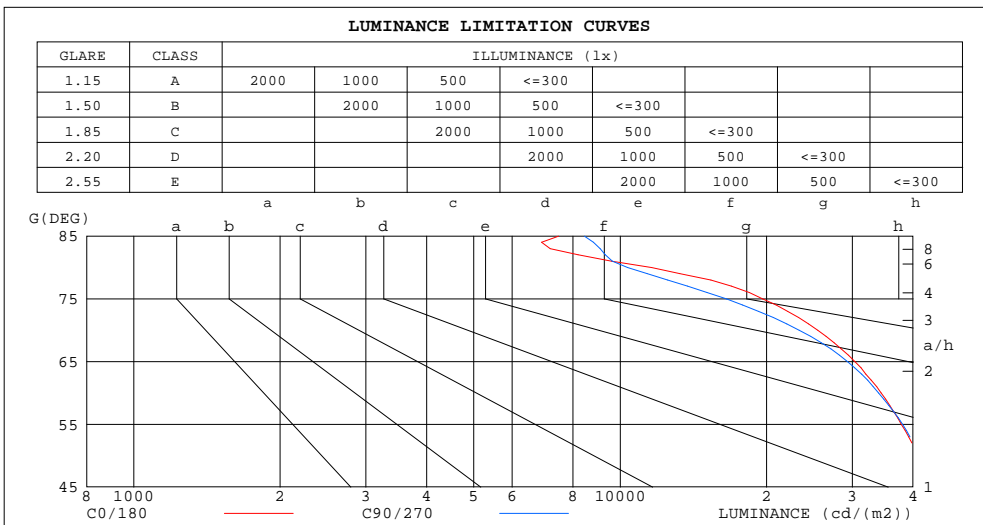

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7471	8444
80	11601	10364
75	19635	16558
70	25489	23343
65	30362	29326
60	34408	33991
55	37871	38052
50	41016	41354
45	43584	44194


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.05	1.02	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.88	.86	.84
2.0	.93	.87	.82	.91	.85	.81	.87	.82	.78	.83	.80	.76	.80	.77	.74	.72
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.65	.72	.68	.64	.62
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.67	.61	.57	.65	.60	.56	.54
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.58	.53	.49	.47
6.0	.60	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.53	.48	.44	.42
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.45	.39	.35	.33
9.0	.46	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.30
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.39	.33	.29	.27

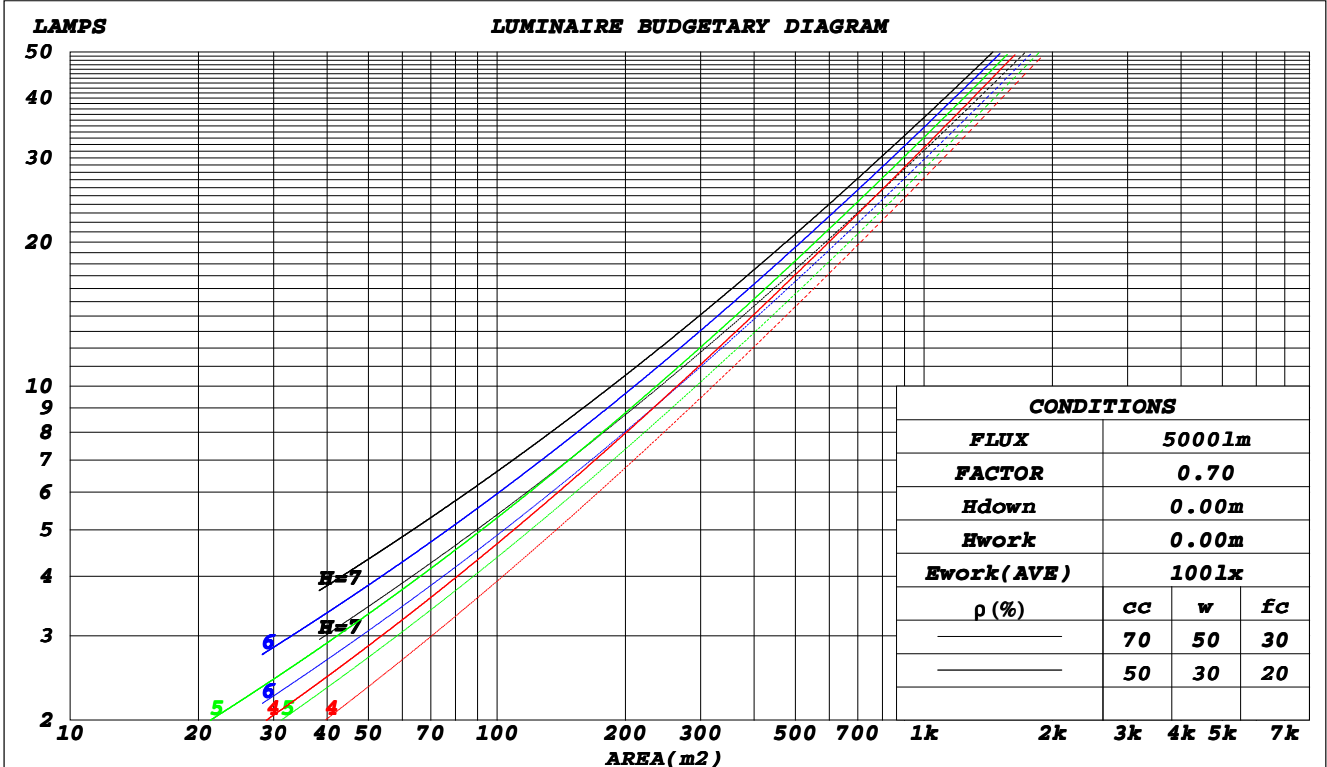

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.271	.154	.049	.263	.150	.048	.249	.143	.046	.235	.136	.044	.223	.129	.042	
2.0	.261	.143	.044	.254	.140	.043	.241	.134	.042	.230	.129	.040	.219	.124	.039	
3.0	.245	.131	.039	.239	.128	.039	.228	.124	.038	.218	.119	.037	.208	.115	.036	
4.0	.229	.119	.035	.224	.117	.035	.214	.113	.034	.205	.110	.033	.196	.106	.032	
5.0	.214	.109	.032	.209	.107	.031	.200	.104	.031	.192	.101	.030	.184	.098	.030	
6.0	.200	.100	.029	.196	.099	.028	.188	.096	.028	.180	.094	.028	.173	.091	.027	
7.0	.187	.093	.026	.184	.091	.026	.176	.089	.026	.170	.087	.025	.163	.085	.025	
8.0	.176	.086	.024	.173	.085	.024	.166	.083	.024	.160	.081	.023	.154	.079	.023	
9.0	.166	.080	.022	.163	.079	.022	.157	.077	.022	.151	.076	.022	.146	.074	.021	
10.0	.156	.075	.021	.153	.074	.021	.148	.073	.020	.143	.071	.020	.138	.070	.020	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.070	.070	.070	.023	.023	.023	
1.0	.197	.176	.157	.169	.151	.135	.116	.104	.094	.067	.060	.054	.021	.019	.018	
2.0	.188	.152	.122	.161	.131	.105	.110	.091	.073	.064	.053	.043	.020	.017	.014	
3.0	.180	.134	.098	.154	.116	.085	.106	.080	.060	.061	.047	.035	.020	.015	.011	
4.0	.172	.121	.081	.148	.104	.071	.102	.073	.050	.059	.043	.029	.019	.014	.010	
5.0	.165	.110	.070	.142	.095	.061	.098	.067	.043	.057	.039	.025	.018	.013	.008	
6.0	.158	.102	.061	.136	.088	.053	.094	.062	.038	.054	.036	.022	.018	.012	.007	
7.0	.151	.095	.055	.130	.082	.048	.090	.058	.034	.052	.034	.020	.017	.011	.007	
8.0	.145	.089	.050	.125	.077	.044	.087	.054	.031	.050	.032	.019	.016	.010	.006	
9.0	.140	.084	.047	.120	.073	.041	.083	.051	.029	.049	.030	.017	.016	.010	.006	
10.0	.134	.080	.044	.116	.069	.038	.080	.049	.027	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.5	25.4	26.7	27.0	25.1	26.5	25.4	26.7	27.0
3H	26.1	27.4	26.4	27.6	27.9	26.0	27.3	26.3	27.5	27.8
4H	26.3	27.5	26.7	27.8	28.1	26.2	27.4	26.5	27.7	28.0
6H	26.4	27.5	26.8	27.9	28.2	26.2	27.3	26.6	27.6	28.0
8H	26.4	27.5	26.8	27.8	28.1	26.2	27.3	26.6	27.6	27.9
12H	26.4	27.4	26.7	27.7	28.1	26.2	27.2	26.5	27.5	27.9
4H 2H	25.5	26.7	25.9	27.0	27.3	25.5	26.7	25.9	27.0	27.3
3H	26.6	27.7	27.0	28.0	28.3	26.5	27.6	26.9	27.9	28.2
4H	26.9	27.9	27.4	28.3	28.6	26.8	27.7	27.2	28.1	28.5
6H	27.1	27.9	27.5	28.3	28.7	26.8	27.7	27.3	28.1	28.5
8H	27.1	27.8	27.5	28.2	28.7	26.9	27.6	27.3	28.0	28.5
12H	27.0	27.7	27.5	28.2	28.6	26.8	27.5	27.3	28.0	28.4
8H 4H	27.0	27.8	27.4	28.2	28.6	26.8	27.6	27.3	28.0	28.4
6H	27.2	27.8	27.6	28.2	28.7	26.9	27.6	27.4	28.0	28.5
8H	27.2	27.7	27.7	28.2	28.7	27.0	27.5	27.5	28.0	28.5
12H	27.2	27.6	27.7	28.1	28.7	27.0	27.5	27.5	28.0	28.5
12H 4H	26.9	27.7	27.4	28.1	28.5	26.8	27.5	27.2	27.9	28.4
6H	27.1	27.7	27.6	28.2	28.7	26.9	27.5	27.4	28.0	28.5
8H	27.2	27.6	27.7	28.1	28.7	27.0	27.4	27.5	27.9	28.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.5				

CIE Pub.117, 1449 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.3)
 Area: 0.011 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	61	50	44	60	50	43	59	49	43	37
0.80	71	60	53	70	60	53	68	59	53	46
1.00	79	69	62	78	68	62	76	69	61	55
1.25	86	77	70	85	76	70	82	74	69	62
1.50	91	82	76	89	81	75	86	79	74	67
2.00	97	90	84	95	88	83	92	86	81	73
2.50	101	94	88	99	92	87	95	89	85	77
3.00	104	98	93	101	96	92	97	93	89	80
4.00	107	102	98	105	100	97	100	97	94	84
5.00	109	105	102	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

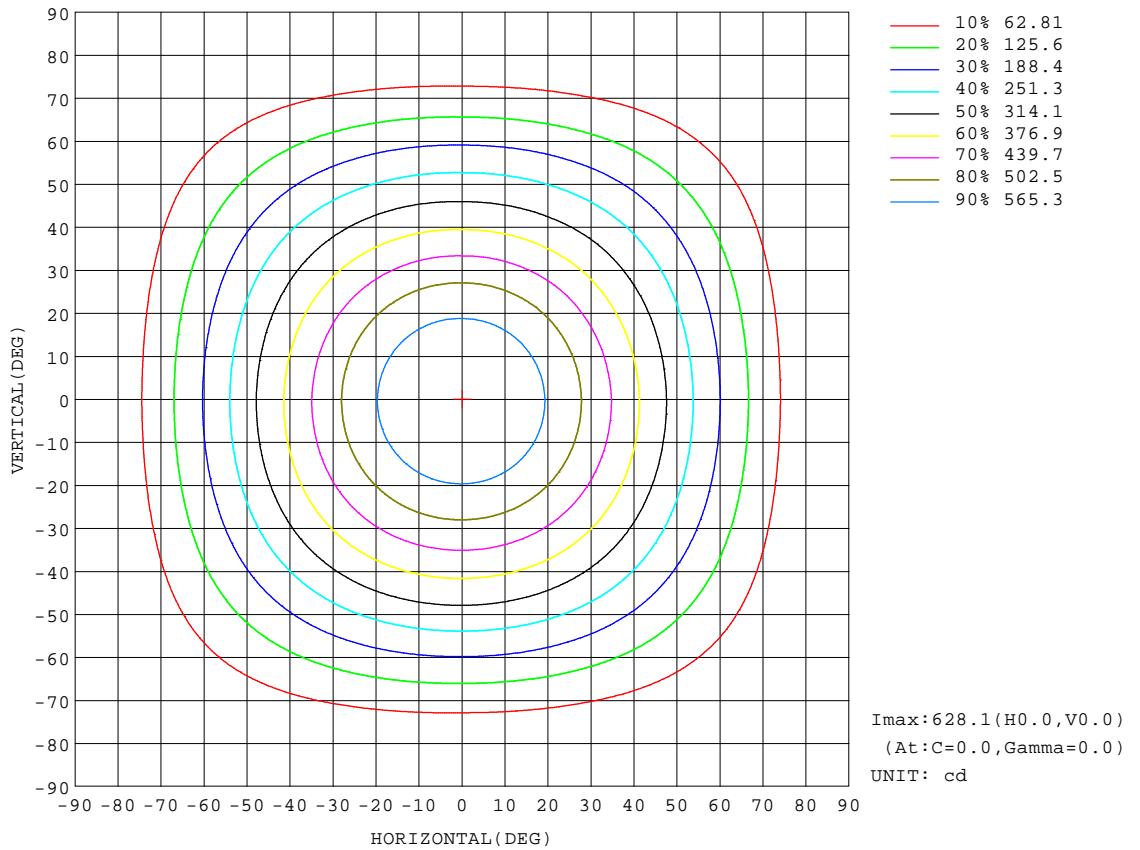


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

Flux out:922.9 lm

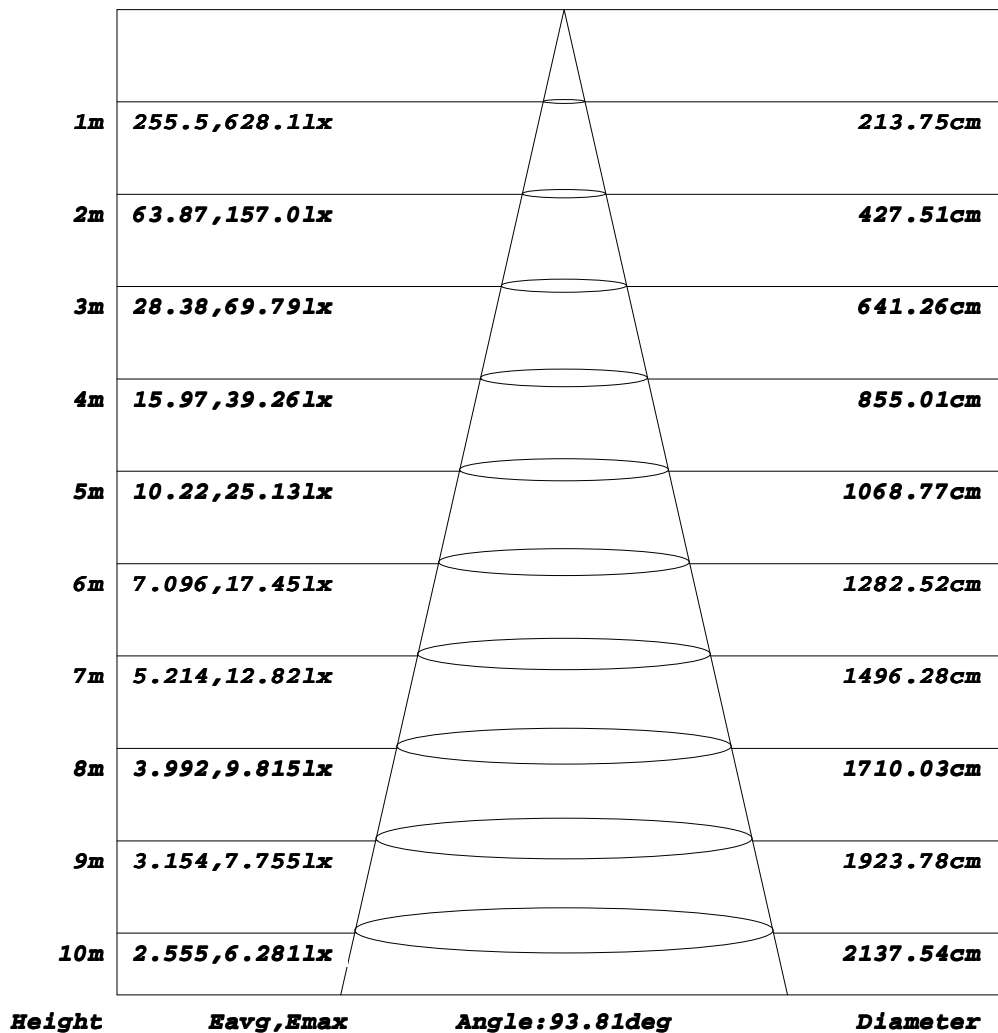


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz		
Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

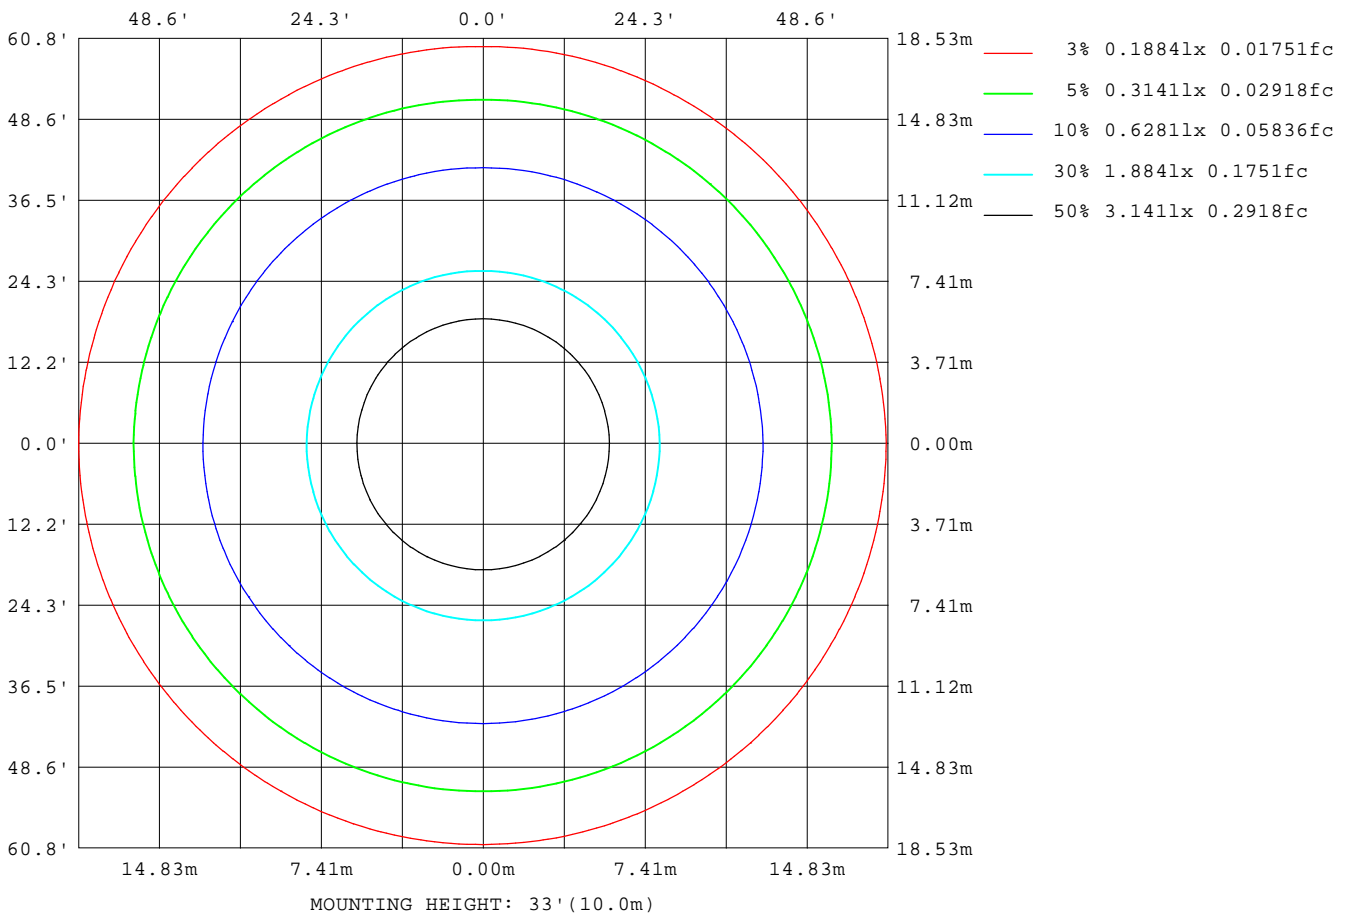

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

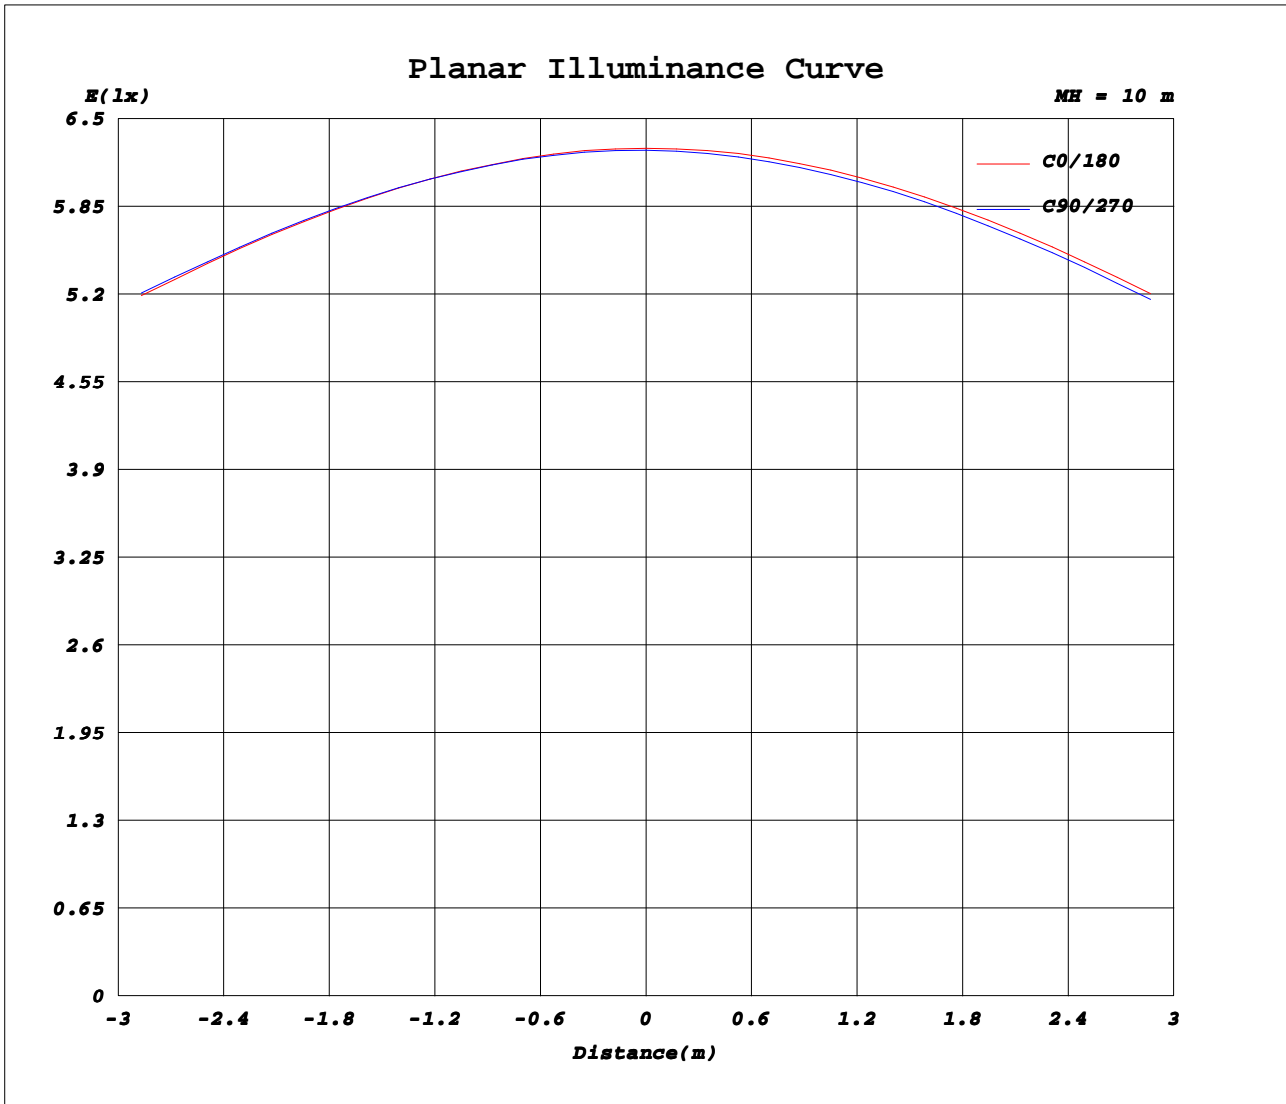

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0750A P:14.400W PF:0.8870 Freq:50.00Hz Lamp Flux:1448.58x1 lm		
Name: NS11-φ162MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	628	627	627	627	627	628	628	628	627	627	627	627							
5	623	623	623	623	623	624	624	623	622	621	621	622							
10	610	610	611	611	611	611	611	610	608	607	607	608							
15	589	590	591	591	591	591	591	589	587	586	586	587							
20	561	562	563	563	564	564	563	561	559	557	558	559							
25	525	526	526	527	527	527	527	525	523	521	521	523							
30	484	485	486	486	486	486	485	481	477	474	475	478							
35	438	439	440	441	441	441	439	433	426	422	424	429							
40	390	392	393	393	394	393	391	383	376	371	373	379							
45	339	341	343	344	345	344	342	335	328	322	324	329							
50	290	291	292	292	293	293	292	286	280	276	277	282							
55	239	239	240	240	241	242	241	236	231	228	229	232							
60	189	188	187	187	189	191	192	187	183	179	180	183							
65	141	138	137	136	139	142	144	140	135	131	132	135							
70	95.9	91.1	88.4	87.8	91.4	95.6	98.6	94.6	89.6	85.5	86.4	89.8							
75	55.9	50.7	47.8	47.1	51.0	55.5	59.0	55.4	50.9	47.0	47.6	50.6							
80	22.2	20.5	19.7	19.8	21.7	23.8	25.5	24.6	23.1	21.5	21.2	21.4							
85	7.16	7.54	7.85	8.10	8.25	8.37	8.47	8.71	8.88	8.88	8.55	7.97							
90	2.37	2.25	2.26	2.41	2.80	3.23	3.63	3.80	3.83	3.71	3.42	2.98							
95	2.54	2.57	2.64	2.77	2.99	3.24	3.48	3.71	3.86	3.87	3.62	3.18							
100	3.01	2.90	2.89	2.99	3.26	3.58	3.89	4.11	4.23	4.21	3.98	3.58							
105	3.54	3.41	3.40	3.49	3.76	4.09	4.40	4.61	4.71	4.68	4.46	4.08							
110	4.11	3.96	3.92	4.00	4.29	4.64	4.97	5.16	5.25	5.21	4.99	4.63							
115	4.75	4.54	4.46	4.53	4.85	5.23	5.59	5.76	5.82	5.76	5.55	5.22							
120	5.37	5.15	5.08	5.15	5.46	5.84	6.20	6.35	6.40	6.33	6.13	5.81							
125	5.96	5.76	5.70	5.78	6.10	6.47	6.82	6.95	6.97	6.88	6.68	6.38							
130	6.56	6.36	6.30	6.37	6.69	7.06	7.40	7.51	7.51	7.42	7.23	6.94							
135	7.07	6.91	6.88	6.96	7.26	7.61	7.92	8.00	7.99	7.88	7.69	7.42							
140	7.54	7.39	7.36	7.44	7.73	8.06	8.36	8.45	8.44	8.34	8.16	7.89							
145	7.96	7.88	7.89	7.98	8.21	8.47	8.70	8.79	8.80	8.73	8.56	8.30							
150	8.34	8.31	8.33	8.42	8.61	8.81	9.00	9.06	9.06	8.99	8.84	8.63							
155	8.70	8.70	8.75	8.82	8.97	9.13	9.26	9.34	9.35	9.31	9.18	8.97							
160	9.04	9.08	9.14	9.20	9.30	9.39	9.47	9.53	9.55	9.53	9.42	9.26							
165	9.38	9.42	9.47	9.52	9.58	9.64	9.68	9.71	9.71	9.69	9.62	9.52							
170	9.68	9.70	9.73	9.76	9.81	9.87	9.91	9.91	9.90	9.87	9.82	9.76							
175	9.98	9.95	9.94	9.95	10.0	10.1	10.1	10.1	10.0	9.99	9.97	9.97							
180	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.0	10.0	10.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: