
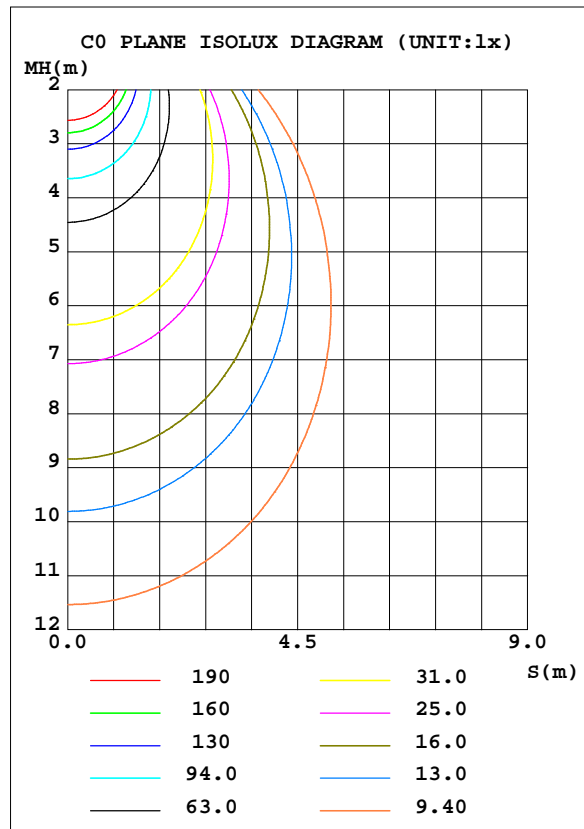


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.35 lm/W			
MODEL		I _{max} (cd)	1250	S/MH(C0/180)	1.17
NOMINAL POWER(W)	29	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2935.2	η UP, DN(C0-180)	1.2, 49.0
NOMINAL FLUX(lm)	2935.21	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 48.5
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.30

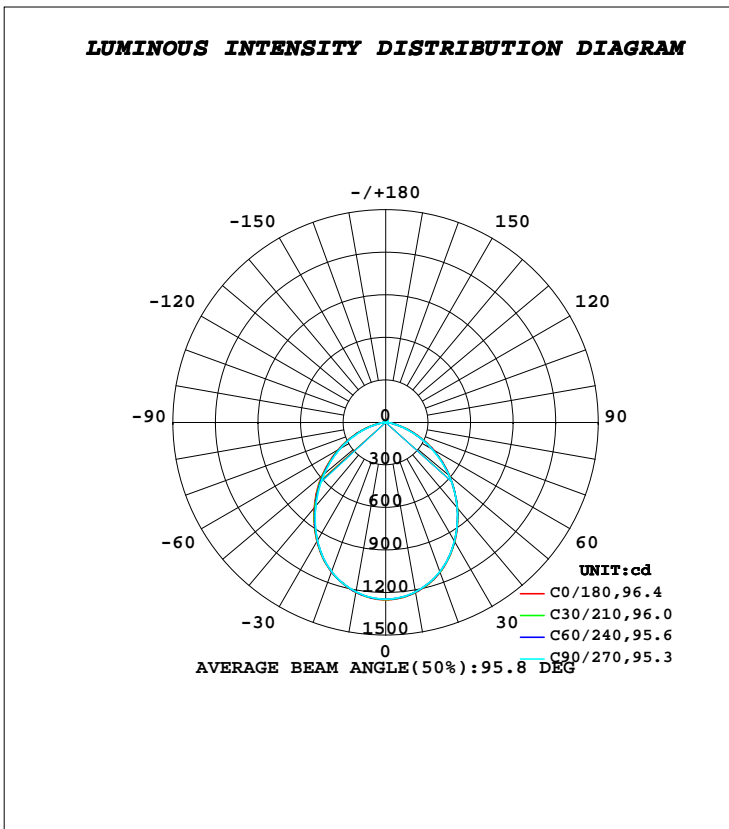

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1218	1215	1213	1215	1217	1214	1213	1214	0- 10	117.5	117.5	4,4
20	1124	1120	1119	1120	1121	1120	1118	1120	10- 20	330.8	448.4	15.3,15.3
30	973.6	970.6	968.9	969.7	970.1	965.7	962.5	965.9	20- 30	483.2	931.6	31.7,31.7
40	788.1	786.1	784.7	785.0	783.9	774.5	767.5	773.7	30- 40	547.9	1479	50.4,50.4
50	590.2	586.0	584.2	587.4	588.9	576.9	566.9	573.5	40- 50	525.5	2005	68.3,68.3
60	391.1	383.2	379.7	384.6	388.7	378.7	370.1	376.2	50- 60	429.5	2434	82.9,82.9
70	202.2	191.1	186.9	194.7	202.1	192.7	183.7	188.8	60- 70	282.2	2717	92.6,92.6
80	49.81	47.89	47.97	52.13	55.15	49.16	43.12	44.38	70- 80	119.7	2836	96.6,96.6
90	5.041	4.909	5.264	6.503	7.681	7.776	7.347	6.413	80- 90	23.69	2860	97.4,97.4
100	6.158	5.903	6.105	7.074	8.106	8.609	8.616	7.717	90-100	7.191	2867	97.7,97.7
110	8.316	7.995	8.159	9.142	10.18	10.59	10.54	9.711	100-110	8.757	2876	98,98
120	10.69	10.25	10.36	11.38	12.46	12.82	12.71	11.96	110-120	10.36	2886	98.3,98.3
130	12.98	12.64	12.78	13.73	14.71	14.95	14.77	14.08	120-130	11.39	2898	98.7,98.7
140	14.87	14.68	14.87	15.73	16.59	16.77	16.56	15.90	130-140	11.46	2909	99.1,99.1
150	16.53	16.47	16.67	17.34	17.97	18.03	17.81	17.29	140-150	10.38	2920	99.5,99.5
160	18.12	18.20	18.38	18.74	19.07	19.14	19.03	18.67	150-160	8.318	2928	99.8,99.8
170	19.41	19.53	19.64	19.77	19.86	19.84	19.76	19.61	160-170	5.433	2933	99.9,99.9
180	20.33	20.20	20.16	20.28	20.39	20.26	20.13	20.18	170-180	1.903	2935	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

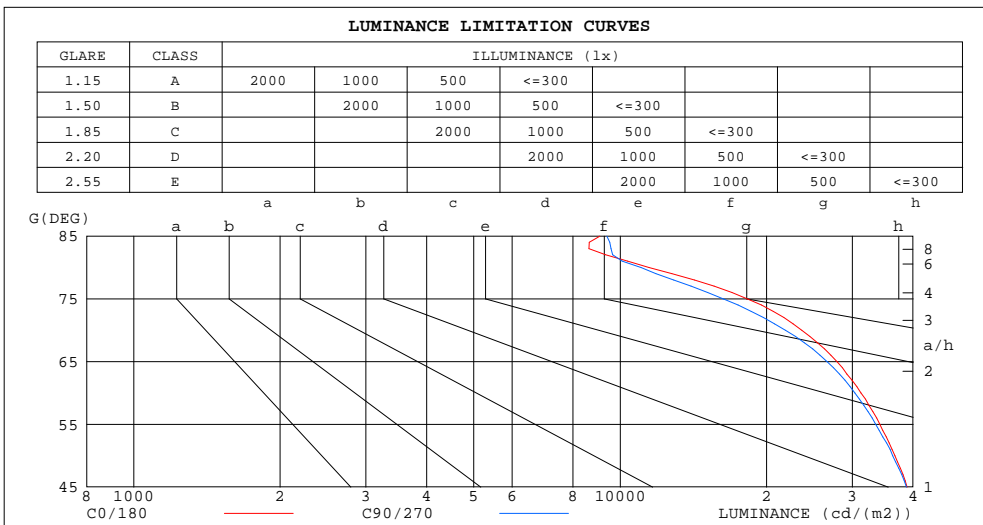

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9087	9391
80	11473	11051
75	18248	16312
70	23642	21855
65	27907	26638
60	31290	30380
55	34187	33533
50	36729	36352
45	38918	38790


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.05	1.01	.98	1.03	.99	.96	.98	.95	.93	.94	.91	.89	.90	.88	.86	.84
2.0	.93	.87	.81	.91	.85	.80	.87	.82	.78	.83	.79	.76	.80	.77	.74	.72
3.0	.82	.75	.69	.81	.74	.68	.77	.71	.66	.74	.69	.65	.71	.67	.64	.61
4.0	.73	.65	.59	.72	.64	.58	.69	.63	.57	.67	.61	.56	.64	.59	.55	.53
5.0	.66	.58	.51	.65	.57	.51	.62	.55	.50	.60	.54	.49	.58	.53	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.53	.47	.43	.41
7.0	.54	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.42	.36	.49	.41	.36	.48	.41	.36	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.41	.36	.32	.30
10.0	.42	.35	.30	.42	.35	.30	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

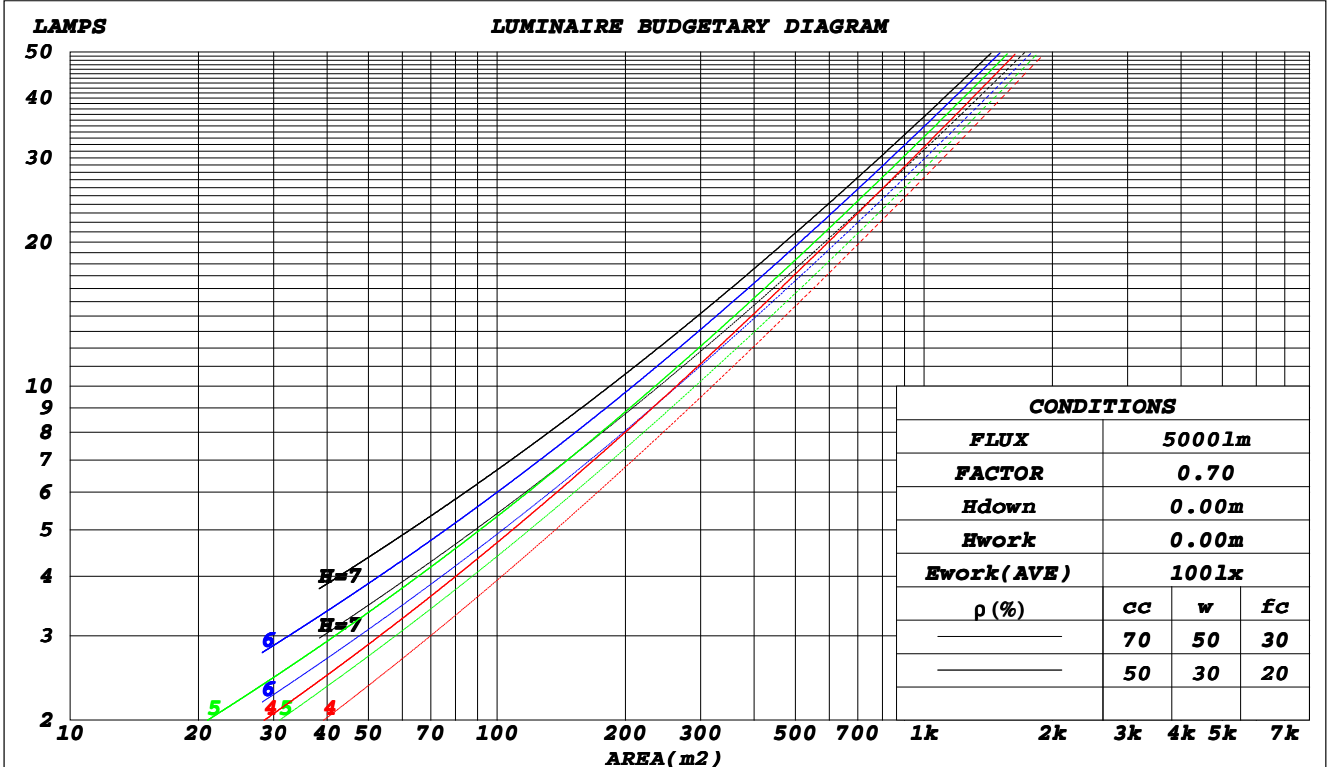

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.274	.156	.049	.266	.152	.048	.252	.144	.046	.238	.137	.044	.226	.131	.042	
2.0	.263	.144	.044	.256	.141	.044	.244	.135	.042	.232	.130	.041	.221	.125	.039	
3.0	.247	.132	.039	.241	.129	.039	.230	.125	.038	.219	.120	.037	.210	.116	.036	
4.0	.231	.120	.035	.225	.118	.035	.215	.114	.034	.206	.111	.033	.197	.107	.033	
5.0	.215	.110	.032	.210	.108	.031	.201	.105	.031	.193	.102	.030	.185	.099	.030	
6.0	.201	.101	.029	.197	.099	.029	.189	.097	.028	.181	.094	.028	.174	.092	.027	
7.0	.188	.093	.026	.184	.092	.026	.177	.090	.026	.170	.087	.025	.164	.085	.025	
8.0	.177	.086	.024	.173	.085	.024	.167	.083	.024	.161	.081	.023	.155	.079	.023	
9.0	.166	.080	.022	.163	.079	.022	.157	.078	.022	.152	.076	.022	.146	.074	.021	
10.0	.157	.075	.021	.154	.074	.021	.149	.073	.021	.144	.071	.020	.139	.070	.020	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.198	.176	.157	.169	.151	.135	.116	.104	.093	.067	.060	.054	.021	.019	.018	
2.0	.188	.152	.121	.161	.131	.105	.110	.090	.073	.064	.053	.043	.020	.017	.014	
3.0	.180	.134	.097	.154	.116	.084	.106	.080	.059	.061	.047	.035	.020	.015	.011	
4.0	.172	.121	.081	.148	.104	.070	.102	.073	.050	.059	.043	.029	.019	.014	.010	
5.0	.165	.110	.069	.142	.095	.060	.098	.067	.043	.057	.039	.025	.018	.013	.008	
6.0	.158	.102	.061	.136	.088	.053	.094	.062	.038	.054	.036	.022	.018	.012	.007	
7.0	.152	.095	.055	.130	.082	.048	.090	.058	.034	.052	.034	.020	.017	.011	.007	
8.0	.145	.089	.050	.125	.077	.044	.087	.054	.031	.050	.032	.018	.016	.010	.006	
9.0	.140	.084	.046	.120	.073	.040	.083	.051	.029	.049	.030	.017	.016	.010	.006	
10.0	.134	.080	.043	.116	.069	.038	.080	.049	.027	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.2	25.1	26.4	26.6	24.7	26.1	25.0	26.3	26.6
3H	25.8	27.1	26.1	27.3	27.6	25.6	26.9	26.0	27.2	27.5
4H	26.1	27.3	26.4	27.6	27.9	25.9	27.1	26.2	27.4	27.7
6H	26.2	27.3	26.5	27.6	27.9	25.9	27.1	26.3	27.4	27.7
8H	26.2	27.2	26.5	27.6	27.9	25.9	27.0	26.3	27.4	27.7
12H	26.1	27.2	26.5	27.5	27.9	25.9	27.0	26.3	27.3	27.7
4H 2H	25.2	26.4	25.5	26.7	27.0	25.1	26.3	25.5	26.6	26.9
3H	26.3	27.4	26.7	27.7	28.1	26.2	27.3	26.6	27.6	27.9
4H	26.7	27.7	27.1	28.0	28.4	26.5	27.5	26.9	27.8	28.2
6H	26.9	27.7	27.3	28.1	28.5	26.6	27.5	27.1	27.9	28.3
8H	26.9	27.6	27.3	28.1	28.5	26.7	27.4	27.1	27.9	28.3
12H	26.9	27.6	27.3	28.0	28.5	26.7	27.4	27.1	27.8	28.3
8H 4H	26.8	27.6	27.2	28.0	28.4	26.6	27.4	27.0	27.8	28.2
6H	27.0	27.6	27.5	28.1	28.5	26.8	27.4	27.3	27.9	28.4
8H	27.0	27.6	27.5	28.1	28.6	26.8	27.4	27.3	27.9	28.4
12H	27.0	27.5	27.6	28.0	28.6	26.9	27.4	27.4	27.9	28.4
12H 4H	26.7	27.5	27.2	27.9	28.3	26.6	27.3	27.0	27.7	28.2
6H	27.0	27.5	27.5	28.0	28.5	26.8	27.3	27.3	27.8	28.3
8H	27.0	27.5	27.5	28.0	28.5	26.8	27.3	27.4	27.8	28.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.5				

CIE Pub.117, 2935 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.7)
 Area: 0.025 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	61	50	43	60	49	43	59	49	43	37
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	68	62	75	69	61	54
1.25	86	76	70	84	75	69	82	74	68	61
1.50	91	82	75	89	81	75	86	79	73	66
2.00	97	89	83	95	88	83	91	86	81	73
2.50	101	94	88	98	92	87	94	89	85	76
3.00	104	97	92	101	96	91	97	92	89	80
4.00	107	102	98	105	100	96	100	96	93	84
5.00	109	105	101	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

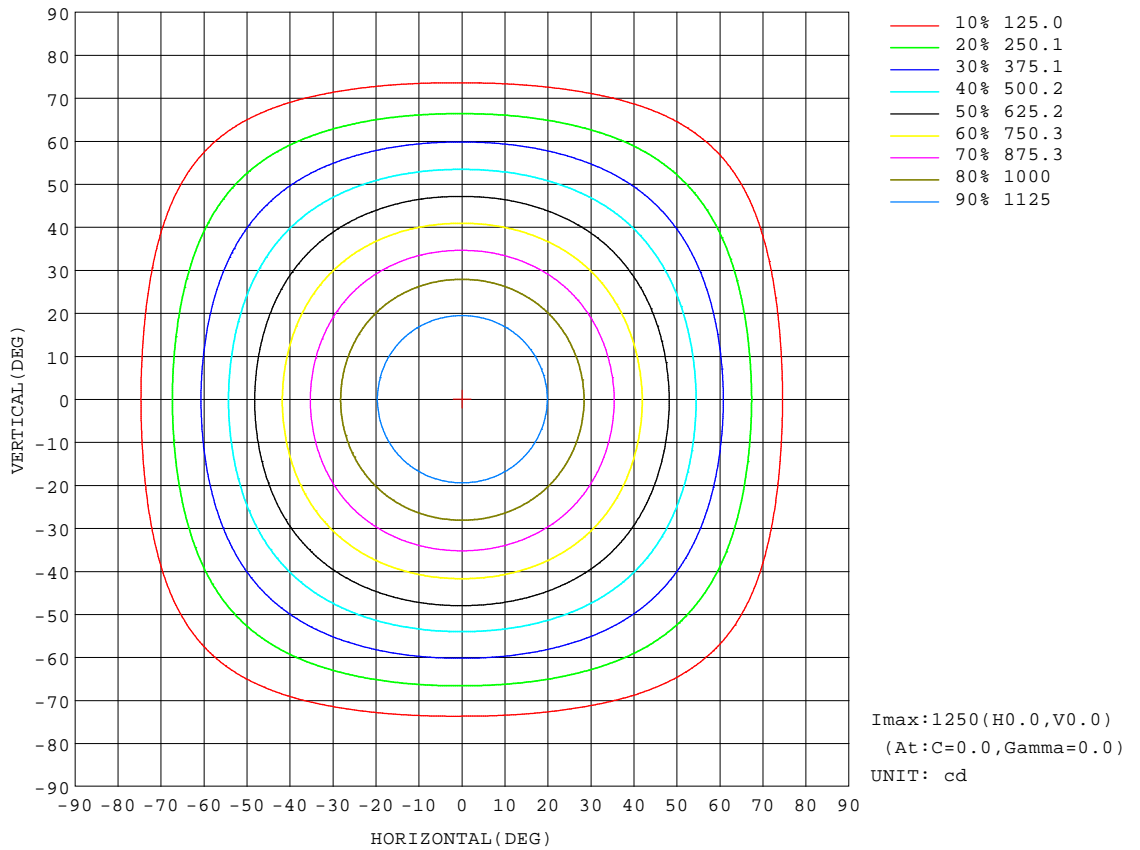


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

Flux out:1905 lm

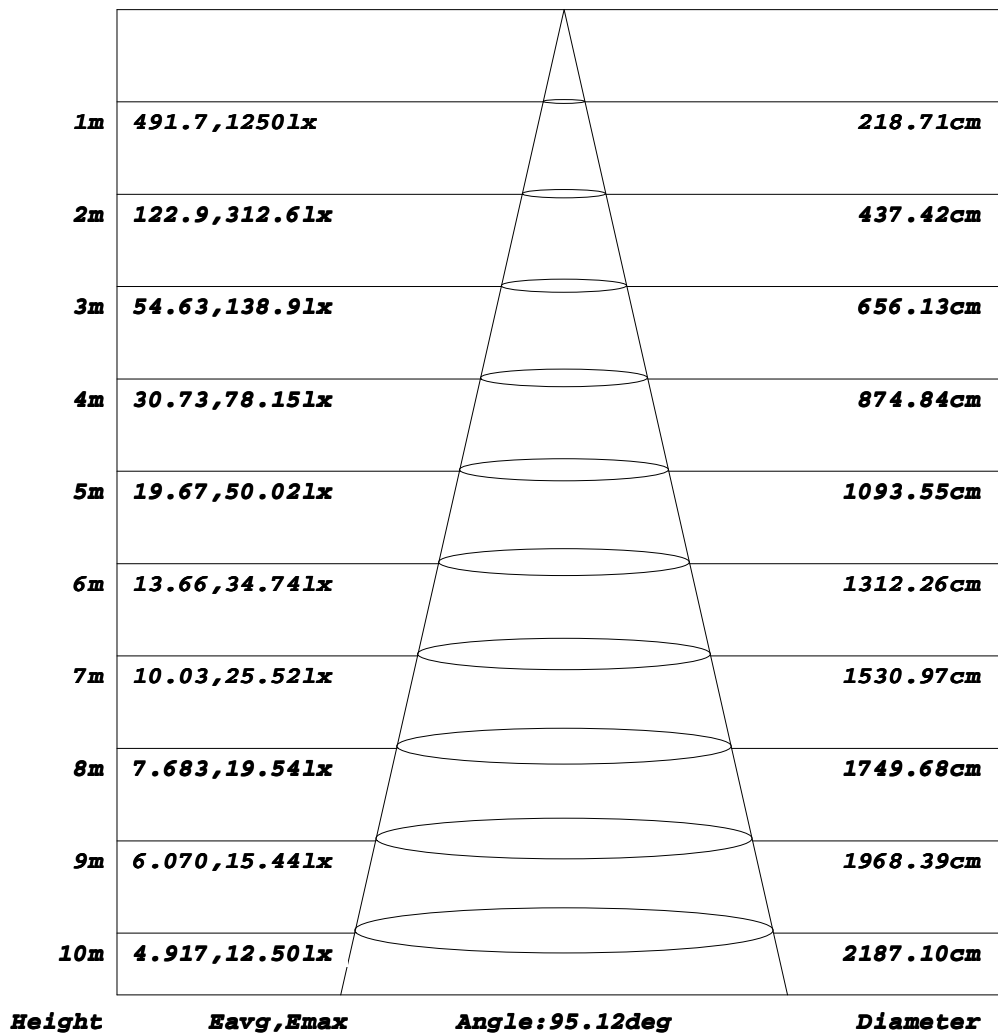


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

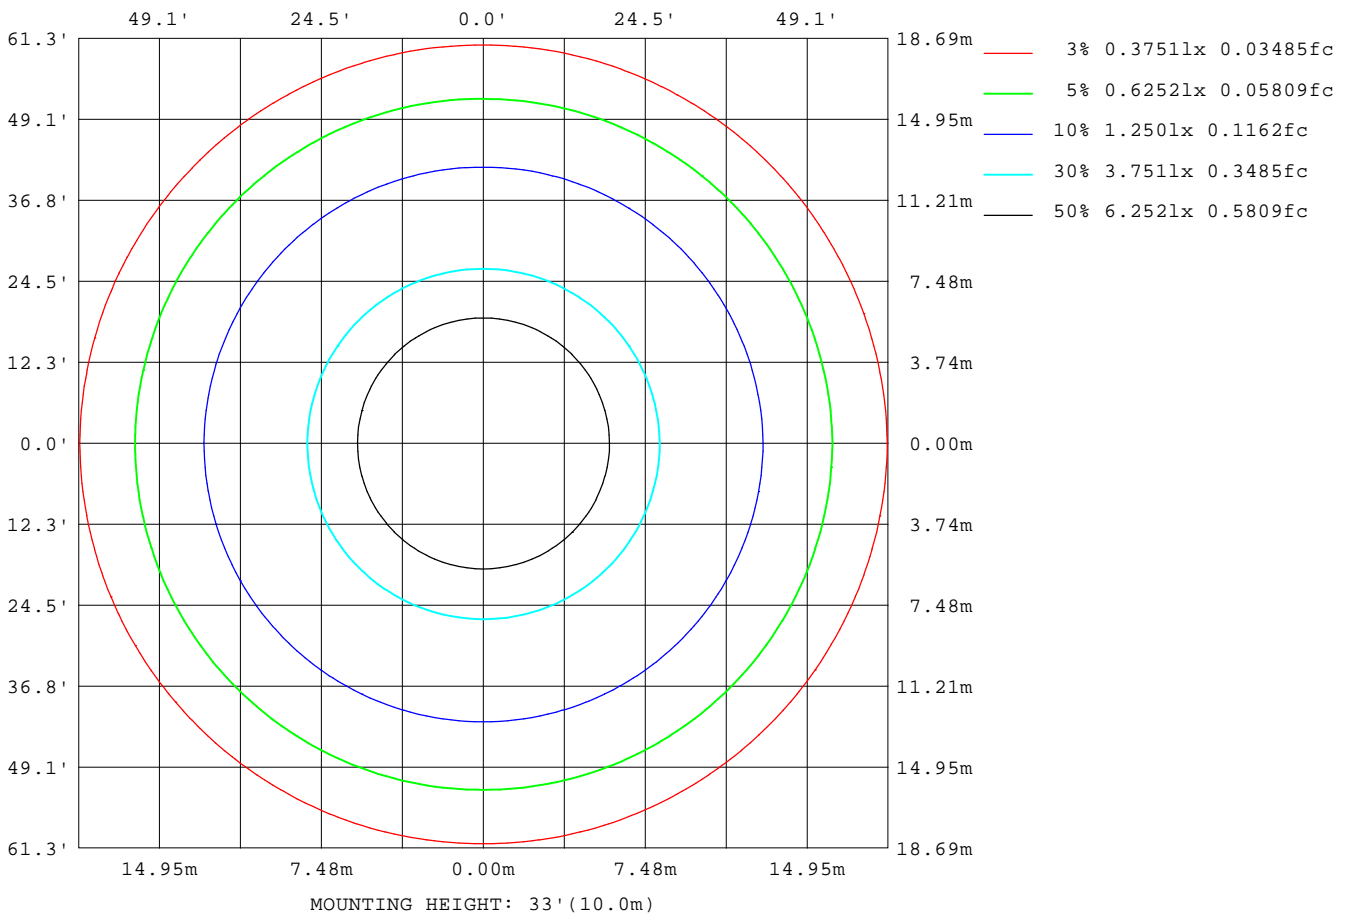

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

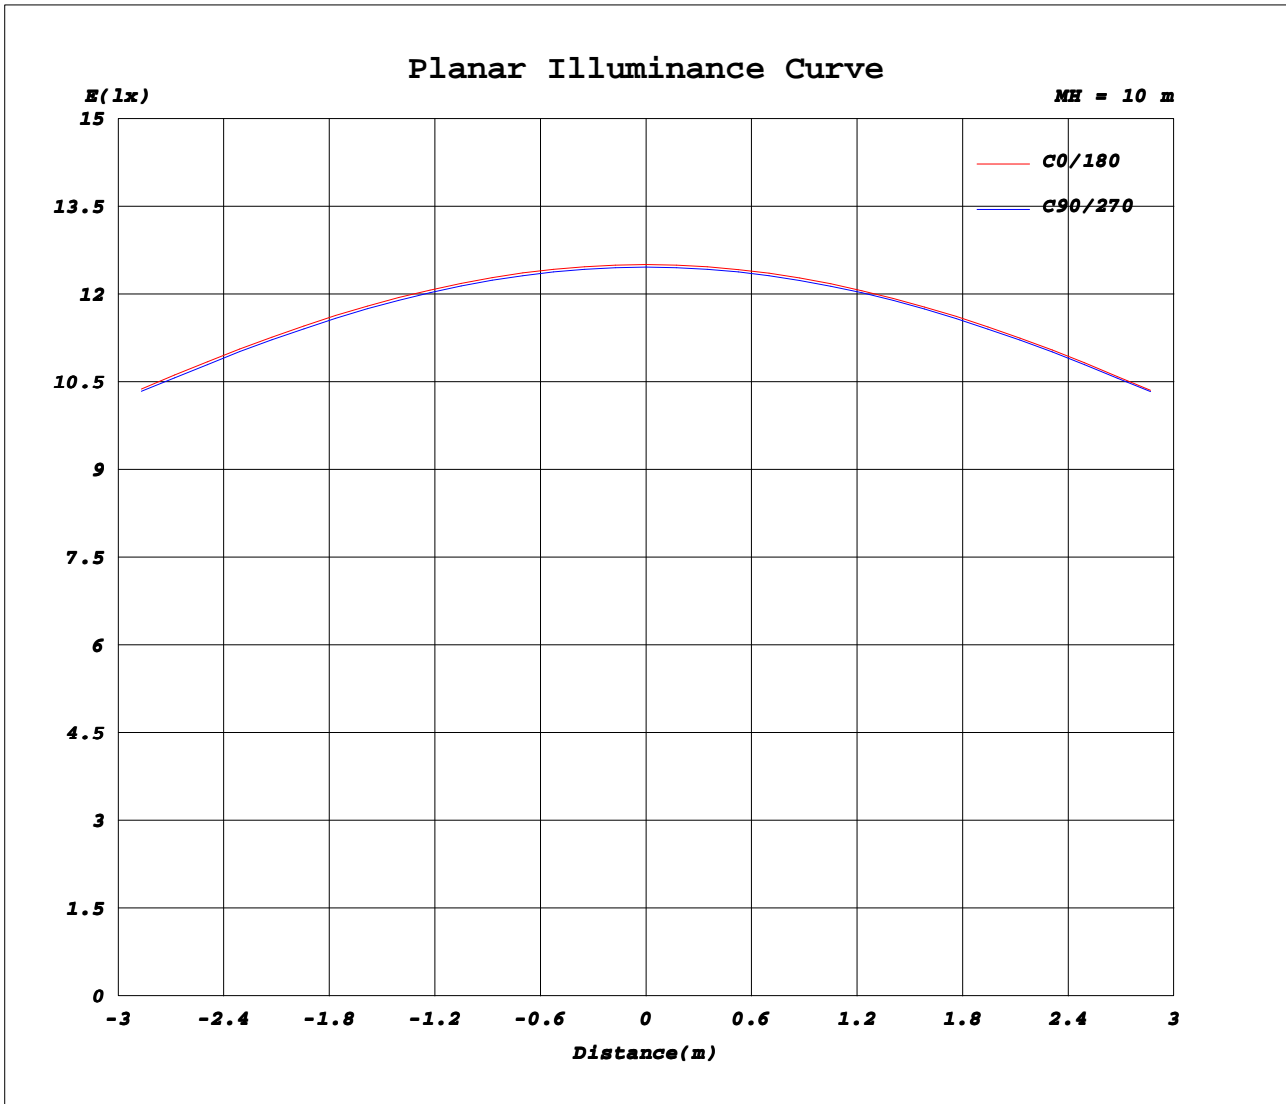

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.1330A P:28.400W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2935.2lx1 lm		
Name: NS11-φ230MM-29W	Type: LED	
MFR.: Lumega Group	DIM.: D230*H90mm	
	SUR.: D180mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1250	1248	1247	1246	1247	1249	1250	1249	1247	1246	1247	1248							
5	1243	1240	1238	1238	1239	1241	1242	1240	1239	1238	1238	1240							
10	1218	1216	1214	1213	1214	1215	1217	1215	1214	1213	1213	1215							
15	1178	1176	1174	1173	1174	1175	1176	1174	1173	1173	1173	1175							
20	1124	1121	1120	1119	1119	1120	1121	1120	1119	1118	1119	1121							
25	1055	1053	1051	1050	1051	1052	1052	1051	1049	1048	1049	1052							
30	974	971	970	969	969	970	970	967	964	962	964	968							
35	883	882	881	880	881	881	881	875	870	867	869	874							
40	788	787	786	785	785	785	784	778	771	768	770	777							
45	688	687	686	686	687	689	688	681	673	667	669	676							
50	590	587	585	584	586	588	589	581	573	567	570	577							
55	490	485	482	481	483	485	486	480	473	469	471	479							
60	391	385	381	380	383	386	389	382	375	370	373	380							
65	295	288	283	281	285	290	293	287	280	275	278	284							
70	202	194	189	187	192	198	202	196	189	184	186	192							
75	118	111	107	106	110	116	120	115	108	103	104	109							
80	49.8	48.2	47.6	48.0	50.8	53.5	55.1	51.4	46.9	43.1	43.3	45.5							
85	19.8	19.9	20.1	20.5	21.2	21.8	22.0	20.5	18.8	17.5	17.5	18.3							
90	5.04	4.87	4.95	5.26	6.07	6.94	7.68	7.84	7.72	7.35	6.80	6.03							
95	5.25	5.10	5.15	5.39	5.97	6.63	7.27	7.71	7.94	7.88	7.37	6.49							
100	6.16	5.91	5.89	6.10	6.72	7.43	8.11	8.51	8.70	8.62	8.13	7.31							
105	7.18	6.92	6.88	7.09	7.70	8.42	9.09	9.47	9.63	9.52	9.05	8.27							
110	8.32	8.02	7.97	8.16	8.78	9.50	10.2	10.5	10.7	10.5	10.1	9.34							
115	9.51	9.11	8.99	9.16	9.82	10.6	11.3	11.7	11.8	11.6	11.2	10.5							
120	10.7	10.3	10.2	10.4	11.0	11.8	12.5	12.8	12.9	12.7	12.3	11.6							
125	11.8	11.5	11.4	11.6	12.2	13.0	13.6	13.9	13.9	13.7	13.3	12.7							
130	13.0	12.7	12.6	12.8	13.4	14.1	14.7	14.9	15.0	14.8	14.4	13.8							
135	14.0	13.7	13.7	13.9	14.5	15.1	15.7	15.9	15.9	15.7	15.3	14.7							
140	14.9	14.7	14.7	14.9	15.4	16.0	16.6	16.8	16.8	16.6	16.2	15.6							
145	15.7	15.6	15.7	15.8	16.3	16.9	17.3	17.5	17.4	17.3	16.9	16.4							
150	16.5	16.4	16.5	16.7	17.1	17.6	18.0	18.1	18.0	17.8	17.5	17.1							
155	17.3	17.4	17.5	17.6	18.0	18.3	18.6	18.6	18.6	18.5	18.2	17.8							
160	18.1	18.2	18.2	18.4	18.6	18.9	19.1	19.1	19.1	19.0	18.8	18.5							
165	18.8	18.9	19.0	19.1	19.2	19.4	19.5	19.5	19.5	19.5	19.3	19.1							
170	19.4	19.5	19.6	19.6	19.7	19.8	19.9	19.9	19.8	19.8	19.7	19.6							
175	20.0	20.0	20.0	20.0	20.1	20.2	20.2	20.1	20.1	20.0	20.0	20.0							
180	20.3	20.2	20.2	20.2	20.2	20.3	20.4	20.3	20.2	20.1	20.1	20.2							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: