
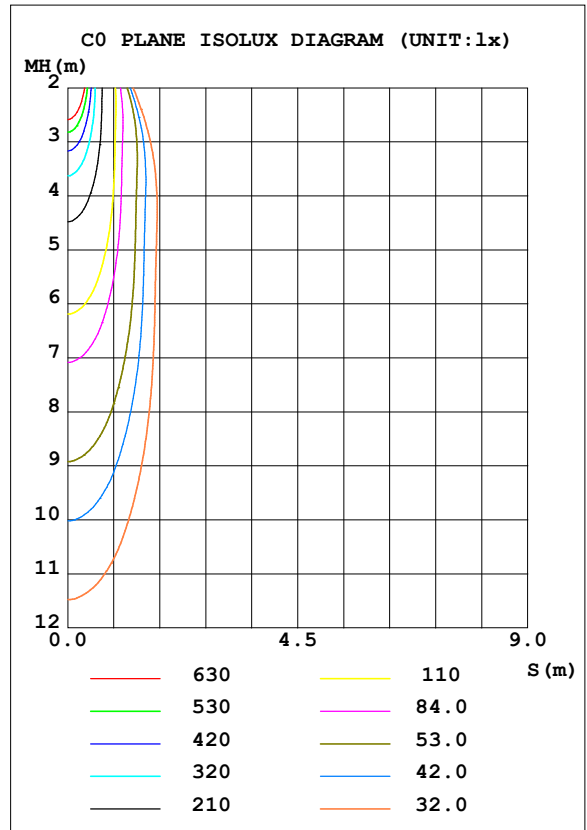


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.77 lm/W			
MODEL		I _{max} (cd)	4287	S/MH (C0/180)	0.39
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.39
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1140.8	η UP, DN (C0-180)	0.5, 49.5
NOMINAL FLUX (lm)	1140.77	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 49.5
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	0.30

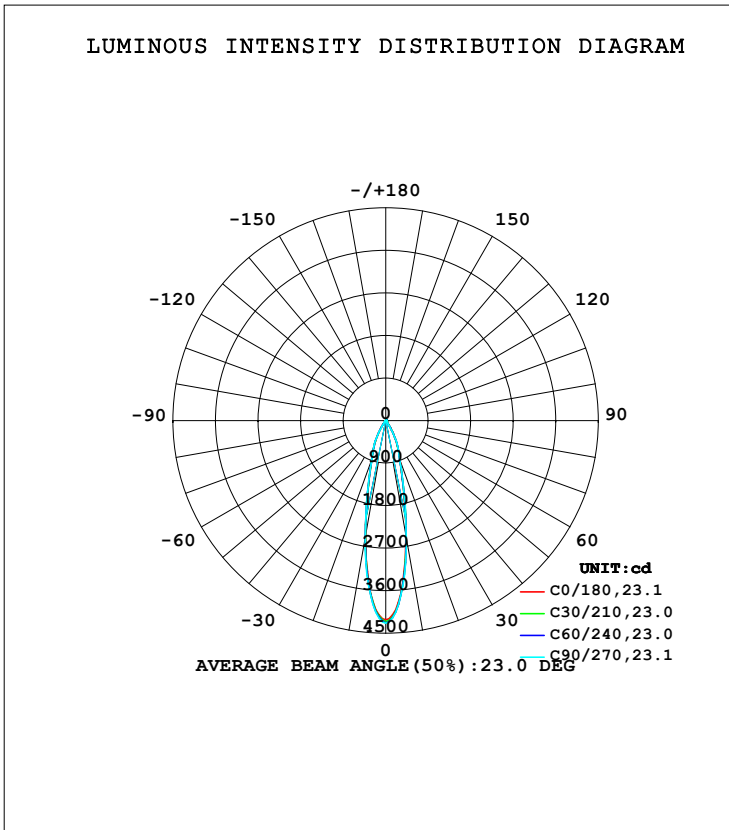

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2473	2498	2507	2490	2473	2490	2507	2498	0- 10	313.2	313.2	27.5,27.5
20	880.1	872.0	869.0	874.5	880.1	874.5	869.0	872.0	10- 20	409.2	722.4	63.3,63.3
30	338.7	334.3	332.6	335.6	338.7	335.6	332.6	334.3	20- 30	267.8	990.2	86.8,86.8
40	41.75	40.71	40.31	41.03	41.75	41.03	40.31	40.71	30- 40	87.08	1077	94.4,94.4
50	15.29	15.60	15.72	15.51	15.29	15.51	15.72	15.60	40- 50	18.15	1095	96,96
60	12.36	12.38	12.39	12.37	12.36	12.37	12.39	12.38	50- 60	12.13	1108	97.1,97.1
70	9.384	9.557	9.623	9.504	9.384	9.504	9.623	9.557	60- 70	11.07	1119	98.1,98.1
80	6.183	6.157	6.146	6.165	6.183	6.165	6.146	6.157	70- 80	8.515	1127	98.8,98.8
90	1.291	1.272	1.265	1.278	1.291	1.278	1.265	1.272	80- 90	3.021	1130	99.1,99.1
100	1.552	1.519	1.506	1.529	1.552	1.529	1.506	1.519	90-100	1.519	1132	99.2,99.2
110	1.967	1.923	1.907	1.937	1.967	1.937	1.907	1.923	100-110	1.801	1133	99.4,99.4
120	2.415	2.416	2.416	2.416	2.415	2.416	2.416	2.416	110-120	2.183	1136	99.6,99.6
130	2.264	2.062	1.984	2.124	2.264	2.124	1.984	2.062	120-130	2.097	1138	99.7,99.7
140	1.628	1.447	1.378	1.503	1.628	1.503	1.378	1.447	130-140	1.380	1139	99.9,99.9
150	1.239	1.166	1.137	1.188	1.239	1.188	1.137	1.166	140-150	0.8305	1140	99.9,99.9
160	0.9985	0.9608	0.9462	0.9724	0.9985	0.9724	0.9462	0.9608	150-160	0.4981	1140	100,100
170	0.7535	0.7263	0.7158	0.7346	0.7535	0.7346	0.7158	0.7263	160-170	0.2460	1141	100,100
180	0.6120	0.6049	0.6022	0.6071	0.6120	0.6071	0.6022	0.6049	170-180	0.0642	1141	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

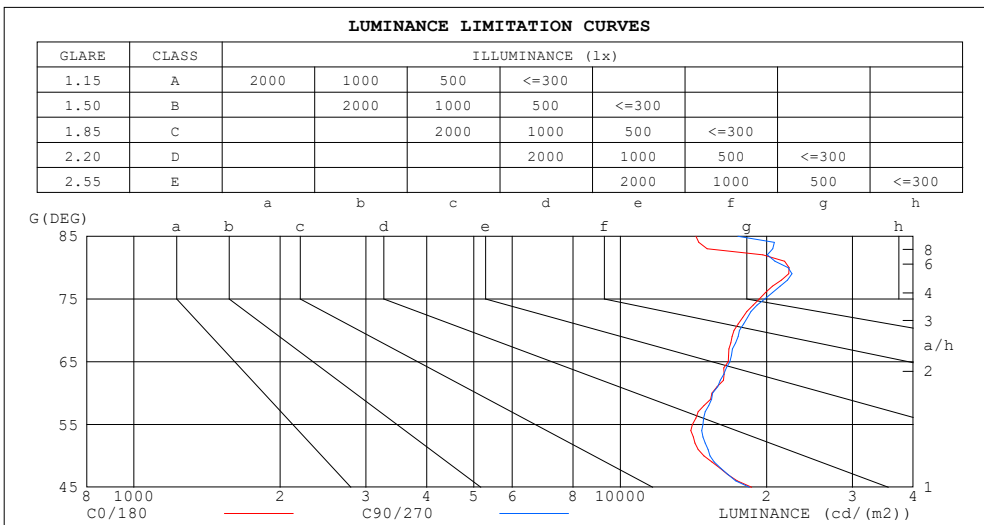

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14307	17437
80	22253	22122
75	19312	19827
70	17148	17585
65	16669	16804
60	15444	15484
55	14080	14799
50	14864	15289
45	18624	18437


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.02	.99	1.03	1.00	.98	1.00	.97	.95	.97	.95	.93	.94	.93	.91	.89
3.0	.90	.95	.92	.98	.94	.91	.96	.92	.90	.93	.90	.88	.91	.89	.87	.85
4.0	.95	.90	.87	.94	.89	.86	.91	.88	.85	.89	.86	.84	.88	.85	.83	.82
5.0	.90	.86	.82	.90	.85	.82	.88	.84	.81	.86	.83	.80	.85	.82	.79	.78
6.0	.87	.82	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
8.0	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.69
9.0	.77	.72	.69	.76	.72	.69	.76	.71	.69	.75	.71	.68	.74	.71	.68	.67
10.0	.74	.70	.66	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.66	.65

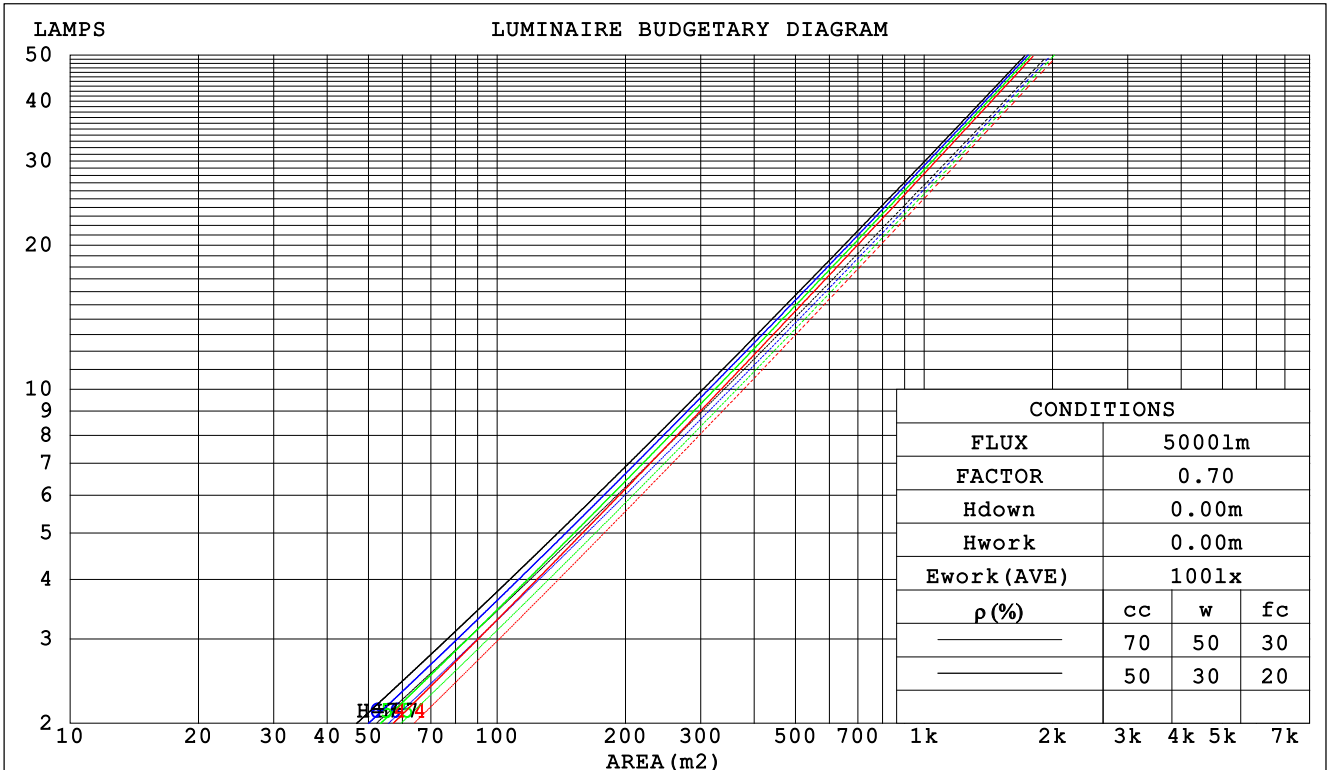

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.160	.091	.029	.153	.087	.028	.140	.080	.026	.128	.074	.024	.117	.068	.022	
2.0	.149	.081	.025	.143	.079	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020	
3.0	.139	.074	.022	.134	.072	.022	.125	.068	.021	.116	.064	.020	.108	.060	.019	
4.0	.130	.068	.020	.126	.066	.019	.118	.063	.019	.111	.059	.018	.104	.056	.017	
5.0	.123	.062	.018	.119	.061	.018	.112	.058	.017	.106	.056	.017	.100	.053	.016	
6.0	.116	.058	.017	.113	.057	.016	.107	.055	.016	.101	.053	.015	.096	.051	.015	
7.0	.110	.054	.015	.107	.053	.015	.102	.052	.015	.097	.050	.014	.093	.048	.014	
8.0	.105	.051	.014	.102	.050	.014	.098	.049	.014	.093	.047	.014	.089	.046	.013	
9.0	.100	.048	.014	.098	.048	.013	.094	.046	.013	.090	.045	.013	.086	.044	.013	
10.0	.096	.046	.013	.094	.045	.013	.090	.044	.012	.087	.043	.012	.083	.042	.012	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.177	.165	.153	.152	.141	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.160	.140	.123	.137	.120	.106	.094	.083	.074	.054	.048	.043	.017	.016	.014	
3.0	.146	.121	.100	.126	.104	.087	.086	.072	.061	.050	.042	.036	.016	.014	.012	
4.0	.135	.106	.083	.116	.091	.072	.080	.064	.051	.046	.037	.030	.015	.012	.010	
5.0	.125	.094	.070	.107	.081	.061	.074	.057	.043	.043	.033	.026	.014	.011	.008	
6.0	.116	.084	.061	.100	.073	.053	.069	.051	.037	.040	.030	.022	.013	.010	.007	
7.0	.109	.076	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
8.0	.103	.069	.046	.089	.060	.040	.061	.042	.029	.036	.025	.017	.012	.008	.006	
9.0	.097	.064	.041	.084	.055	.036	.058	.039	.026	.034	.023	.015	.011	.008	.005	
10.0	.093	.059	.037	.080	.051	.032	.055	.036	.023	.032	.021	.014	.010	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	17.9	17.4	18.1	18.3	17.0	17.8	17.2	17.9	18.1
3H	18.0	18.7	18.2	18.9	19.1	17.8	18.5	18.1	18.8	19.0
4H	18.5	19.2	18.8	19.4	19.6	18.4	19.1	18.7	19.3	19.5
6H	19.1	19.8	19.4	20.0	20.3	19.1	19.7	19.4	20.0	20.2
8H	19.3	19.9	19.6	20.2	20.5	19.3	19.9	19.6	20.2	20.5
12H	19.4	20.0	19.7	20.3	20.5	19.4	20.0	19.8	20.3	20.6
4H 2H	17.3	18.0	17.6	18.2	18.5	17.2	17.8	17.5	18.1	18.3
3H	18.4	19.0	18.7	19.3	19.6	18.3	18.9	18.6	19.2	19.5
4H	19.1	19.7	19.5	20.0	20.3	19.1	19.6	19.4	19.9	20.3
6H	20.0	20.5	20.4	20.8	21.2	20.0	20.5	20.4	20.8	21.2
8H	20.3	20.7	20.7	21.1	21.5	20.3	20.7	20.7	21.1	21.5
12H	20.4	20.8	20.8	21.2	21.6	20.5	20.9	20.9	21.3	21.7
8H 4H	19.5	19.9	19.9	20.3	20.6	19.4	19.9	19.8	20.2	20.6
6H	20.5	20.9	20.9	21.3	21.7	20.5	20.9	20.9	21.3	21.7
8H	20.8	21.2	21.3	21.6	22.1	20.9	21.2	21.3	21.6	22.1
12H	21.0	21.3	21.5	21.7	22.2	21.1	21.4	21.6	21.9	22.4
12H 4H	19.5	19.9	19.9	20.3	20.7	19.4	19.9	19.9	20.2	20.7
6H	20.6	20.9	21.0	21.3	21.8	20.6	20.9	21.0	21.3	21.8
8H	21.0	21.2	21.4	21.7	22.2	21.0	21.3	21.5	21.7	22.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.7 / - 0.4					+ 0.5 / - 0.4				
1.5H	+ 1.5 / - 0.4					+ 1.0 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.2				

CIE Pub.117, 1141 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.5)
 Area: 0.0016 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	88	82	78	87	81	78	75
0.80	95	90	86	95	89	86	93	89	85	82
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	109	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	108	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

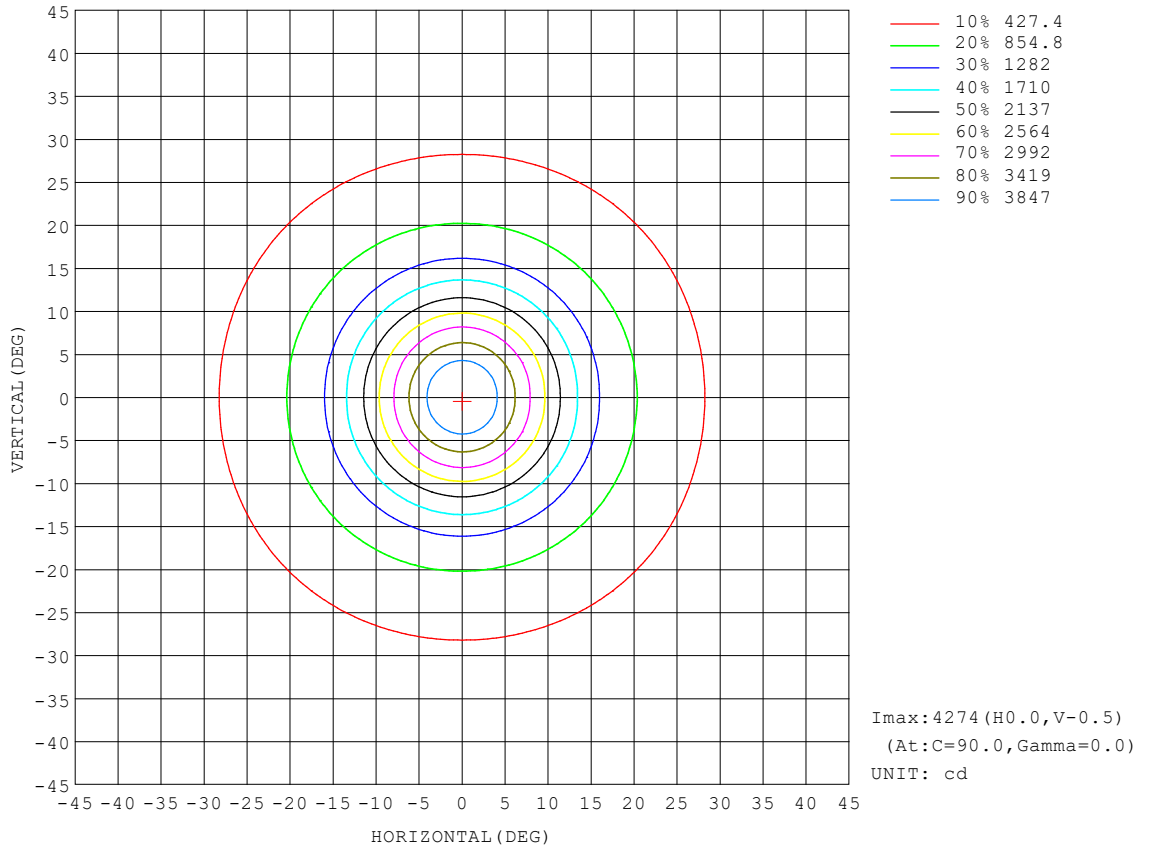


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

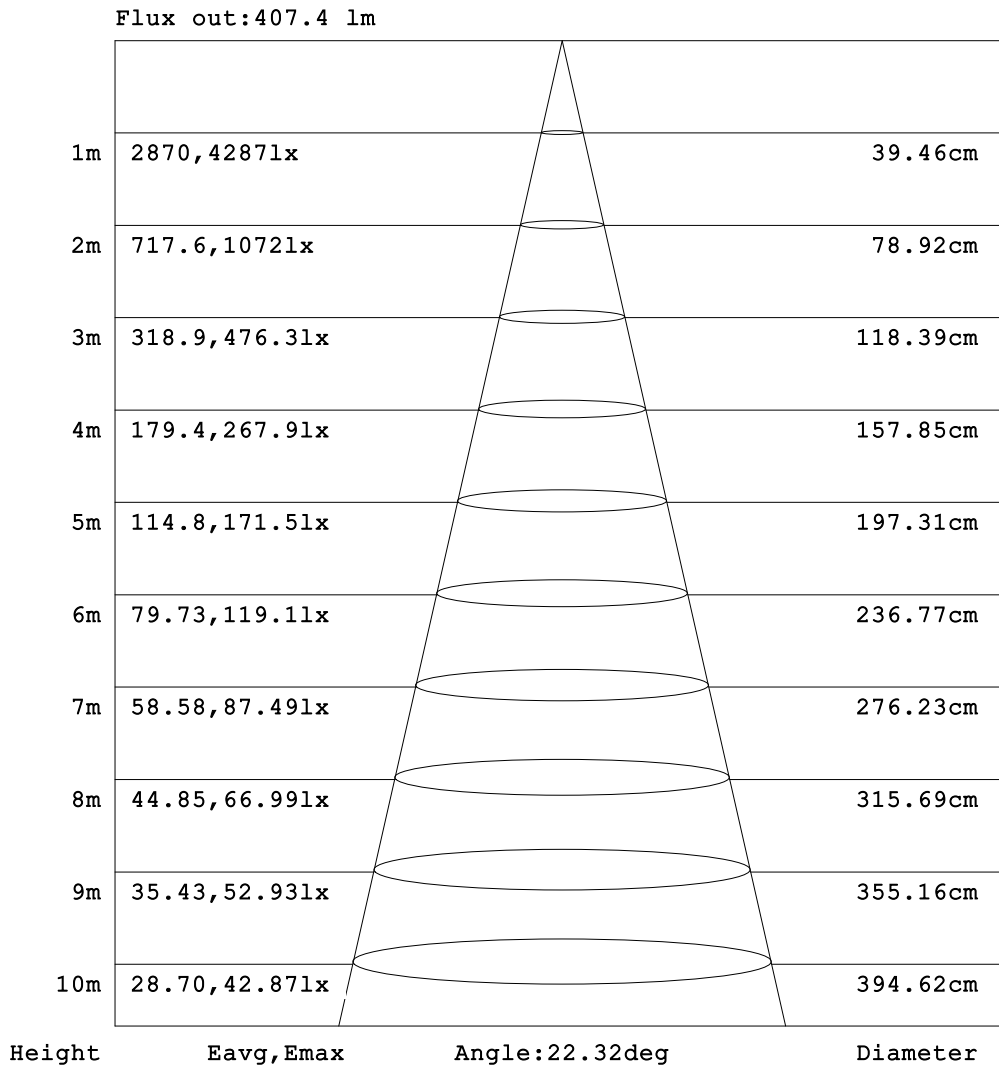


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

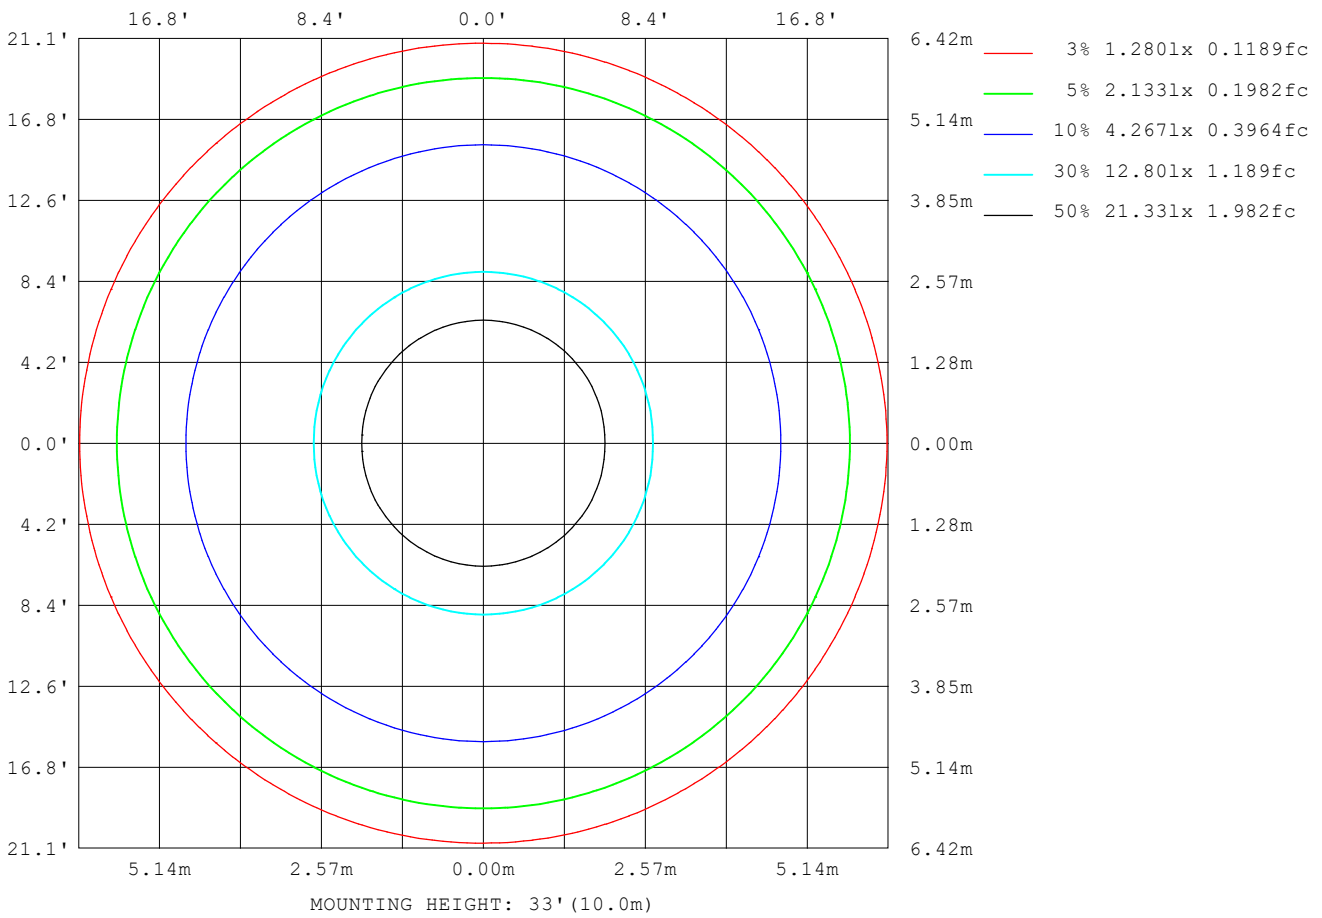

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

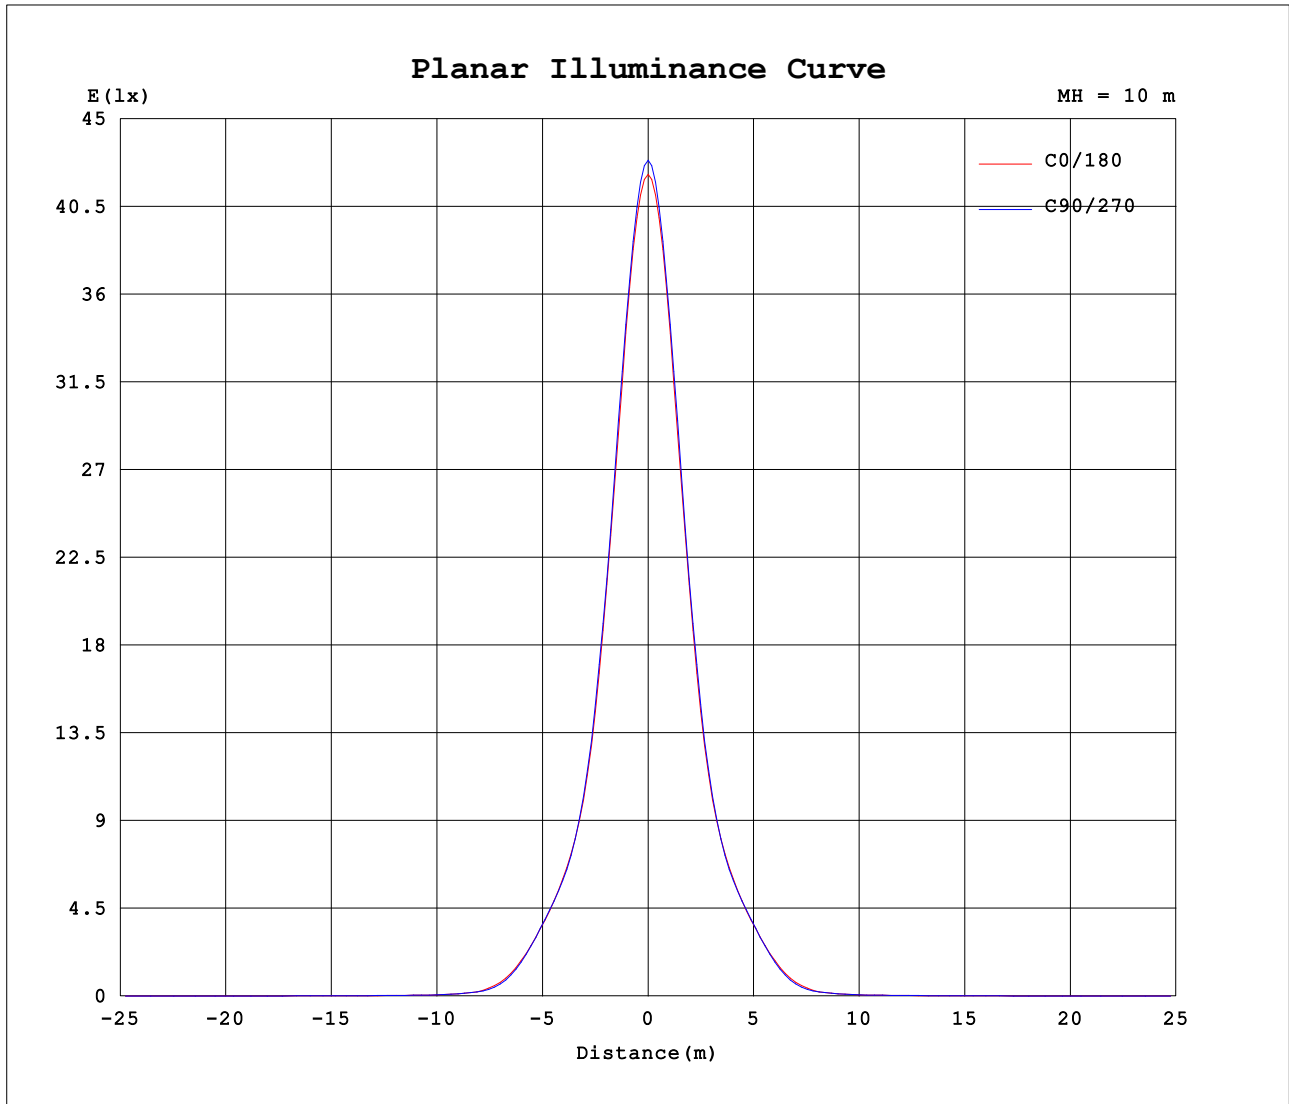

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.0670A P:11.100W PF:0.9750 Freq:50.00Hz		
Lamp Flux:1140.77x1 lm		
Name: NS27-10W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4215	4255	4279	4287	4265	4237	4215	4237	4265	4287	4279	4255							
5	3677	3696	3708	3712	3701	3688	3677	3688	3701	3712	3708	3696							
10	2473	2492	2503	2507	2497	2483	2473	2483	2497	2507	2503	2492							
15	1428	1443	1451	1454	1446	1436	1428	1436	1446	1454	1451	1443							
20	880	874	870	869	872	877	880	877	872	869	870	874							
25	589	591	593	594	592	590	589	590	592	594	593	591							
30	339	335	333	333	334	337	339	337	334	333	333	335							
35	131	122	117	116	120	126	131	126	120	116	117	122							
40	41.7	40.9	40.5	40.3	40.8	41.3	41.7	41.3	40.8	40.3	40.5	40.9							
45	21.1	21.0	20.9	20.9	20.9	21.0	21.1	21.0	20.9	20.9	20.9	21.0							
50	15.3	15.5	15.7	15.7	15.6	15.4	15.3	15.4	15.6	15.7	15.7	15.5							
55	12.9	13.3	13.5	13.6	13.4	13.1	12.9	13.1	13.4	13.6	13.5	13.3							
60	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4							
65	11.3	11.3	11.4	11.4	11.3	11.3	11.3	11.3	11.3	11.4	11.4	11.3							
70	9.38	9.52	9.60	9.62	9.55	9.46	9.38	9.46	9.55	9.62	9.60	9.52							
75	8.00	8.12	8.19	8.21	8.14	8.06	8.00	8.06	8.14	8.21	8.19	8.12							
80	6.18	6.16	6.15	6.15	6.16	6.17	6.18	6.17	6.16	6.15	6.15	6.16							
85	2.00	2.24	2.38	2.43	2.30	2.13	2.00	2.13	2.30	2.43	2.38	2.24							
90	1.29	1.28	1.27	1.26	1.27	1.28	1.29	1.28	1.27	1.26	1.27	1.28							
95	1.40	1.39	1.39	1.39	1.39	1.39	1.40	1.39	1.39	1.39	1.39	1.39							
100	1.55	1.53	1.51	1.51	1.52	1.54	1.55	1.54	1.52	1.51	1.51	1.53							
105	1.74	1.69	1.66	1.66	1.68	1.71	1.74	1.71	1.68	1.66	1.66	1.69							
110	1.97	1.93	1.91	1.91	1.93	1.95	1.97	1.95	1.93	1.91	1.91	1.93							
115	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.22							
120	2.42	2.42	2.42	2.42	2.42	2.42	2.42	2.42	2.42	2.42	2.42	2.42							
125	2.45	2.38	2.33	2.32	2.36	2.41	2.45	2.41	2.36	2.32	2.33	2.38							
130	2.26	2.11	2.01	1.98	2.07	2.18	2.26	2.18	2.07	1.98	2.01	2.11							
135	1.96	1.76	1.65	1.61	1.72	1.85	1.96	1.85	1.72	1.61	1.65	1.76							
140	1.63	1.49	1.41	1.38	1.46	1.55	1.63	1.55	1.46	1.38	1.41	1.49							
145	1.39	1.31	1.26	1.25	1.29	1.35	1.39	1.35	1.29	1.25	1.26	1.31							
150	1.24	1.18	1.15	1.14	1.17	1.21	1.24	1.21	1.17	1.14	1.15	1.18							
155	1.12	1.07	1.04	1.03	1.06	1.09	1.12	1.09	1.06	1.03	1.04	1.07							
160	1.00	0.97	0.95	0.95	0.96	0.98	1.00	0.98	0.96	0.95	0.95	0.97							
165	0.87	0.86	0.85	0.85	0.86	0.86	0.87	0.86	0.86	0.85	0.85	0.86							
170	0.75	0.73	0.72	0.72	0.73	0.74	0.75	0.74	0.73	0.72	0.72	0.73							
175	0.66	0.64	0.63	0.62	0.63	0.65	0.66	0.65	0.63	0.62	0.63	0.64							
180	0.61	0.61	0.60	0.60	0.61	0.61	0.61	0.61	0.61	0.60	0.60	0.61							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: