
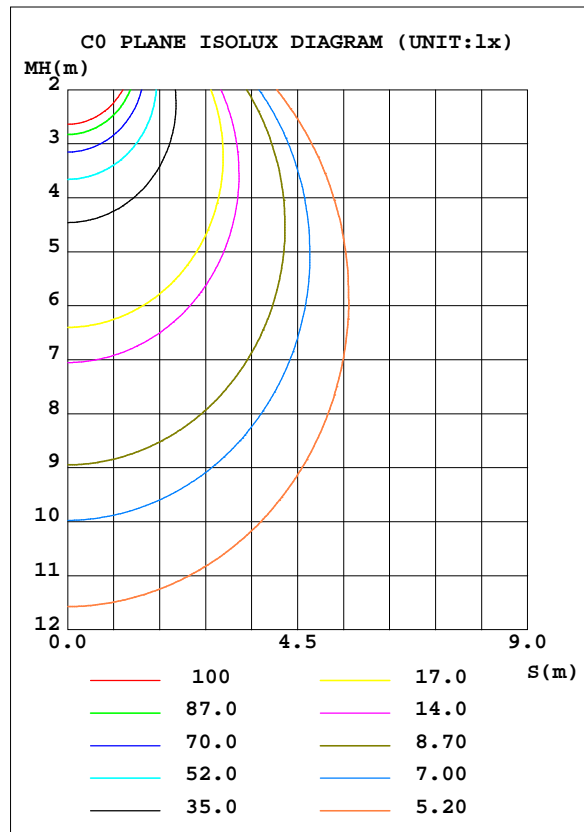


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.78 lm/W			
MODEL		I _{max} (cd)	696.6	S/MH(C0/180)	1.23
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1996.1	η UP, DN(C0-180)	1.2,49.4
NOMINAL FLUX(lm)	1996.06	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.2
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	97.6	CIBSE SHR MAX	1.35

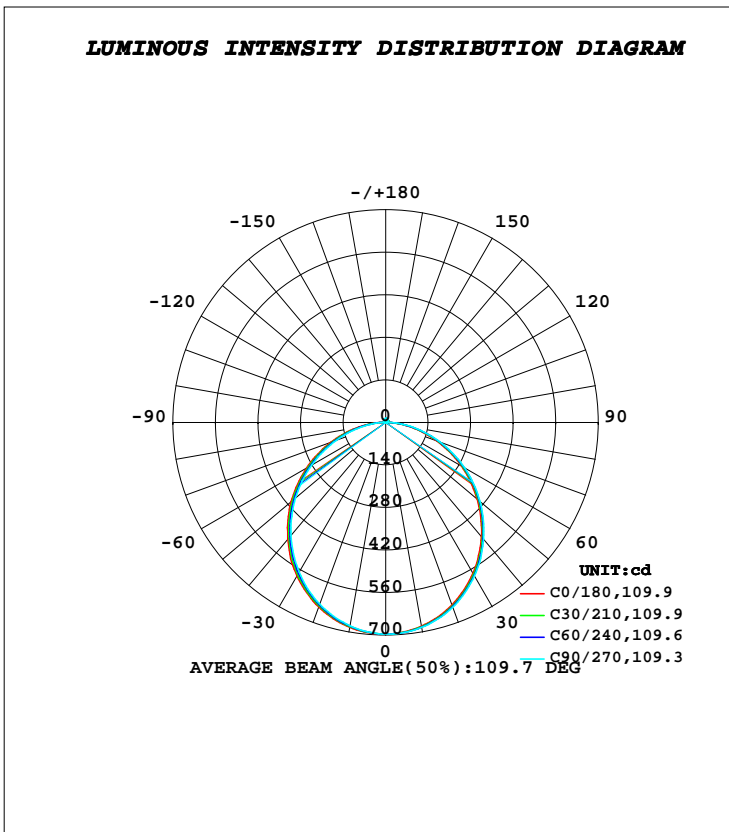

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	680.8	683.3	684.9	685.2	684.4	681.5	679.0	679.1	0- 10	65.80	65.80	3.3,3.3
20	639.1	643.7	646.5	647.1	645.9	640.7	635.9	636.1	10- 20	187.7	253.5	12.7,12.7
30	573.9	580.1	584.0	585.2	583.7	576.6	570.0	570.0	20- 30	282.2	535.6	26.8,26.8
40	490.7	497.2	501.4	502.9	501.4	493.1	485.4	485.6	30- 40	336.7	872.3	43.7,43.7
50	394.1	401.2	405.9	408.3	407.2	397.2	387.8	388.1	40- 50	345.4	1218	61,61
60	288.3	295.8	300.6	302.6	301.0	290.8	281.4	281.9	50- 60	309.6	1527	76.5,76.5
70	179.3	187.3	192.5	194.5	192.9	182.8	173.4	173.5	60- 70	236.1	1763	88.3,88.3
80	77.58	85.11	90.02	91.99	90.64	81.73	73.24	72.99	70- 80	139.9	1903	95.4,95.4
90	3.245	5.598	7.032	7.194	6.679	5.573	4.379	3.683	80- 90	43.78	1947	97.6,97.6
100	4.401	4.124	4.155	4.703	5.301	5.534	5.517	5.107	90-100	4.749	1952	97.8,97.8
110	5.767	5.583	5.628	6.042	6.521	6.859	6.965	6.548	100-110	5.869	1958	98.1,98.1
120	7.186	6.932	6.929	7.326	7.803	8.144	8.267	7.899	110-120	6.847	1965	98.4,98.4
130	8.562	8.279	8.242	8.601	9.033	9.292	9.374	9.096	120-130	7.336	1972	98.8,98.8
140	9.817	9.558	9.522	9.844	10.22	10.41	10.45	10.23	130-140	7.280	1979	99.2,99.2
150	11.01	10.77	10.71	10.96	11.26	11.37	11.38	11.25	140-150	6.613	1986	99.5,99.5
160	12.17	11.96	11.89	12.07	12.28	12.27	12.21	12.19	150-160	5.362	1991	99.8,99.8
170	13.16	13.01	12.95	13.04	13.14	13.05	12.97	13.02	160-170	3.556	1995	99.9,99.9
180	13.60	13.44	13.38	13.49	13.60	13.49	13.38	13.44	170-180	1.265	1996	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

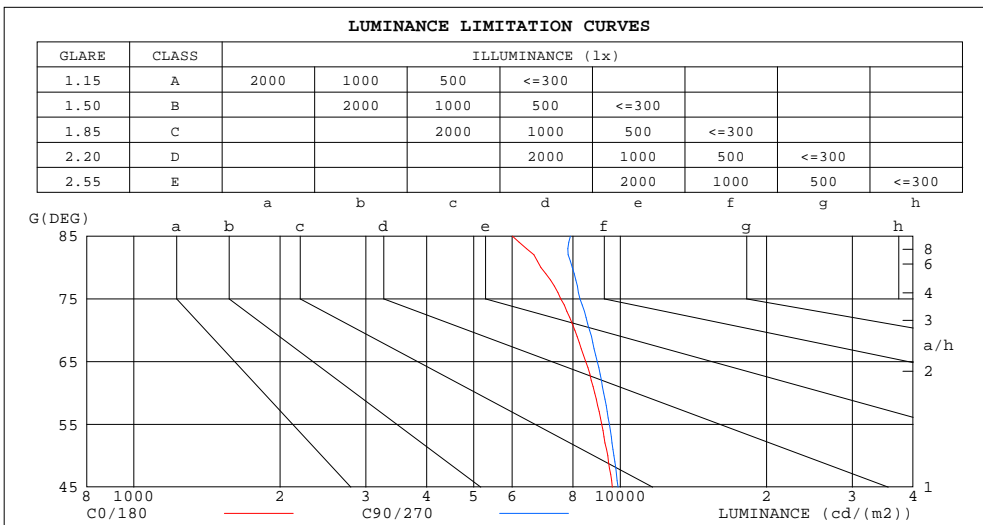

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6001	7898
80	6874	7975
75	7550	8272
70	8065	8657
65	8501	8979
60	8870	9250
55	9161	9500
50	9434	9714
45	9638	9902


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.60	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.36	.30	.26	.35	.30	.25	.24

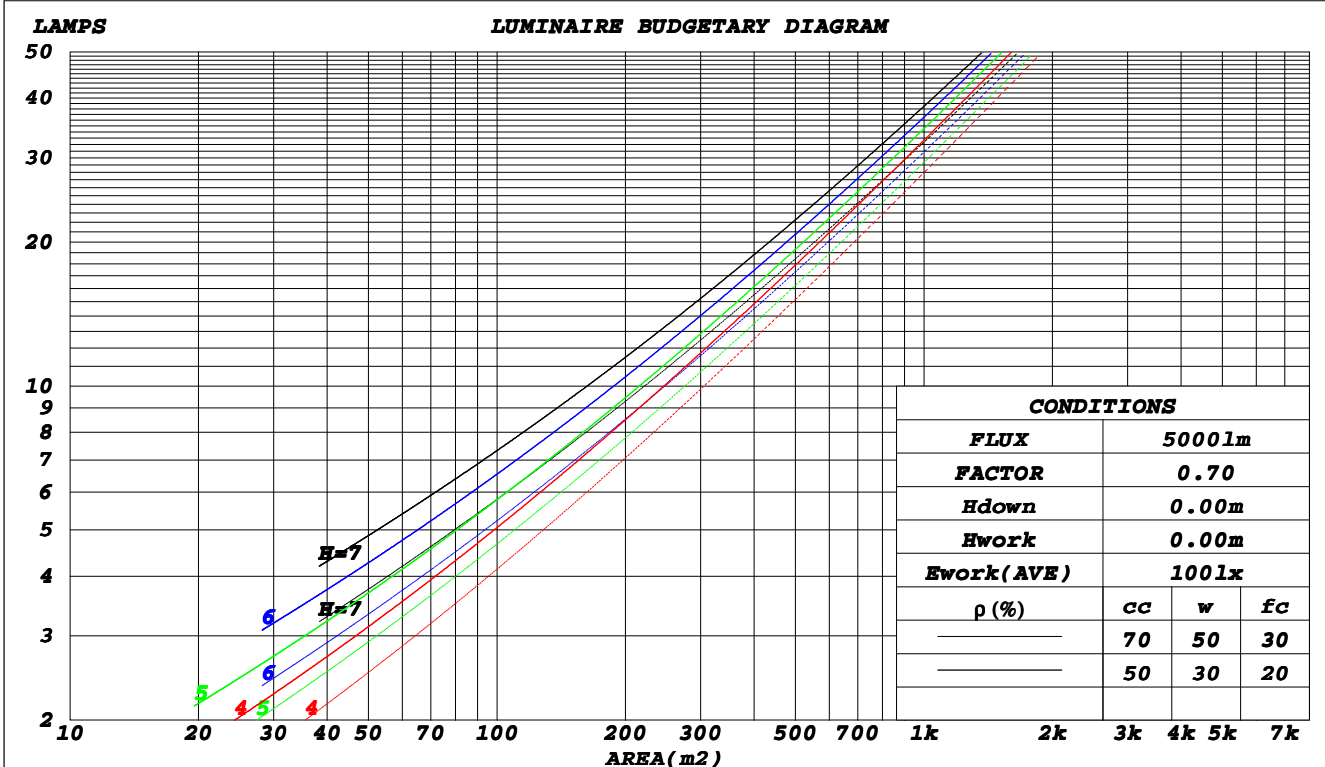

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.174	.055	.290	.166	.053	.276	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.272	.151	.047	.260	.146	.046	.249	.141	.044	
3.0	.269	.143	.043	.263	.141	.042	.252	.136	.041	.241	.132	.041	.231	.128	.040	
4.0	.248	.129	.038	.243	.127	.038	.233	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.225	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.213	.107	.031	.208	.105	.030	.200	.103	.030	.192	.100	.029	.185	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.168	.085	.025	.163	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.199	.175	.153	.171	.150	.132	.117	.103	.091	.067	.060	.053	.022	.019	.017	
2.0	.191	.151	.117	.164	.130	.101	.112	.090	.071	.065	.052	.041	.021	.017	.013	
3.0	.183	.133	.093	.157	.115	.081	.108	.080	.057	.062	.047	.033	.020	.015	.011	
4.0	.176	.120	.078	.151	.104	.067	.104	.072	.047	.060	.042	.028	.019	.014	.009	
5.0	.168	.110	.066	.145	.095	.058	.100	.066	.041	.058	.039	.024	.019	.013	.008	
6.0	.161	.101	.059	.139	.088	.051	.096	.061	.036	.055	.036	.021	.018	.012	.007	
7.0	.154	.095	.053	.133	.082	.046	.092	.057	.032	.053	.034	.019	.017	.011	.006	
8.0	.148	.089	.048	.127	.077	.042	.088	.054	.030	.051	.032	.018	.017	.010	.006	
9.0	.142	.084	.045	.122	.073	.039	.085	.051	.028	.049	.030	.016	.016	.010	.005	
10.0	.136	.080	.042	.117	.069	.037	.081	.049	.026	.048	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.4	21.9	20.7	22.1	22.4	20.6	22.0	20.9	22.3	22.5
3H	21.9	23.3	22.2	23.5	23.8	22.1	23.5	22.5	23.8	24.1
4H	22.5	23.8	22.8	24.1	24.4	22.8	24.1	23.1	24.4	24.7
6H	22.9	24.2	23.3	24.5	24.8	23.3	24.5	23.7	24.8	25.2
8H	23.1	24.3	23.5	24.6	24.9	23.5	24.7	23.9	25.0	25.3
12H	23.2	24.3	23.6	24.7	25.0	23.6	24.8	24.0	25.1	25.5
4H 2H	21.0	22.3	21.4	22.6	22.9	21.1	22.4	21.5	22.7	23.1
3H	22.7	23.9	23.1	24.2	24.5	22.9	24.0	23.3	24.4	24.7
4H	23.4	24.5	23.9	24.9	25.2	23.7	24.7	24.1	25.1	25.5
6H	24.0	24.9	24.5	25.3	25.8	24.3	25.3	24.8	25.7	26.1
8H	24.2	25.1	24.7	25.5	25.9	24.6	25.5	25.0	25.9	26.3
12H	24.4	25.2	24.8	25.6	26.0	24.8	25.6	25.3	26.0	26.5
8H 4H	23.7	24.6	24.2	25.0	25.5	24.0	24.8	24.4	25.2	25.7
6H	24.5	25.2	25.0	25.7	26.1	24.8	25.5	25.3	25.9	26.4
8H	24.8	25.4	25.3	25.9	26.4	25.1	25.8	25.6	26.2	26.7
12H	25.0	25.6	25.5	26.0	26.6	25.4	26.0	25.9	26.5	27.0
12H 4H	23.8	24.6	24.2	25.0	25.4	24.0	24.8	24.4	25.2	25.7
6H	24.6	25.2	25.1	25.7	26.2	24.8	25.5	25.3	26.0	26.5
8H	24.9	25.5	25.4	25.9	26.5	25.2	25.8	25.8	26.3	26.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1996 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.4$)
 Area: 0.065 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	71	65	56	48
1.25	82	72	65	81	71	64	78	69	63	55
1.50	87	77	70	85	76	70	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

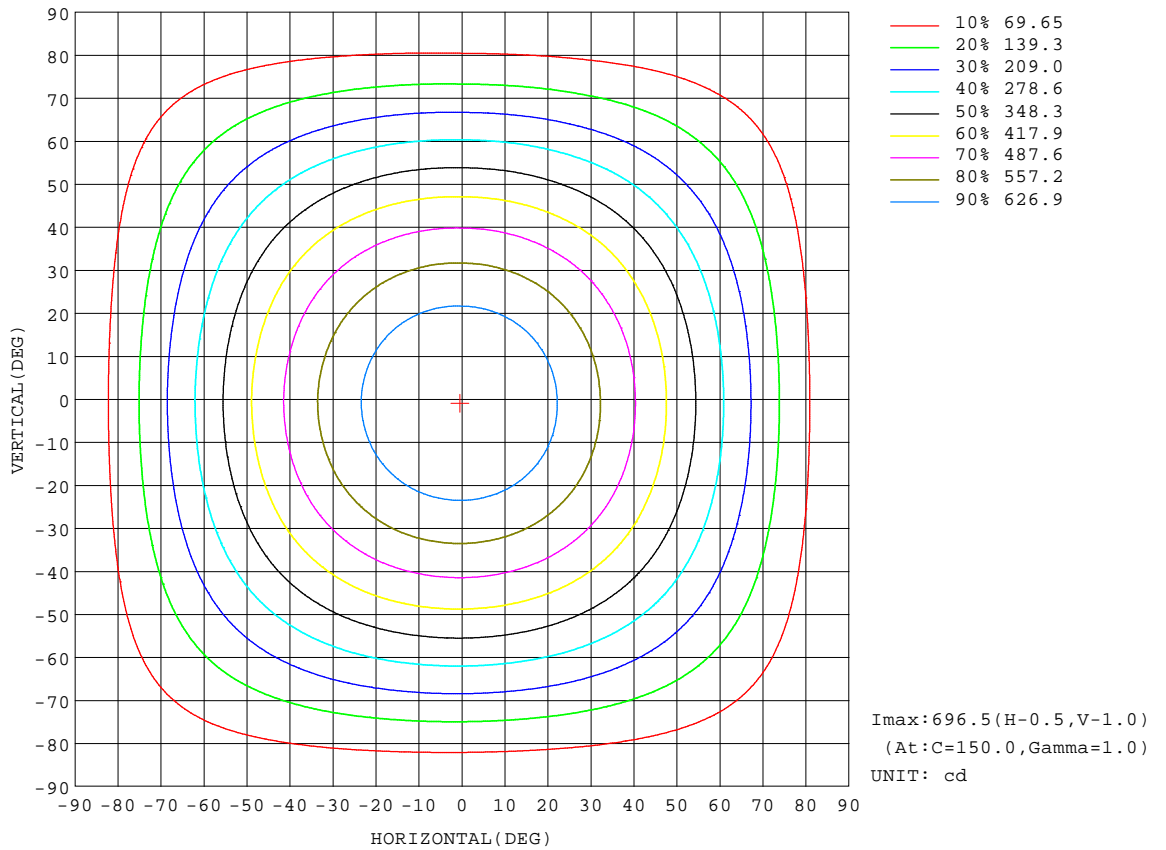


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

Flux out:1380 lm

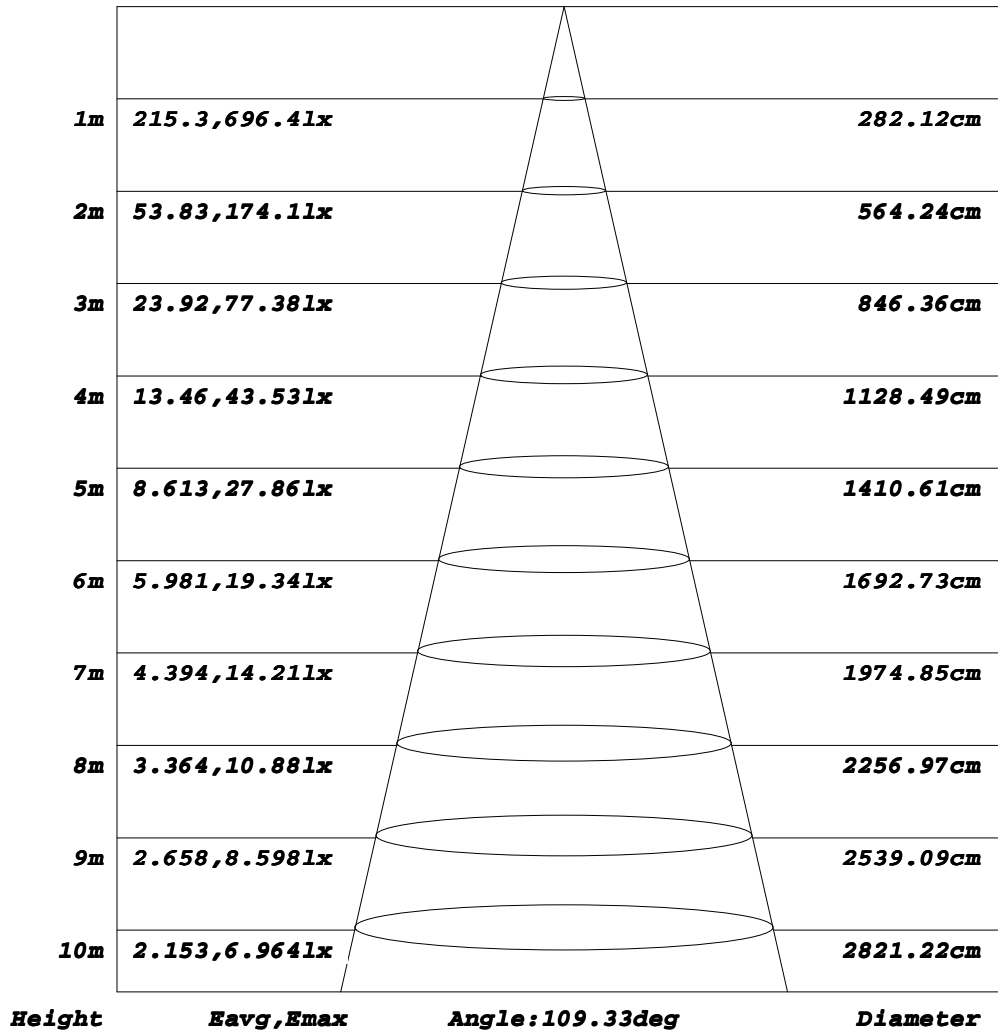


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz		
Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

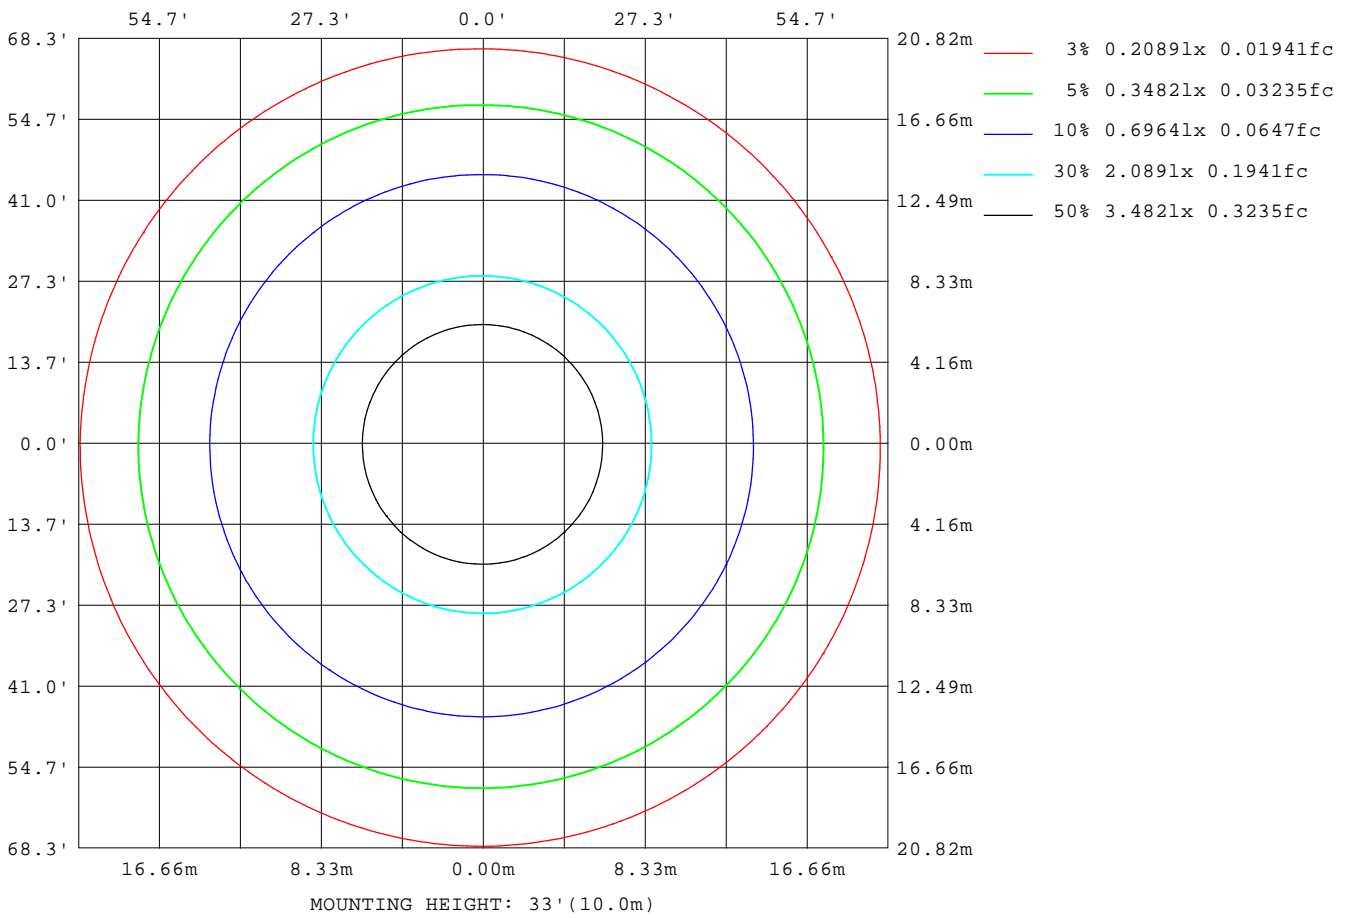

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

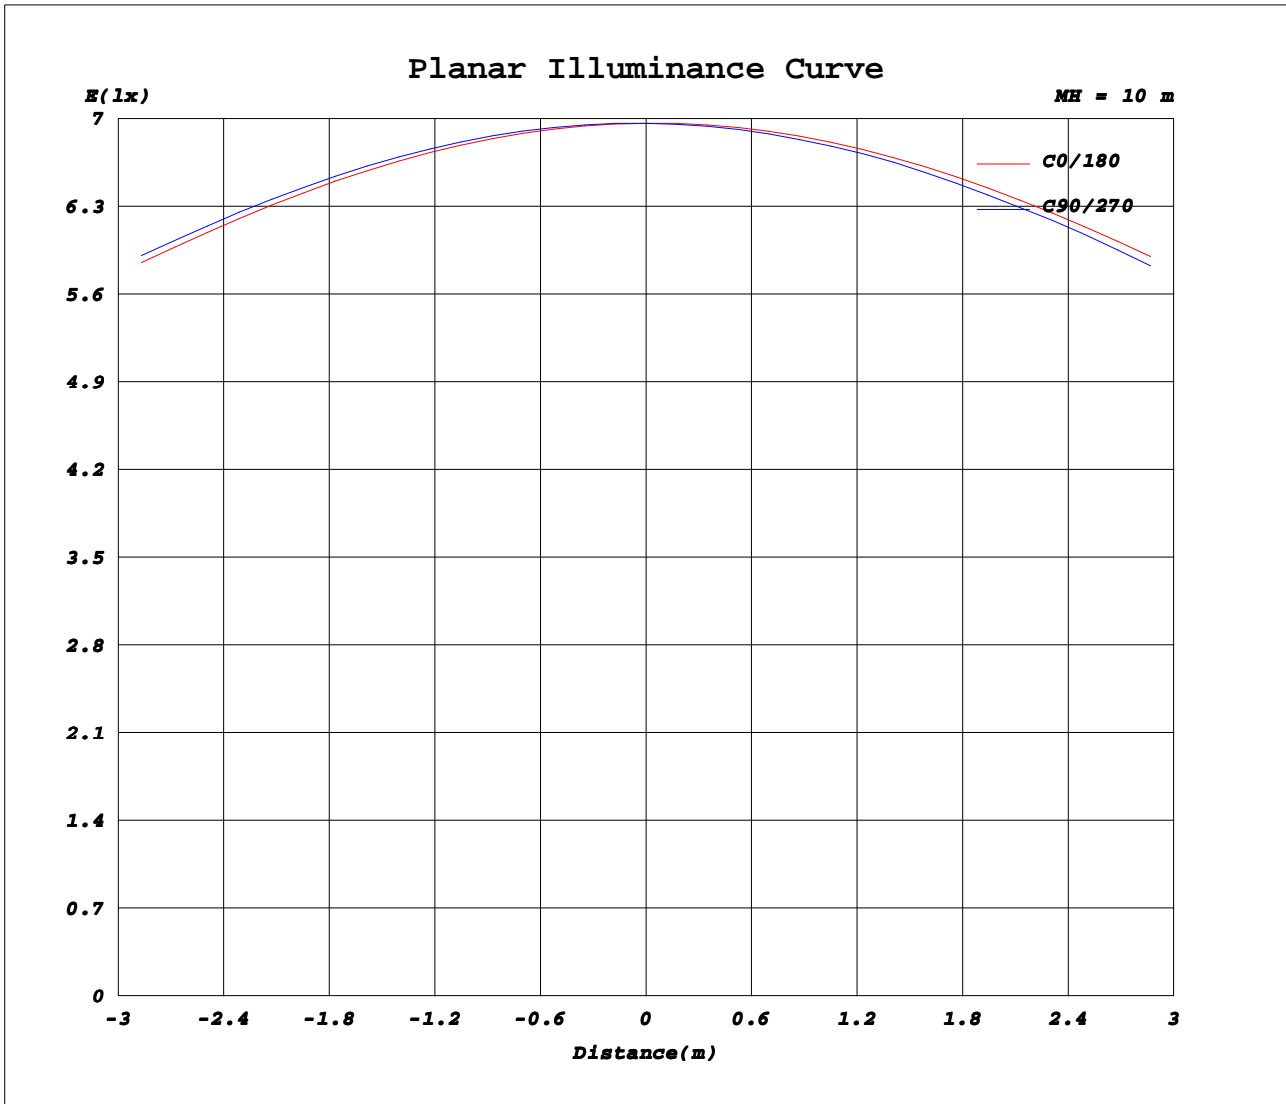

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.0730A P:15.500W PF:0.9510 Freq:50.00Hz Lamp Flux:1996.06x1 lm		
Name: NS40-φ300MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

Table--1

UNIT: cd

C(DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	696	696	696	696	696	696	696	696	696	696	696	696							
5	692	693	694	694	694	694	694	693	692	691	691	691							
10	681	683	684	685	685	685	684	683	681	679	679	679							
15	663	666	668	669	669	669	668	666	663	661	660	661							
20	639	642	645	646	647	647	646	642	639	636	636	637							
25	609	613	616	618	619	619	617	613	609	606	605	606							
30	574	578	582	584	585	585	584	579	574	570	569	571							
35	534	539	543	546	548	548	546	541	535	529	529	530							
40	491	495	499	501	503	503	501	496	490	485	485	487							
45	443	448	452	455	457	457	455	449	443	438	437	439							
50	394	399	403	406	408	409	407	401	394	388	387	389							
55	342	347	351	354	356	356	354	348	341	335	335	337							
60	288	294	298	301	302	303	301	294	287	281	281	283							
65	234	239	244	247	249	249	247	240	233	227	226	228							
70	179	185	189	192	194	195	193	186	179	173	173	175							
75	127	132	136	139	141	142	140	134	127	121	121	122							
80	77.6	83.0	87.2	90.0	91.8	92.1	90.6	84.9	78.6	73.2	72.3	73.7							
85	34.0	38.7	42.3	44.7	46.2	46.4	45.0	40.3	35.2	30.8	29.9	31.0							
90	3.25	4.97	6.23	7.03	7.27	7.12	6.68	5.98	5.17	4.38	3.87	3.49							
95	3.78	3.53	3.45	3.53	3.90	4.34	4.75	4.93	4.98	4.89	4.66	4.29							
100	4.40	4.16	4.08	4.16	4.50	4.91	5.30	5.50	5.57	5.52	5.29	4.92							
105	5.12	4.91	4.83	4.89	5.19	5.55	5.91	6.13	6.25	6.24	6.03	5.66							
110	5.77	5.61	5.56	5.63	5.88	6.20	6.52	6.78	6.94	6.96	6.75	6.35							
115	6.46	6.29	6.23	6.29	6.53	6.83	7.14	7.41	7.59	7.63	7.42	7.03							
120	7.19	6.97	6.89	6.93	7.17	7.48	7.80	8.06	8.23	8.27	8.08	7.72							
125	7.89	7.66	7.55	7.57	7.81	8.12	8.44	8.65	8.79	8.81	8.65	8.34							
130	8.56	8.33	8.23	8.24	8.46	8.74	9.03	9.23	9.35	9.37	9.23	8.96							
135	9.21	8.98	8.88	8.89	9.10	9.36	9.63	9.80	9.91	9.92	9.79	9.56							
140	9.82	9.61	9.51	9.52	9.72	9.97	10.2	10.4	10.5	10.5	10.3	10.1							
145	10.4	10.2	10.1	10.1	10.3	10.5	10.7	10.9	10.9	10.9	10.8	10.7							
150	11.0	10.8	10.7	10.7	10.9	11.1	11.3	11.4	11.4	11.4	11.3	11.2							
155	11.6	11.4	11.3	11.3	11.4	11.6	11.8	11.8	11.8	11.8	11.8	11.7							
160	12.2	12.0	11.9	11.9	12.0	12.1	12.3	12.3	12.3	12.2	12.2	12.2							
165	12.7	12.5	12.5	12.4	12.5	12.6	12.7	12.7	12.7	12.6	12.6	12.6							
170	13.2	13.0	13.0	12.9	13.0	13.1	13.1	13.1	13.0	13.0	13.0	13.1							
175	13.5	13.4	13.3	13.3	13.3	13.4	13.5	13.4	13.3	13.3	13.3	13.4							
180	13.6	13.5	13.4	13.4	13.4	13.5	13.6	13.5	13.4	13.4	13.4	13.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: