
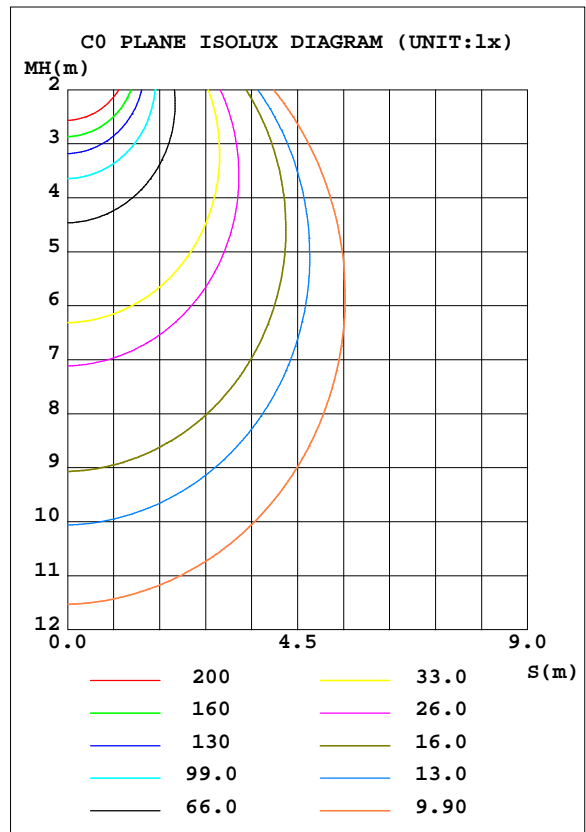


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.15 lm/W			
MODEL		I _{max} (cd)	1317	S/MH(C0/180)	1.22
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3834.8	η UP, DN(C0-180)	1.1, 47.8
NOMINAL FLUX(lm)	3834.82	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2, 49.9
LAMPS INSIDE	1	η up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	97.7	CIBSE SHR MAX	1.35

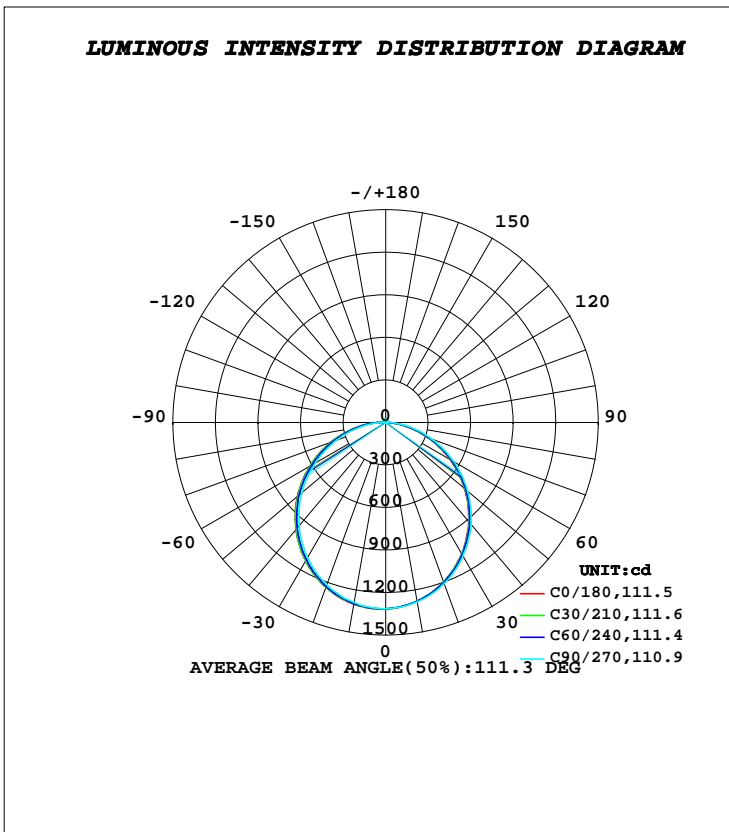

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1280	1280	1285	1291	1301	1297	1289	1283	0- 10	124.2	124.2	3.24,3.24
20	1196	1199	1209	1220	1238	1233	1217	1205	10- 20	354.7	478.9	12.5,12.5
30	1070	1077	1090	1106	1130	1123	1102	1084	20- 30	534.9	1014	26.4,26.4
40	911.3	920.0	937.1	955.9	985.1	976.1	949.2	928.5	30- 40	641.3	1655	43.2,43.2
50	727.3	736.7	755.3	778.4	814.8	802.7	770.4	747.8	40- 50	662.1	2317	60.4,60.4
60	525.1	535.8	557.6	582.8	618.7	606.5	573.1	546.9	50- 60	597.8	2915	76,76
70	319.2	330.0	350.1	375.4	413.6	402.1	368.7	340.7	60- 70	460.3	3375	88,88
80	126.2	137.4	157.2	177.9	214.2	203.0	171.8	148.0	70- 80	277.2	3653	95.2,95.2
90	6.972	8.296	8.590	19.06	43.60	38.50	21.56	10.07	80- 90	92.57	3745	97.7,97.7
100	9.098	8.556	8.233	8.218	10.09	10.07	10.25	10.53	90-100	10.78	3756	97.9,97.9
110	11.29	10.81	10.53	10.23	12.19	12.16	12.36	12.63	100-110	11.02	3767	98.2,98.2
120	13.44	13.01	12.76	12.42	14.23	14.18	14.44	14.69	110-120	12.46	3779	98.6,98.6
130	15.50	15.15	14.92	14.60	16.19	16.18	16.39	16.67	120-130	13.14	3793	98.9,98.9
140	17.36	17.08	16.90	16.62	18.11	18.05	18.21	18.46	130-140	12.87	3805	99.2,99.2
150	19.30	19.01	18.87	18.63	19.80	19.72	19.86	20.03	140-150	11.59	3817	99.5,99.5
160	21.34	21.03	21.04	20.77	21.51	21.37	21.54	21.55	150-160	9.373	3826	99.8,99.8
170	23.00	22.76	22.90	22.56	22.97	22.76	22.98	22.87	160-170	6.239	3833	99.9,99.9
180	23.56	23.37	23.54	23.30	23.58	23.37	23.53	23.30	170-180	2.205	3835	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

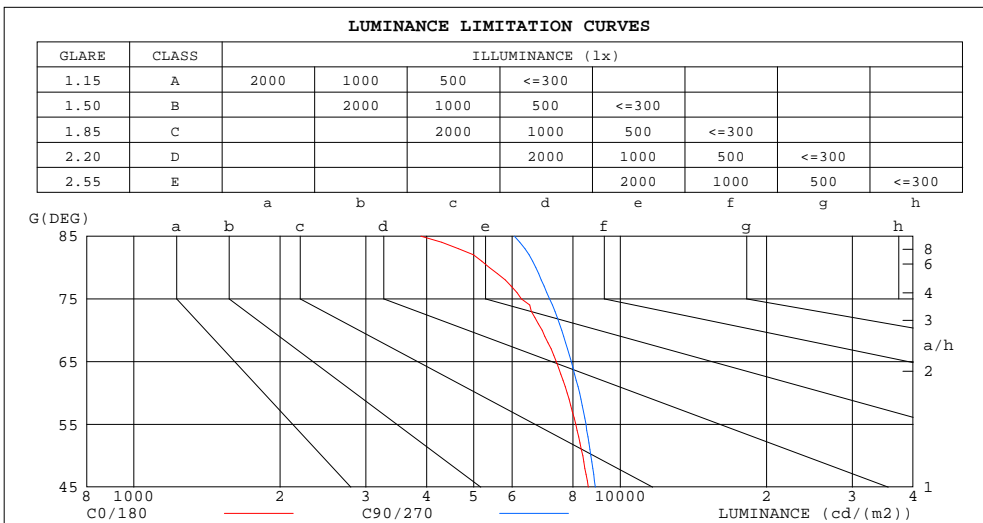


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.00	.96	.93	.96	.92	.89	.91	.89	.86	.87	.85	.83	.81
2.0	.90	.83	.77	.87	.81	.76	.84	.78	.74	.80	.75	.72	.77	.73	.70	.67
3.0	.79	.70	.64	.77	.69	.63	.73	.67	.62	.70	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

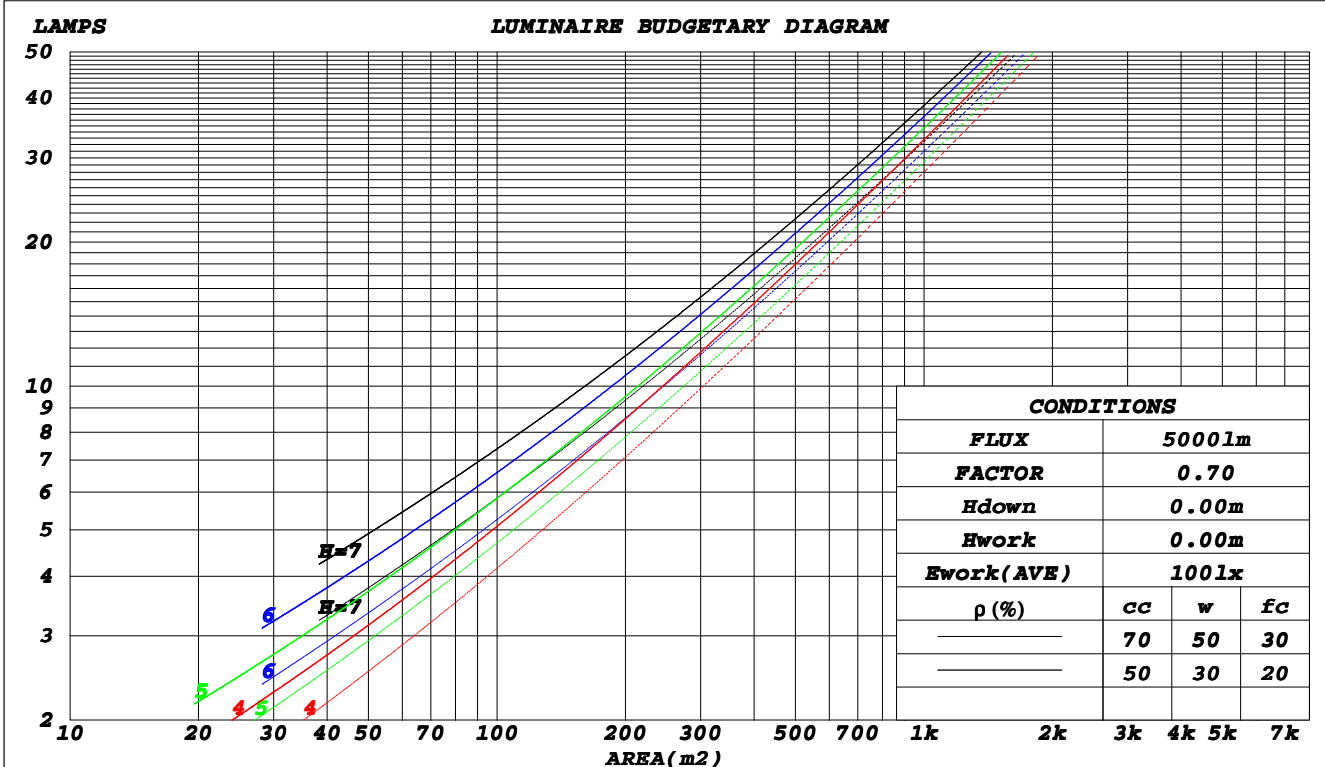

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.316	.180	.057	.308	.176	.056	.294	.169	.054	.280	.162	.052	.268	.155	.050	
2.0	.295	.162	.050	.288	.159	.049	.275	.153	.047	.263	.147	.046	.252	.142	.045	
3.0	.272	.145	.043	.265	.142	.043	.254	.138	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.245	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.186	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.186	.091	.025	.182	.090	.025	.175	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.199	.174	.152	.170	.149	.131	.116	.103	.090	.067	.059	.053	.021	.019	.017	
2.0	.191	.150	.116	.163	.129	.100	.112	.089	.070	.065	.052	.041	.021	.017	.013	
3.0	.183	.132	.092	.157	.114	.080	.108	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.119	.076	.150	.103	.066	.103	.072	.047	.060	.042	.028	.019	.014	.009	
5.0	.168	.109	.065	.144	.094	.057	.099	.066	.040	.058	.039	.024	.019	.013	.008	
6.0	.161	.101	.058	.138	.087	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.154	.094	.052	.132	.081	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
8.0	.147	.088	.047	.127	.076	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
9.0	.141	.083	.044	.122	.072	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
10.0	.136	.079	.041	.117	.068	.036	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.8	21.3	20.1	21.5	21.8	20.0	21.5	20.3	21.7	22.0
3H	21.2	22.6	21.5	22.9	23.2	21.5	22.9	21.8	23.1	23.4
4H	21.8	23.1	22.1	23.4	23.7	22.1	23.4	22.5	23.7	24.0
6H	22.1	23.4	22.5	23.7	24.0	22.6	23.8	23.0	24.1	24.5
8H	22.2	23.4	22.6	23.8	24.1	22.8	23.9	23.1	24.3	24.6
12H	22.3	23.4	22.7	23.8	24.1	22.9	24.0	23.2	24.3	24.7
4H 2H	20.4	21.7	20.7	22.0	22.3	20.5	21.8	20.9	22.1	22.4
3H	22.0	23.1	22.4	23.5	23.8	22.2	23.4	22.6	23.7	24.1
4H	22.7	23.7	23.1	24.1	24.5	23.0	24.0	23.4	24.4	24.8
6H	23.2	24.1	23.6	24.5	24.9	23.6	24.5	24.0	24.9	25.3
8H	23.3	24.2	23.8	24.6	25.0	23.8	24.7	24.2	25.1	25.5
12H	23.4	24.2	23.8	24.6	25.1	23.9	24.7	24.4	25.2	25.6
8H 4H	22.9	23.8	23.4	24.2	24.6	23.2	24.1	23.6	24.5	24.9
6H	23.6	24.3	24.0	24.7	25.2	23.9	24.7	24.4	25.1	25.6
8H	23.8	24.4	24.3	24.9	25.4	24.2	24.9	24.7	25.3	25.8
12H	23.9	24.5	24.4	25.0	25.5	24.5	25.0	25.0	25.5	26.0
12H 4H	22.9	23.7	23.4	24.2	24.6	23.2	24.0	23.7	24.4	24.9
6H	23.6	24.3	24.1	24.7	25.2	24.0	24.6	24.5	25.1	25.6
8H	23.9	24.4	24.4	24.9	25.5	24.3	24.9	24.8	25.4	25.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 3835 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
 Area: 0.135 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	47	65	54	47	64	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	70	64	77	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	78	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	91	85	80	72
3.00	101	94	88	99	92	87	94	89	85	76
4.00	105	99	95	103	97	93	98	94	90	80
5.00	108	103	99	105	101	97	100	97	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

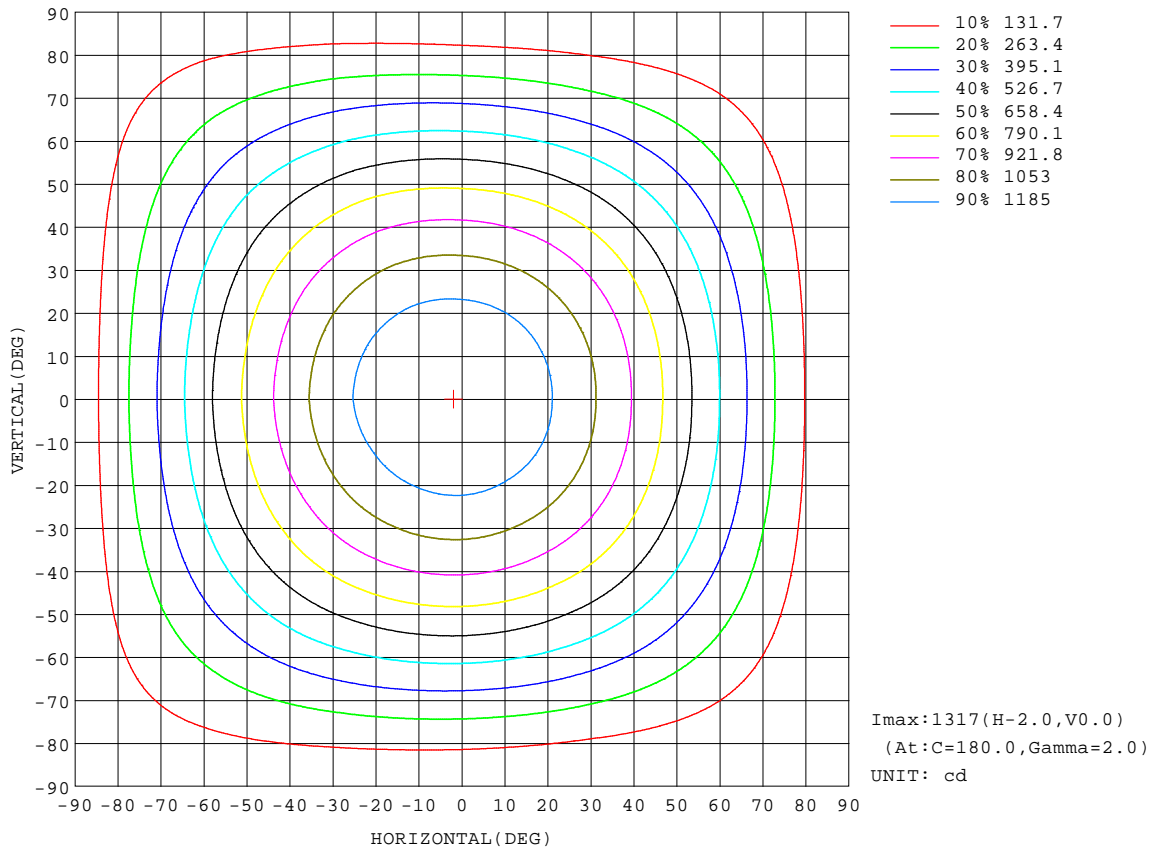


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

Flux out:2689 lm

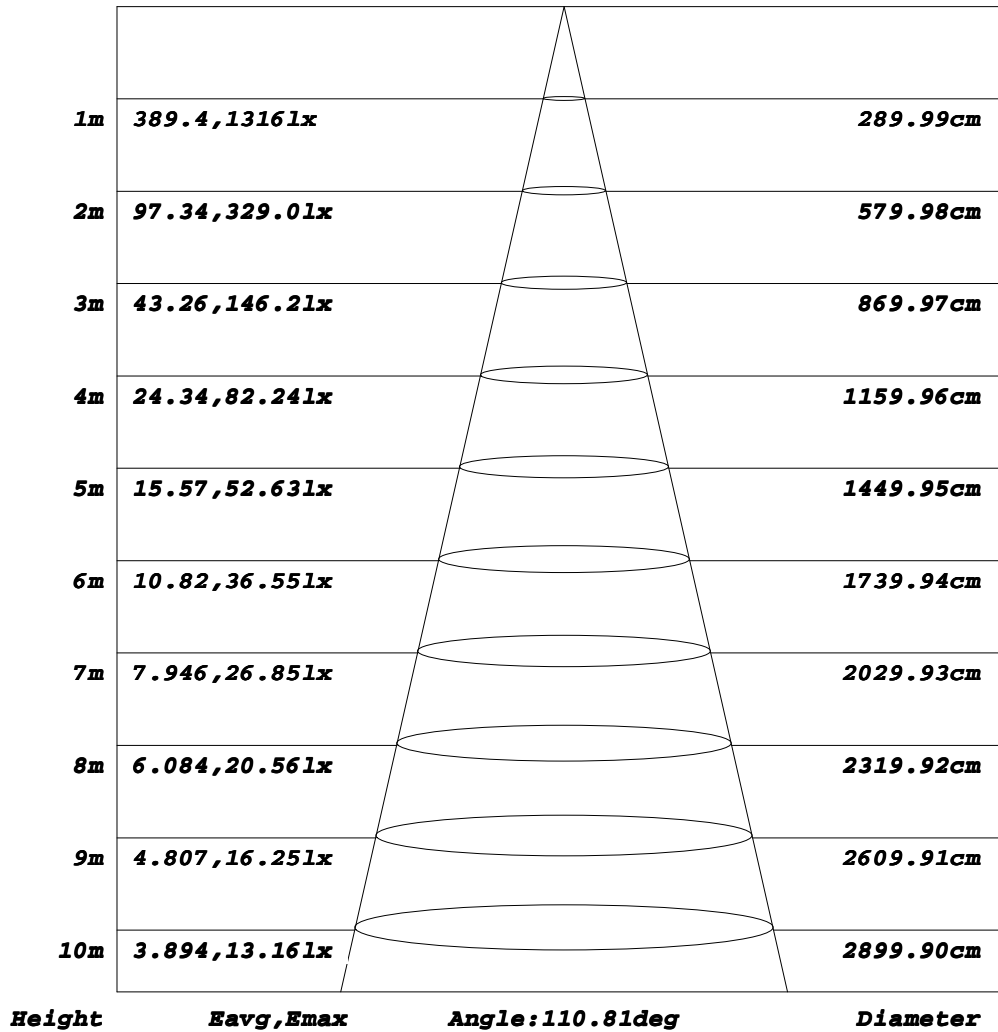


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

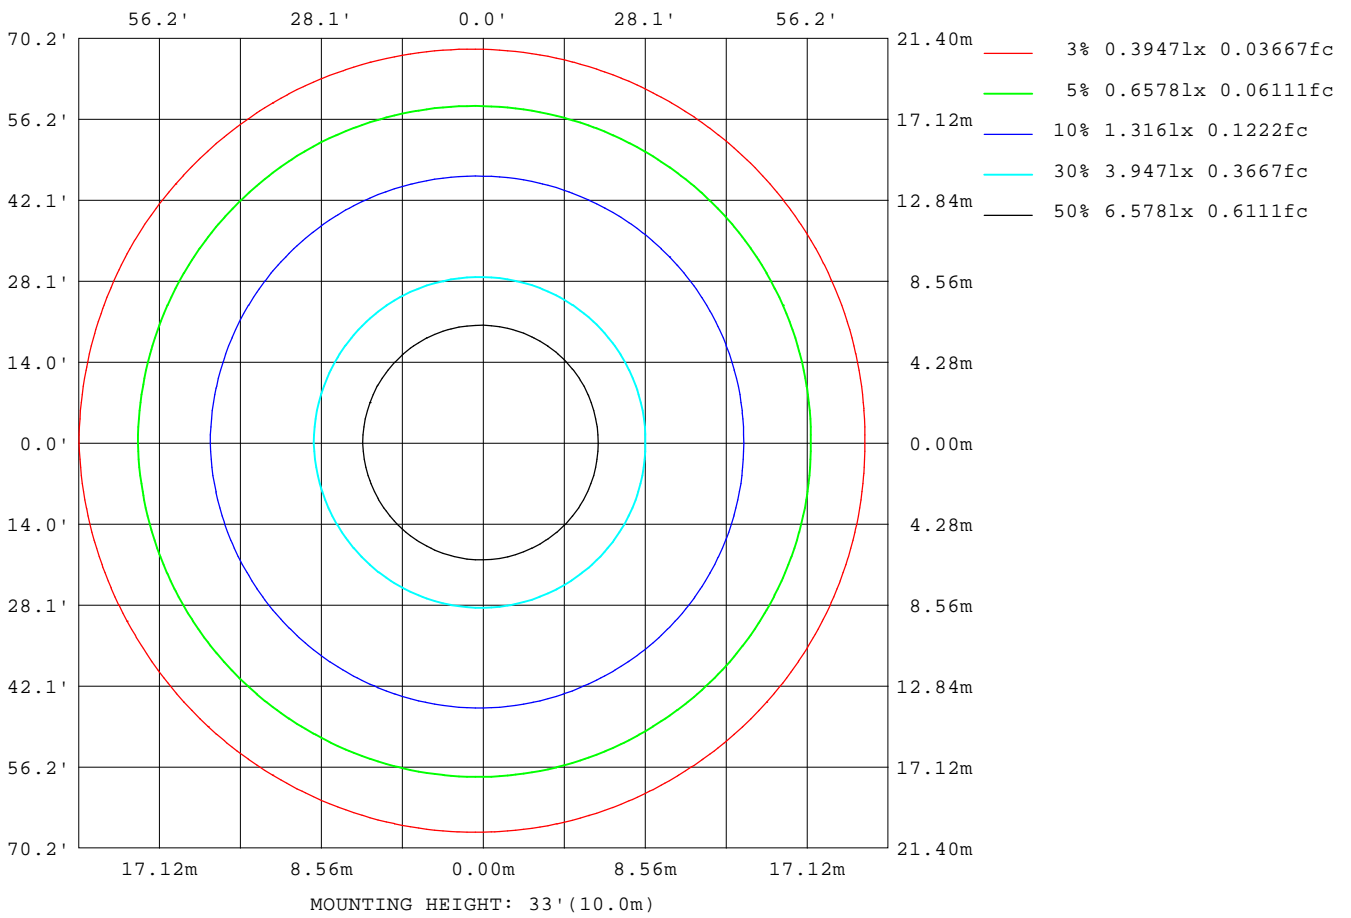

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

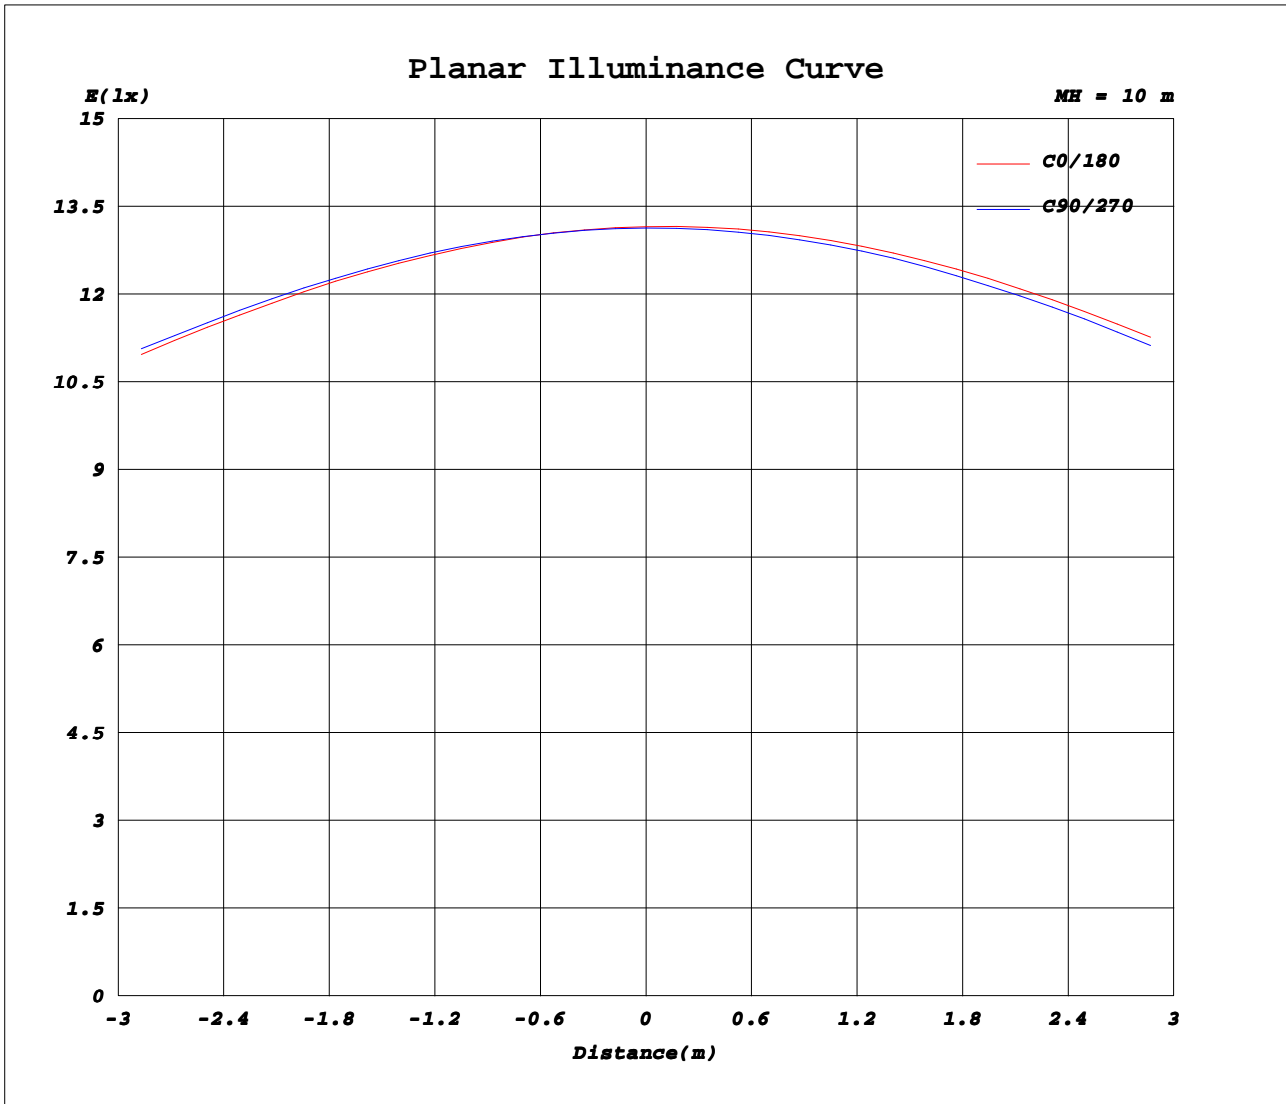

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1420A P:30.400W PF:0.9610 Freq:50.00Hz Lamp Flux:3834.82x1 lm		
Name: NS40-φ435MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D435*H100mm	
	SUR.: D415mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1316	1314	1313	1313	1313	1312	1316	1314	1313	1313	1313	1312							
5	1304	1303	1303	1305	1307	1309	1315	1313	1311	1308	1306	1302							
10	1280	1280	1281	1285	1289	1292	1301	1298	1296	1289	1286	1279							
15	1244	1245	1247	1253	1258	1264	1275	1273	1269	1260	1254	1246							
20	1196	1198	1201	1209	1216	1224	1238	1235	1230	1217	1210	1200							
25	1138	1141	1145	1155	1163	1173	1189	1187	1179	1165	1155	1145							
30	1070	1074	1079	1090	1099	1112	1130	1128	1118	1102	1089	1079							
35	995	999	1005	1017	1027	1042	1061	1059	1048	1029	1015	1004							
40	911	917	923	937	948	964	985	982	970	949	935	922							
45	821	828	833	849	860	878	902	898	886	862	848	834							
50	727	733	741	755	769	788	815	808	798	770	756	740							
55	628	635	642	658	671	691	718	713	699	673	656	641							
60	525	532	540	558	571	595	619	613	600	573	555	539							
65	422	428	437	453	468	487	517	513	498	472	451	437							
70	319	326	334	350	365	386	414	410	395	369	347	334							
75	219	226	234	250	264	284	312	308	294	268	247	234							
80	126	135	139	157	168	188	214	209	197	172	153	143							
85	45.8	50.2	56.0	71.3	83.5	100	124	121	107	85.5	73.5	61.7							
90	6.97	8.07	8.52	8.59	13.2	25.0	43.6	41.6	35.4	21.6	11.4	8.75							
95	8.01	8.14	7.39	7.14	7.87	8.02	9.13	9.09	9.11	9.24	9.42	9.66							
100	9.10	8.64	8.48	8.23	8.03	8.41	10.1	10.1	10.1	10.3	10.4	10.7							
105	10.2	9.76	9.62	9.38	9.16	9.03	11.1	11.1	11.1	11.3	11.5	11.7							
110	11.3	10.9	10.7	10.5	10.3	10.2	12.2	12.1	12.2	12.4	12.5	12.7							
115	12.4	12.0	11.8	11.6	11.4	11.3	13.2	13.1	13.2	13.4	13.5	13.8							
120	13.4	13.1	13.0	12.8	12.5	12.3	14.2	14.2	14.2	14.4	14.6	14.8							
125	14.5	14.2	14.0	13.9	13.6	13.4	15.2	15.2	15.2	15.4	15.6	15.8							
130	15.5	15.2	15.1	14.9	14.7	14.5	16.2	16.2	16.2	16.4	16.5	16.8							
135	16.4	16.2	16.1	15.9	15.7	15.6	17.2	17.1	17.2	17.3	17.5	17.7							
140	17.4	17.2	17.0	16.9	16.7	16.5	18.1	18.0	18.1	18.2	18.4	18.6							
145	18.3	18.1	17.9	17.8	17.7	17.5	19.0	18.9	18.9	19.0	19.2	19.3							
150	19.3	19.1	18.9	18.9	18.7	18.5	19.8	19.7	19.8	19.9	19.9	20.1							
155	20.3	20.1	19.9	20.0	19.8	19.6	20.7	20.5	20.6	20.7	20.7	20.9							
160	21.3	21.1	21.0	21.0	20.9	20.7	21.5	21.3	21.4	21.5	21.5	21.6							
165	22.3	22.1	21.9	22.1	21.9	21.7	22.3	22.1	22.2	22.4	22.2	22.4							
170	23.0	22.8	22.7	22.9	22.6	22.5	23.0	22.7	22.8	23.0	22.8	22.9							
175	23.5	23.3	23.2	23.4	23.2	23.1	23.4	23.1	23.2	23.3	23.2	23.2							
180	23.6	23.4	23.3	23.5	23.3	23.3	23.6	23.4	23.4	23.5	23.3	23.3							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: