
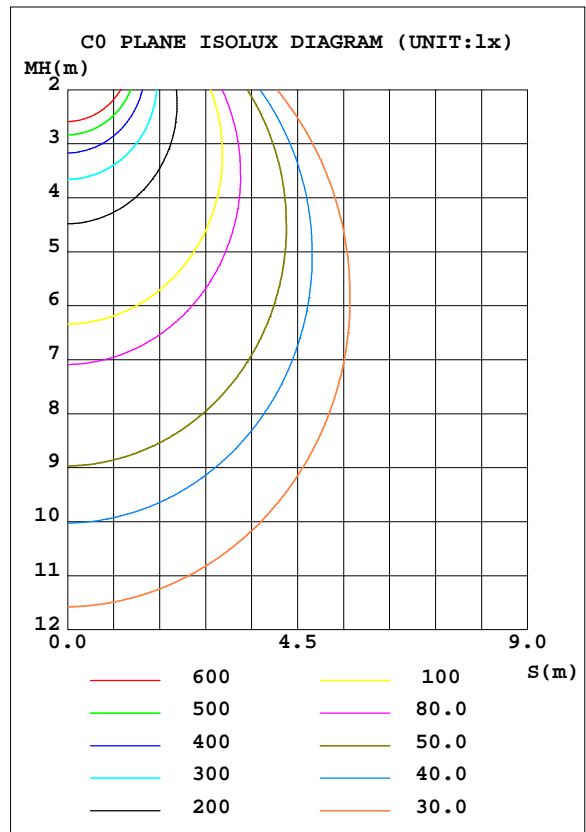


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.61 lm/W			
MODEL		I _{max} (cd)	4021	S/MH(C0/180)	1.24
NOMINAL POWER(W)	90	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	11703	η UP, DN(C0-180)	0.9,48.3
NOMINAL FLUX(lm)	11703.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.0,49.7
LAMPS INSIDE	1	η up(%)	2.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	98.0	CIBSE SHR MAX	1.35

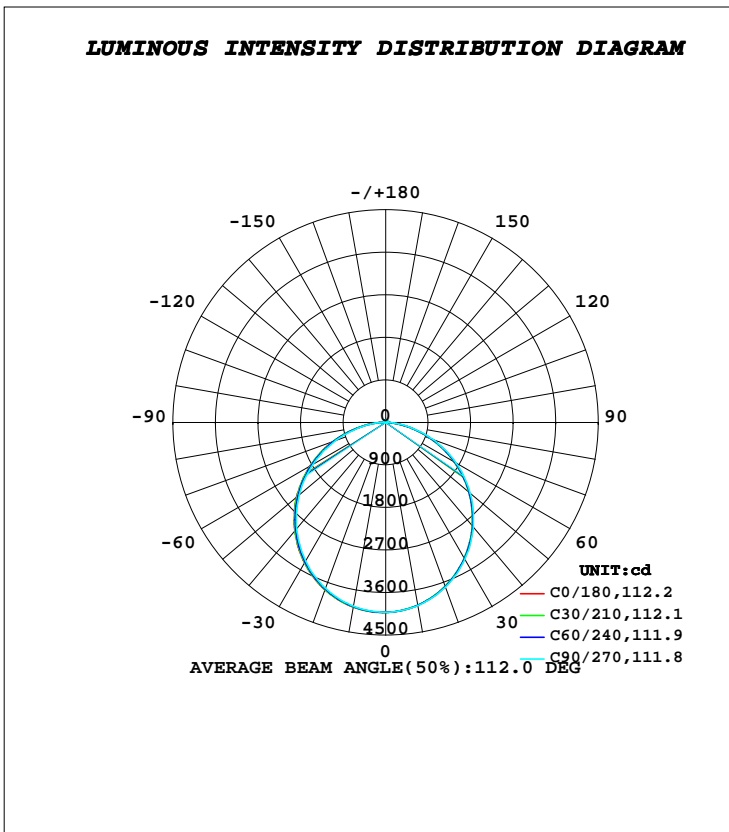

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3924	3926	3933	3951	3966	3959	3946	3935	0- 10	379.9	379.9	3.25,3.25
20	3688	3692	3706	3739	3767	3756	3734	3712	10- 20	1087	1467	12.5,12.5
30	3322	3329	3349	3396	3436	3420	3388	3357	20- 30	1642	3109	26.6,26.6
40	2852	2861	2887	2946	2995	2973	2931	2893	30- 40	1975	5084	43.4,43.4
50	2299	2307	2336	2407	2466	2439	2389	2345	40- 50	2047	7131	60.9,60.9
60	1679	1693	1724	1795	1852	1828	1778	1731	50- 60	1853	8984	76.8,76.8
70	1020	1035	1067	1137	1195	1173	1125	1077	60- 70	1419	10403	88.9,88.9
80	397.8	411.3	439.8	500.4	549.3	528.6	486.0	444.7	70- 80	822.0	11225	95.9,95.9
90	20.54	16.40	22.47	47.88	70.31	61.89	45.40	32.96	80- 90	247.0	11472	98,98
100	26.26	25.15	25.38	27.88	30.51	31.21	30.82	29.08	90-100	29.33	11502	98.3,98.3
110	30.66	29.63	29.88	32.29	34.81	35.45	35.04	33.36	100-110	32.34	11534	98.6,98.6
120	34.05	33.10	33.35	35.62	38.00	38.67	38.35	36.71	110-120	34.07	11568	98.8,98.8
130	37.59	36.63	36.80	38.88	41.09	41.70	41.41	39.96	120-130	33.73	11602	99.1,99.1
140	41.29	40.42	40.54	42.36	44.30	44.81	44.55	43.31	130-140	31.68	11634	99.4,99.4
150	45.47	44.73	44.79	46.20	47.71	48.11	47.92	46.99	140-150	27.95	11661	99.6,99.6
160	49.20	48.62	48.62	49.61	50.68	50.91	50.74	50.15	150-160	22.27	11684	99.8,99.8
170	52.04	51.77	51.76	52.19	52.64	52.70	52.60	52.38	160-170	14.46	11698	100,100
180	52.87	52.80	52.78	52.85	52.91	52.83	52.75	52.78	170-180	5.024	11703	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

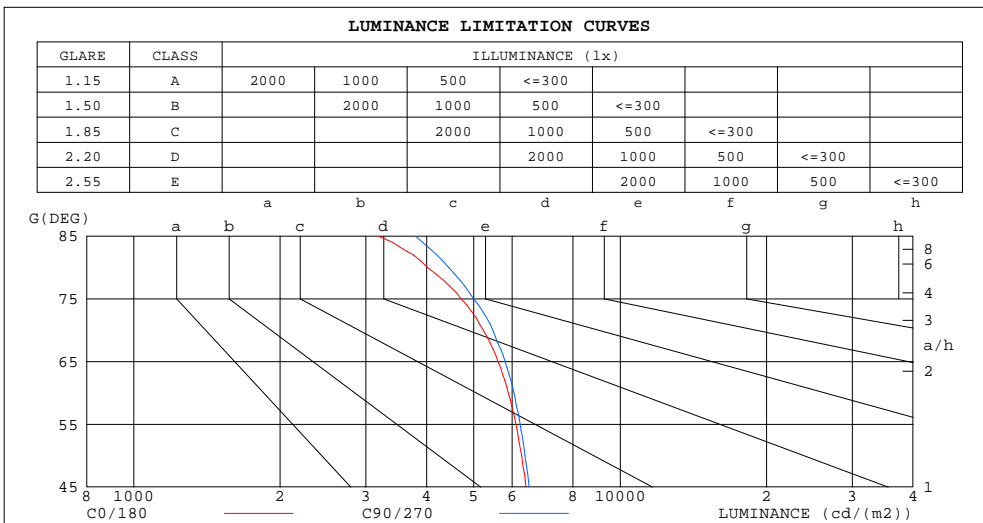

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3184	3792
80	4019	4443
75	4711	4999
70	5234	5472
65	5613	5802
60	5891	6051
55	6105	6231
50	6276	6375
45	6403	6500


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

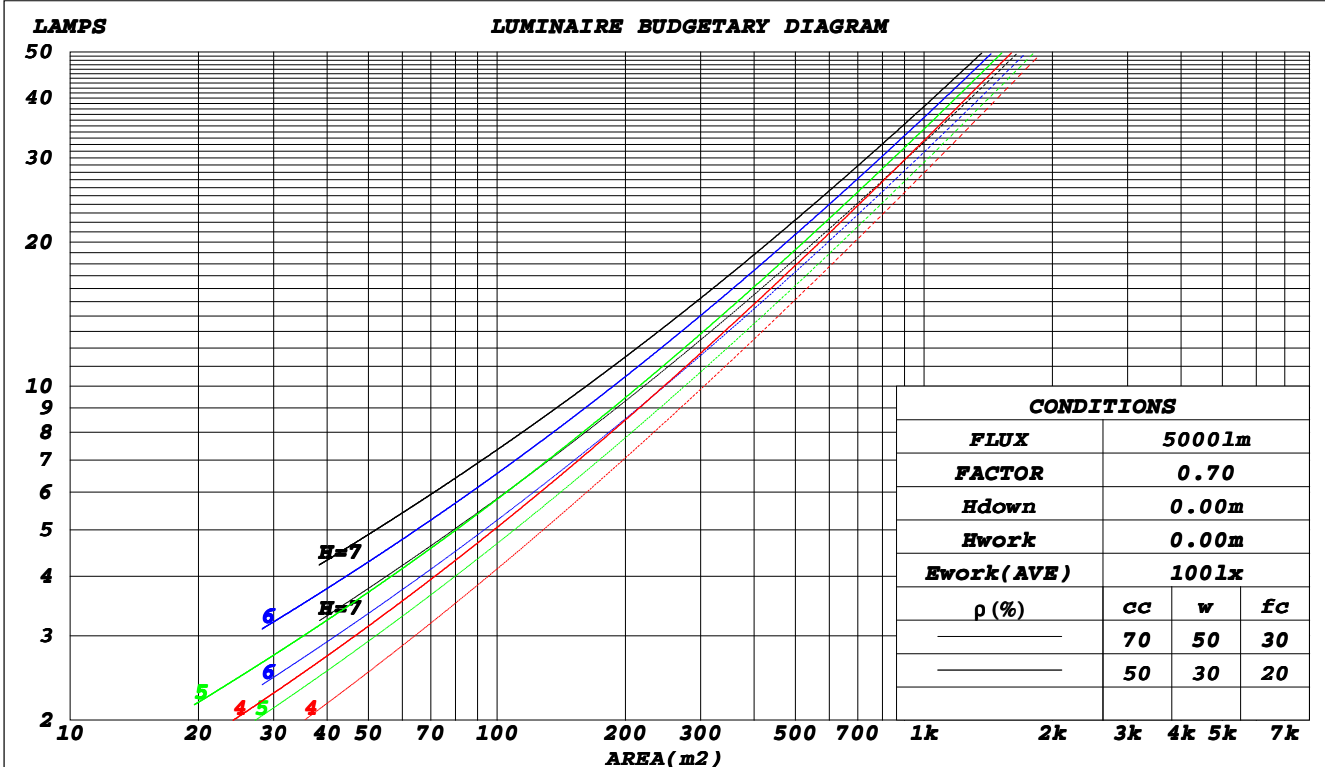

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.178	.056	.305	.174	.055	.290	.167	.053	.277	.160	.051	.265	.154	.049	
2.0	.293	.160	.049	.286	.158	.049	.273	.152	.047	.261	.147	.046	.251	.142	.045	
3.0	.270	.144	.043	.264	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.249	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.171	.149	.167	.147	.129	.114	.101	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.147	.113	.161	.127	.098	.110	.088	.068	.064	.051	.040	.020	.016	.013	
3.0	.180	.130	.090	.154	.112	.078	.106	.078	.054	.061	.045	.032	.020	.015	.011	
4.0	.172	.116	.074	.148	.101	.064	.102	.070	.045	.059	.041	.027	.019	.013	.009	
5.0	.165	.106	.063	.142	.092	.054	.098	.064	.038	.056	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.059	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.049	.130	.079	.043	.090	.055	.030	.052	.033	.018	.017	.011	.006	
8.0	.144	.085	.044	.124	.074	.039	.086	.052	.027	.050	.031	.016	.016	.010	.005	
9.0	.138	.080	.041	.119	.070	.036	.083	.049	.025	.048	.029	.015	.016	.009	.005	
10.0	.133	.076	.038	.114	.066	.033	.079	.046	.024	.046	.027	.014	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	20.4	19.2	20.6	20.9	19.0	20.5	19.3	20.7	21.0
3H	20.4	21.7	20.7	22.0	22.3	20.5	21.9	20.8	22.1	22.4
4H	20.9	22.2	21.2	22.5	22.8	21.1	22.4	21.4	22.7	23.0
6H	21.3	22.5	21.6	22.8	23.1	21.5	22.7	21.8	23.0	23.3
8H	21.4	22.6	21.7	22.9	23.2	21.6	22.8	22.0	23.1	23.4
12H	21.4	22.6	21.8	22.9	23.2	21.7	22.8	22.1	23.2	23.5
4H 2H	19.5	20.8	19.8	21.1	21.4	19.6	20.9	19.9	21.2	21.5
3H	21.1	22.3	21.5	22.6	23.0	21.2	22.4	21.6	22.7	23.1
4H	21.8	22.8	22.2	23.2	23.6	21.9	23.0	22.3	23.3	23.7
6H	22.3	23.2	22.7	23.6	24.0	22.5	23.4	22.9	23.8	24.2
8H	22.4	23.3	22.9	23.7	24.1	22.6	23.5	23.1	23.9	24.3
12H	22.5	23.3	23.0	23.7	24.2	22.7	23.5	23.2	24.0	24.4
8H 4H	22.0	22.9	22.5	23.3	23.7	22.2	23.0	22.6	23.4	23.9
6H	22.6	23.4	23.1	23.8	24.3	22.8	23.5	23.3	24.0	24.5
8H	22.9	23.5	23.4	24.0	24.5	23.1	23.7	23.6	24.2	24.7
12H	23.0	23.6	23.5	24.0	24.6	23.3	23.8	23.8	24.3	24.8
12H 4H	22.0	22.8	22.5	23.3	23.7	22.2	23.0	22.6	23.4	23.8
6H	22.7	23.3	23.2	23.8	24.3	22.9	23.5	23.4	24.0	24.5
8H	22.9	23.5	23.5	24.0	24.5	23.2	23.7	23.7	24.2	24.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 11703 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.5)
 Area: 0.57 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	71	65	56	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	70	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

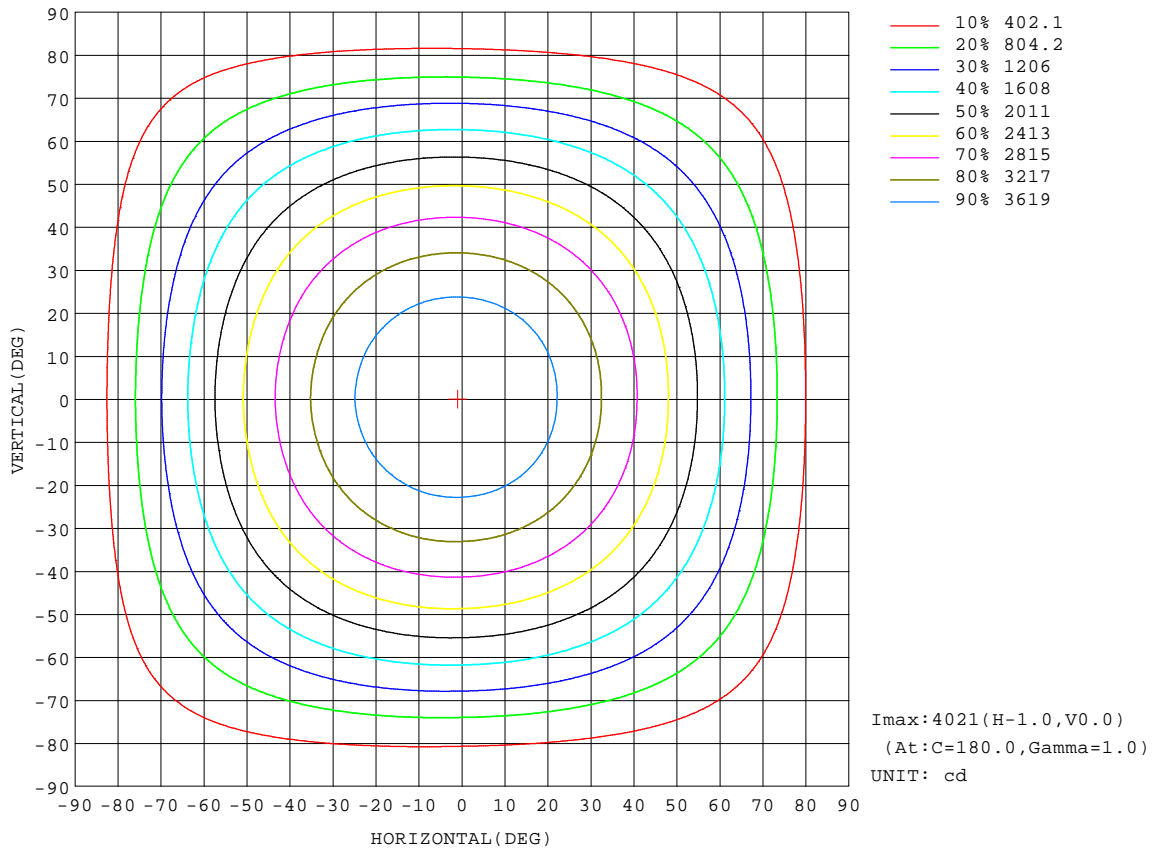


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

Flux out:8283 lm

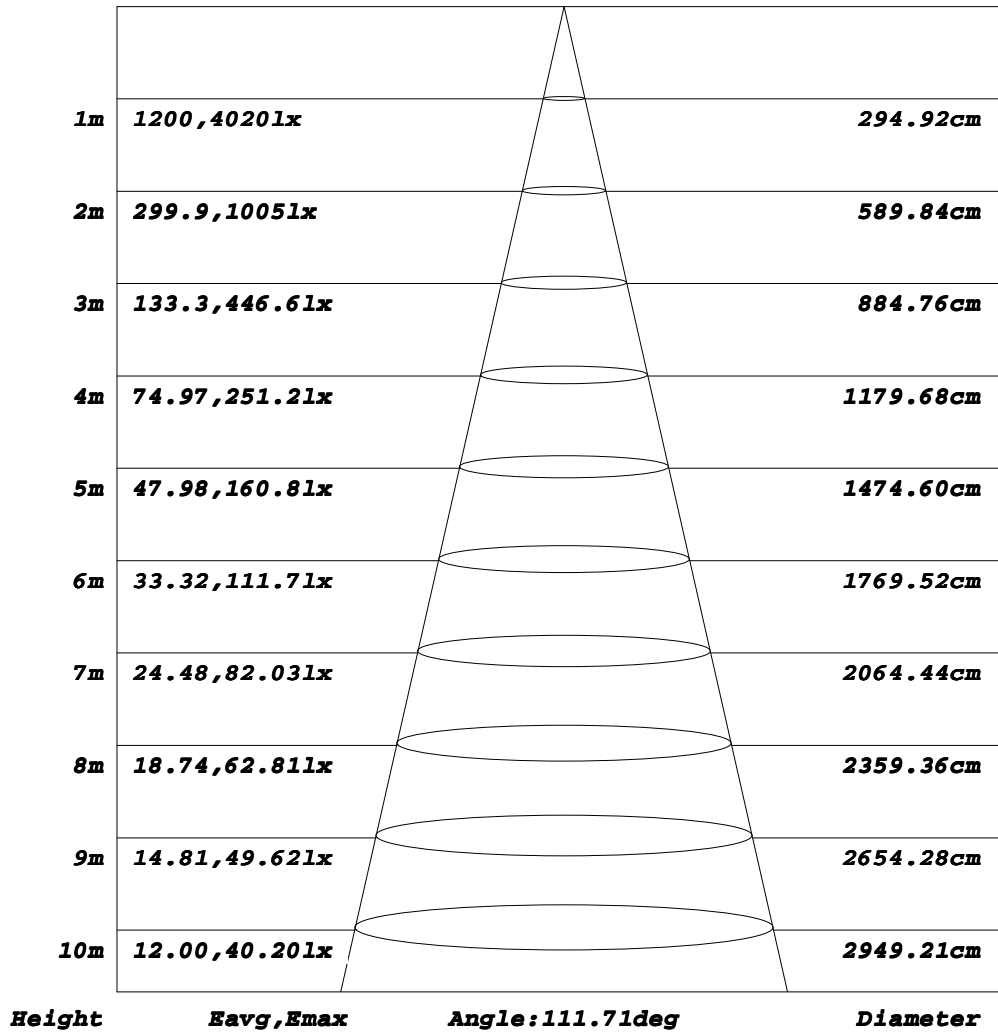


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

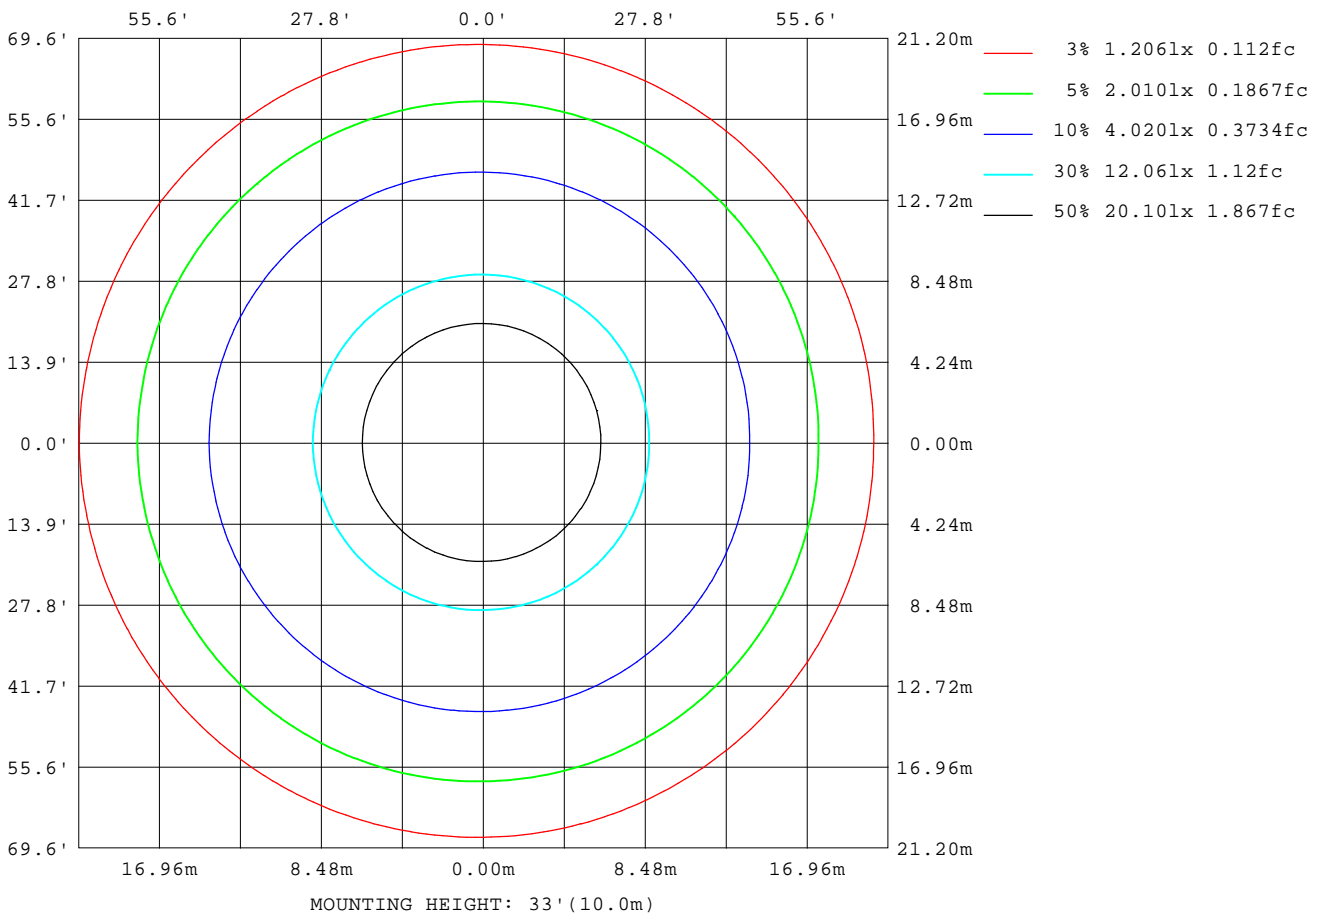

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

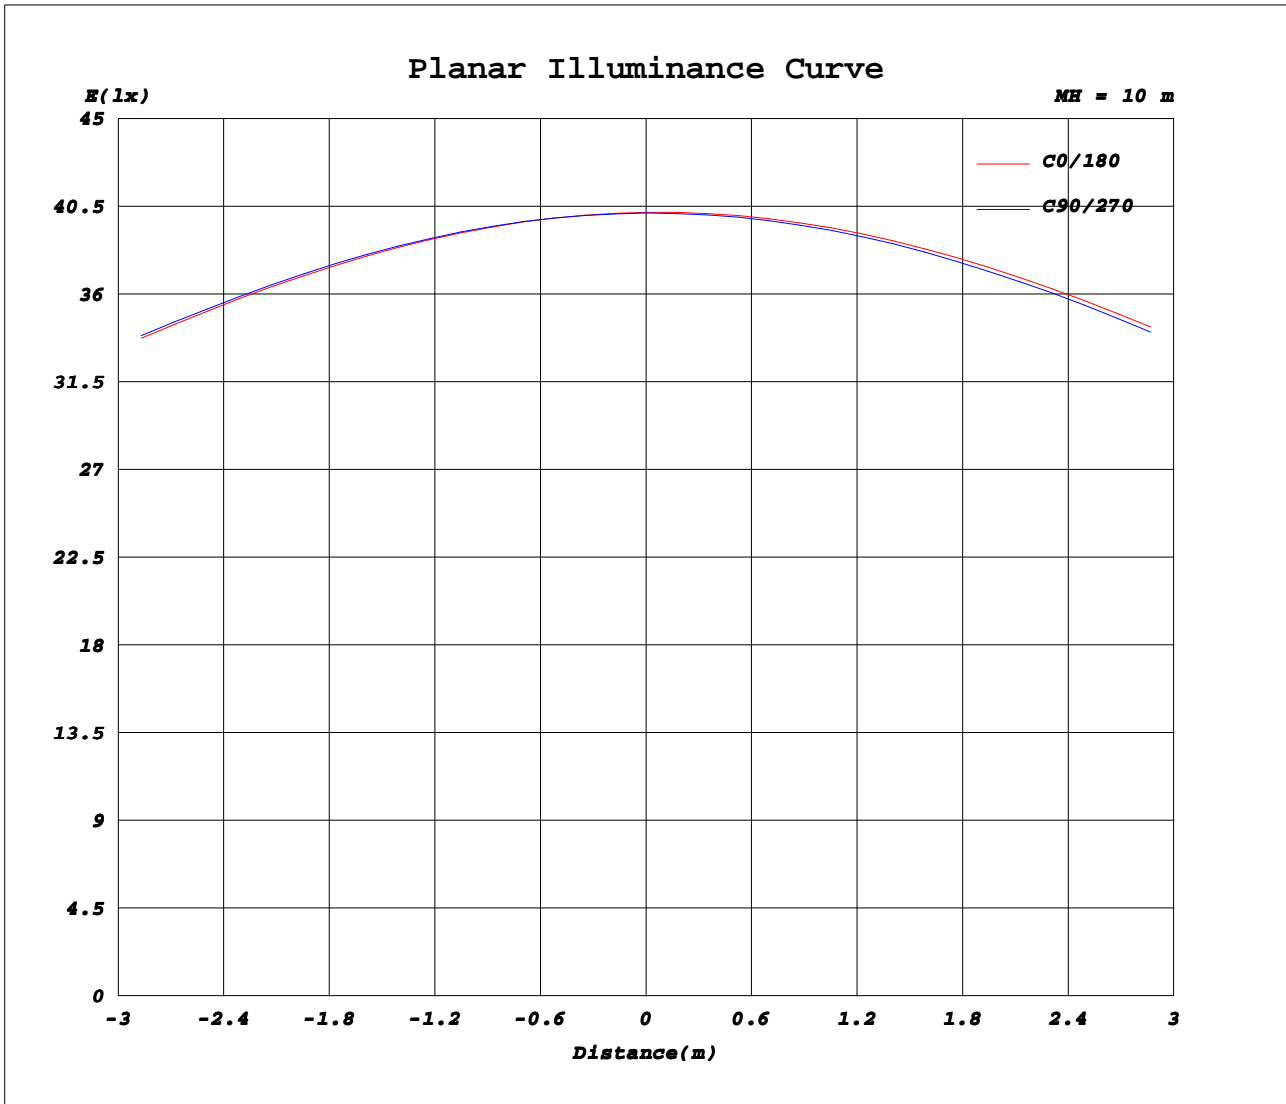

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.4250A P:91.000W PF:0.9660 Freq:50.00Hz		
Lamp Flux:11703.2x1 lm		
Name: NS40-φ875MM-90W	Type: LED	
MFR.: Lumega Group	DIM.: D875*H100mm	
	SUR.: D855mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4020	4018	4016	4016	4017	4018	4020	4018	4017	4016	4016	4018							
5	3990	3990	3991	3993	4000	4007	4012	4010	4005	4000	3997	3993							
10	3924	3924	3927	3933	3945	3957	3966	3963	3955	3946	3939	3931							
15	3823	3824	3828	3837	3854	3871	3884	3880	3870	3857	3847	3835							
20	3688	3689	3695	3706	3728	3750	3767	3762	3750	3734	3720	3705							
25	3519	3521	3528	3541	3568	3596	3616	3611	3596	3576	3559	3540							
30	3322	3324	3333	3349	3381	3412	3436	3429	3412	3388	3368	3346							
35	3098	3101	3111	3129	3165	3201	3227	3219	3198	3171	3149	3124							
40	2852	2856	2867	2887	2927	2966	2995	2985	2962	2931	2906	2880							
45	2581	2585	2598	2620	2663	2705	2737	2726	2701	2668	2641	2612							
50	2299	2301	2313	2336	2384	2431	2466	2453	2425	2389	2360	2330							
55	1996	2000	2014	2037	2084	2129	2163	2152	2126	2091	2061	2030							
60	1679	1685	1700	1724	1772	1818	1852	1841	1814	1778	1748	1715							
65	1352	1358	1373	1398	1446	1492	1527	1518	1492	1456	1425	1391							
70	1020	1027	1042	1067	1114	1161	1195	1186	1161	1125	1094	1059							
75	695	700	714	737	784	830	865	855	830	795	765	732							
80	398	404	418	440	481	520	549	540	517	486	459	430							
85	158	162	172	188	221	253	277	270	251	226	206	183							
90	20.5	16.1	16.7	22.5	39.2	56.6	70.3	66.5	57.3	45.4	37.1	28.8							
95	23.5	22.5	22.1	22.5	24.2	26.2	28.0	28.7	28.8	28.3	27.3	25.7							
100	26.3	25.3	25.0	25.4	27.0	28.8	30.5	31.2	31.3	30.8	29.8	28.3							
105	28.7	27.7	27.4	27.8	29.3	31.2	32.8	33.5	33.5	33.1	32.1	30.7							
110	30.7	29.8	29.5	29.9	31.4	33.2	34.8	35.4	35.5	35.0	34.1	32.6							
115	32.3	31.5	31.3	31.6	33.1	34.9	36.5	37.1	37.1	36.7	35.8	34.3							
120	34.0	33.2	33.0	33.3	34.8	36.4	38.0	38.6	38.7	38.3	37.4	36.0							
125	35.7	34.9	34.7	35.1	36.5	38.1	39.6	40.2	40.3	39.9	39.0	37.6							
130	37.6	36.8	36.5	36.8	38.1	39.7	41.1	41.6	41.8	41.4	40.6	39.3							
135	39.4	38.6	38.3	38.6	39.8	41.3	42.6	43.2	43.3	43.0	42.2	41.0							
140	41.3	40.5	40.3	40.5	41.7	43.0	44.3	44.8	44.9	44.5	43.9	42.8							
145	43.4	42.7	42.4	42.6	43.6	44.8	45.9	46.4	46.5	46.2	45.6	44.7							
150	45.5	44.8	44.6	44.8	45.7	46.7	47.7	48.1	48.1	47.9	47.4	46.6							
155	47.4	46.9	46.6	46.8	47.5	48.5	49.3	49.6	49.6	49.4	49.0	48.3							
160	49.2	48.7	48.5	48.6	49.2	50.0	50.7	50.9	50.9	50.7	50.4	49.9							
165	50.8	50.5	50.3	50.4	50.8	51.3	51.8	51.9	51.9	51.8	51.6	51.3							
170	52.0	51.8	51.7	51.8	52.0	52.3	52.6	52.7	52.7	52.6	52.5	52.3							
175	52.8	52.7	52.6	52.6	52.8	52.9	53.0	53.0	53.0	52.9	52.9	52.9							
180	52.9	52.8	52.8	52.8	52.8	52.9	52.9	52.9	52.8	52.7	52.8	52.8							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: