
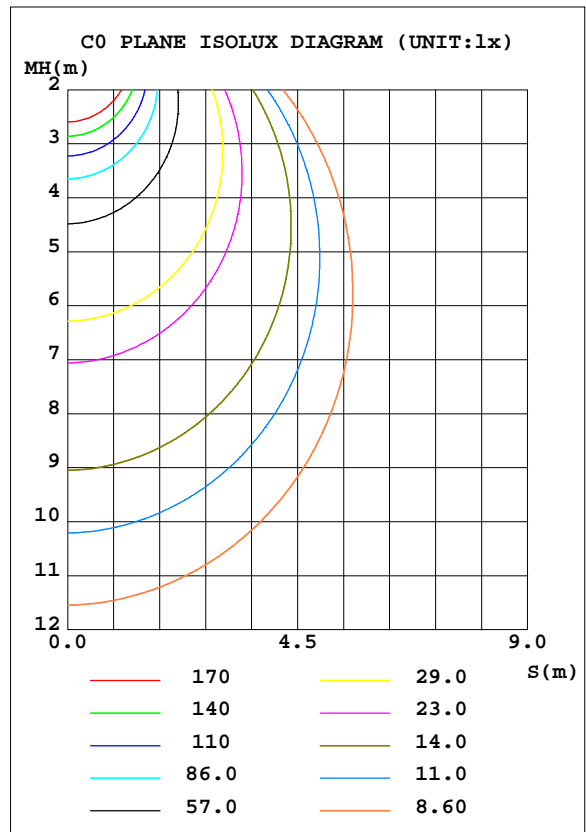


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.95 lm/W			
MODEL		I _{max} (cd)	1147	S/MH(C0/180)	1.24
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3729.4	η UP, DN(C0-180)	2.2, 47.6
NOMINAL FLUX(lm)	3729.43	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.4, 47.9
LAMPS INSIDE	1	η up(%)	4.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	95.4	CIBSE SHR MAX	1.35

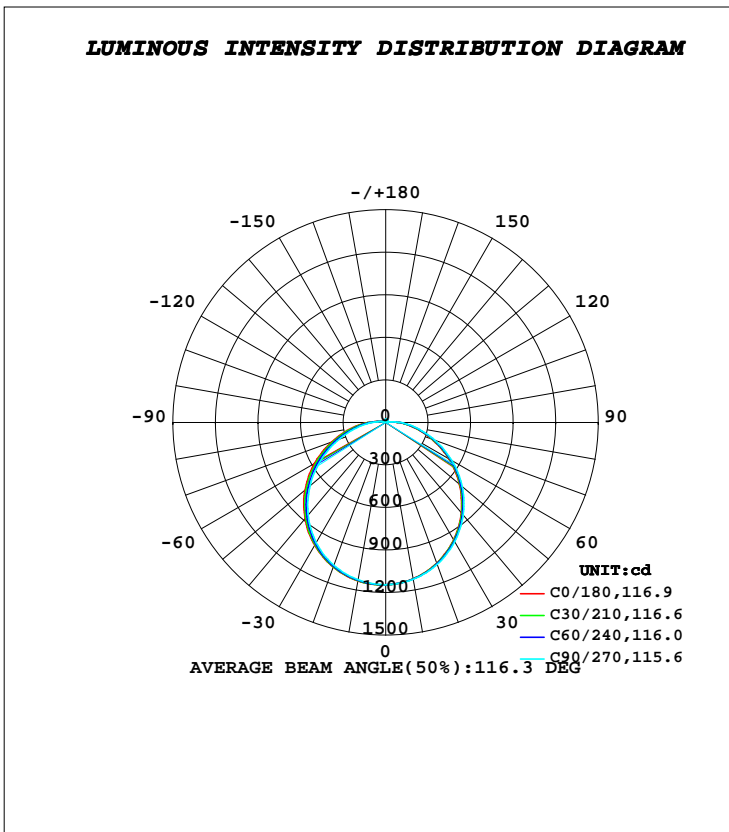

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1119	1120	1123	1130	1135	1132	1126	1123	0- 10	108.4	108.4	2.91,2.91
20	1056	1059	1065	1077	1086	1081	1072	1064	10- 20	311.2	419.6	11.3,11.3
30	957.0	963.7	973.0	988.7	1000	992.9	979.7	968.6	20- 30	474.0	893.6	24,24
40	830.0	839.1	851.1	871.4	885.5	871.6	851.4	839.3	30- 40	575.8	1469	39.4,39.4
50	679.8	690.5	704.5	728.5	744.4	724.0	697.2	685.1	40- 50	604.5	2074	55.6,55.6
60	514.4	526.1	540.8	565.4	580.9	556.0	525.5	515.0	50- 60	559.1	2633	70.6,70.6
70	346.2	356.6	370.1	393.0	407.2	382.4	352.7	344.1	60- 70	449.8	3083	82.7,82.7
80	196.8	207.0	219.2	239.0	250.6	226.8	199.3	192.6	70- 80	306.5	3389	90.9,90.9
90	87.35	92.85	100.9	115.7	125.9	113.7	97.65	90.51	80- 90	169.9	3559	95.4,95.4
100	31.26	33.57	37.11	43.48	48.45	46.23	41.60	36.81	90-100	72.80	3632	97.4,97.4
110	15.10	15.16	15.93	18.09	19.96	19.40	18.06	16.70	100-110	27.91	3660	98.1,98.1
120	13.83	13.32	13.32	14.15	15.03	15.17	14.98	14.52	110-120	14.85	3675	98.5,98.5
130	15.55	15.04	14.95	15.54	16.21	16.39	16.34	16.05	120-130	13.37	3688	98.9,98.9
140	17.15	16.76	16.70	17.21	17.77	17.91	17.85	17.59	130-140	12.82	3701	99.2,99.2
150	18.81	18.48	18.41	18.78	19.20	19.28	19.22	19.06	140-150	11.37	3712	99.5,99.5
160	20.53	20.33	20.27	20.44	20.64	20.64	20.59	20.56	150-160	9.095	3721	99.8,99.8
170	22.12	22.00	21.92	21.93	21.94	21.87	21.83	21.93	160-170	6.002	3727	99.9,99.9
180	22.56	22.46	22.42	22.51	22.59	22.50	22.41	22.45	170-180	2.122	3729	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz		
Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

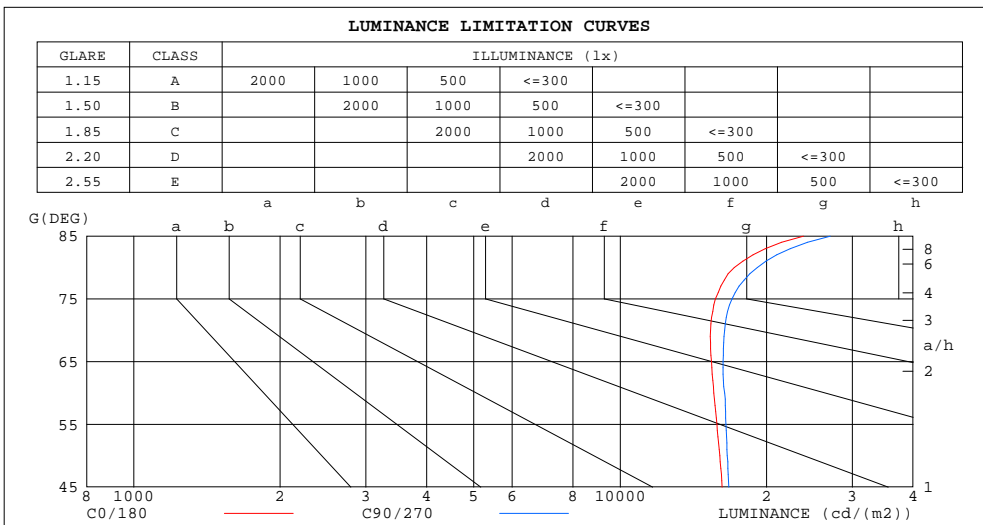

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	23819	27025
80	17168	19129
75	15699	16978
70	15335	16394
65	15402	16286
60	15587	16389
55	15806	16509
50	16024	16607
45	16197	16717


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.01	.96	.92	.98	.94	.90	.93	.89	.86	.88	.85	.83	.84	.82	.79	.77
2.0	.87	.80	.74	.85	.78	.73	.81	.75	.70	.77	.72	.68	.73	.69	.66	.63
3.0	.76	.68	.61	.74	.66	.60	.71	.64	.58	.67	.61	.57	.64	.59	.55	.53
4.0	.67	.58	.51	.66	.57	.51	.63	.55	.49	.60	.53	.48	.57	.52	.47	.45
5.0	.60	.51	.44	.59	.50	.43	.56	.48	.43	.53	.47	.42	.51	.45	.41	.38
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.42	.36	.46	.40	.36	.33
7.0	.49	.40	.34	.48	.39	.33	.46	.38	.33	.44	.37	.32	.42	.36	.32	.30
8.0	.44	.36	.30	.44	.35	.30	.42	.34	.29	.40	.34	.29	.39	.33	.28	.26
9.0	.41	.32	.27	.40	.32	.27	.39	.31	.26	.37	.31	.26	.36	.30	.25	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.23	.33	.27	.23	.21

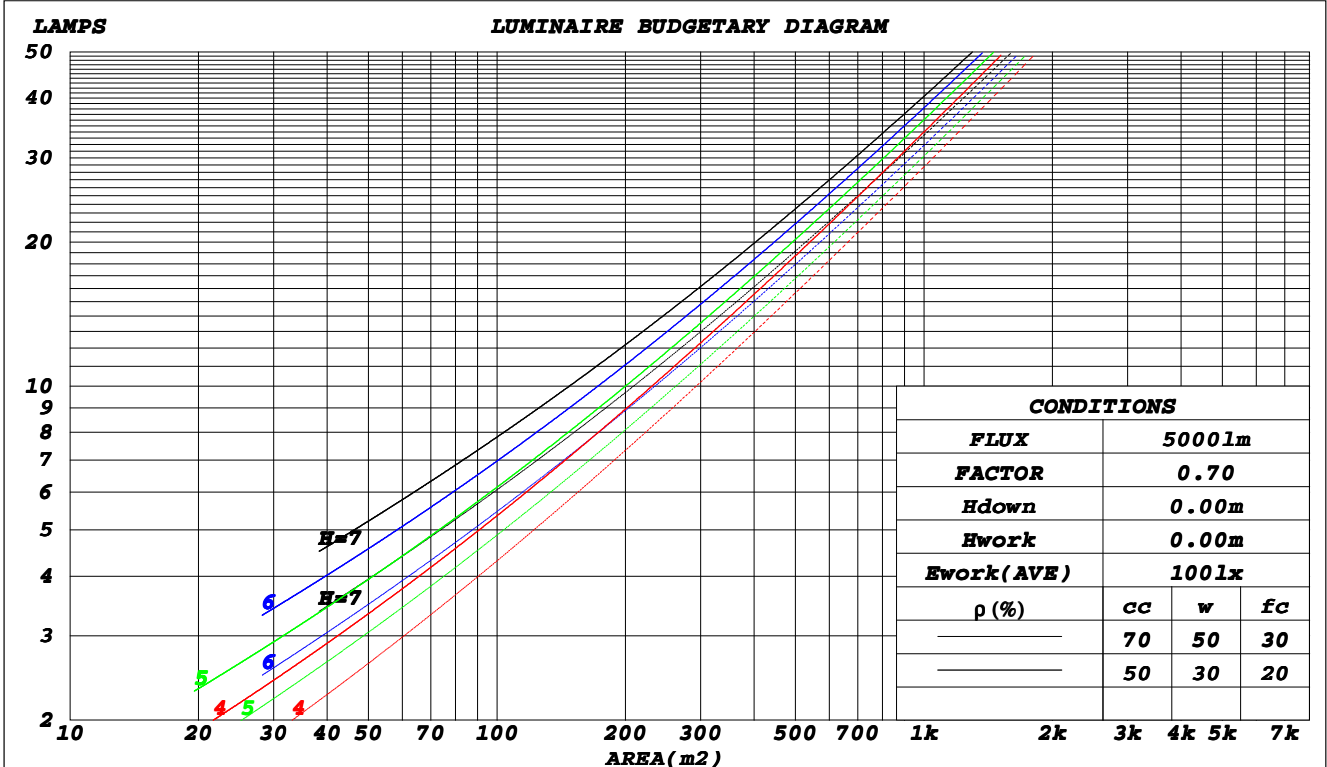

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz		
Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.345	.196	.062	.336	.192	.061	.320	.184	.059	.306	.176	.057	.292	.169	.055	
2.0	.311	.171	.052	.304	.167	.052	.289	.161	.050	.276	.155	.049	.264	.149	.047	
3.0	.283	.150	.045	.276	.148	.044	.263	.143	.043	.251	.138	.042	.240	.133	.041	
4.0	.258	.134	.039	.252	.132	.039	.240	.127	.038	.230	.123	.037	.220	.120	.036	
5.0	.237	.121	.035	.231	.119	.035	.221	.115	.034	.211	.112	.033	.203	.108	.033	
6.0	.218	.109	.031	.213	.108	.031	.204	.105	.030	.196	.102	.030	.188	.099	.029	
7.0	.202	.100	.028	.198	.099	.028	.190	.096	.028	.182	.093	.027	.175	.091	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.088	.025	.170	.086	.025	.163	.084	.024	
9.0	.176	.085	.024	.172	.084	.024	.166	.082	.023	.159	.080	.023	.153	.078	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.076	.021	.150	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.225	.225	.225	.193	.193	.193	.131	.131	.131	.075	.075	.075	.024	.024	.024	
1.0	.218	.191	.167	.186	.164	.143	.127	.113	.099	.073	.065	.058	.024	.021	.019	
2.0	.210	.167	.131	.180	.144	.113	.123	.100	.079	.071	.058	.046	.023	.019	.015	
3.0	.202	.150	.108	.174	.129	.094	.119	.090	.066	.069	.052	.039	.022	.017	.013	
4.0	.195	.137	.093	.167	.118	.081	.115	.082	.057	.066	.048	.034	.021	.016	.011	
5.0	.187	.127	.082	.161	.110	.071	.111	.077	.050	.064	.045	.030	.021	.015	.010	
6.0	.180	.118	.074	.154	.103	.065	.107	.072	.046	.062	.042	.027	.020	.014	.009	
7.0	.173	.112	.069	.149	.097	.060	.103	.068	.042	.060	.040	.025	.019	.013	.008	
8.0	.166	.106	.064	.143	.092	.056	.099	.064	.040	.058	.038	.024	.019	.012	.008	
9.0	.160	.101	.061	.138	.088	.053	.095	.062	.038	.056	.036	.023	.018	.012	.007	
10.0	.154	.097	.058	.133	.084	.051	.092	.059	.036	.054	.035	.022	.017	.011	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.5	22.4	23.8	24.1	22.2	23.7	22.6	24.0	24.3
3H	23.7	25.1	24.1	25.4	25.8	24.0	25.4	24.3	25.7	26.0
4H	24.5	25.8	24.9	26.2	26.5	24.8	26.1	25.2	26.5	26.8
6H	25.2	26.5	25.6	26.8	27.2	25.6	26.8	26.0	27.2	27.6
8H	25.6	26.8	26.0	27.2	27.6	26.0	27.2	26.4	27.6	28.0
12H	26.0	27.1	26.4	27.5	27.9	26.4	27.6	26.8	28.0	28.4
4H 2H	22.7	24.0	23.1	24.4	24.7	22.8	24.2	23.2	24.5	24.9
3H	24.6	25.8	25.0	26.1	26.5	24.8	26.0	25.2	26.3	26.7
4H	25.5	26.6	26.0	27.0	27.4	25.8	26.8	26.2	27.2	27.7
6H	26.4	27.4	26.9	27.8	28.3	26.7	27.7	27.2	28.1	28.6
8H	26.9	27.8	27.4	28.2	28.7	27.2	28.1	27.7	28.6	29.1
12H	27.3	28.2	27.8	28.6	29.1	27.8	28.6	28.3	29.0	29.6
8H 4H	25.9	26.8	26.4	27.3	27.7	26.1	27.0	26.6	27.5	28.0
6H	27.0	27.8	27.6	28.3	28.8	27.3	28.1	27.8	28.6	29.1
8H	27.6	28.3	28.2	28.8	29.4	28.0	28.6	28.5	29.1	29.7
12H	28.3	28.9	28.8	29.4	30.0	28.7	29.3	29.2	29.8	30.4
12H 4H	26.0	26.8	26.5	27.3	27.8	26.2	27.0	26.7	27.5	28.0
6H	27.2	27.9	27.7	28.4	28.9	27.5	28.1	28.0	28.6	29.2
8H	27.9	28.4	28.4	29.0	29.6	28.2	28.8	28.7	29.3	29.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3729 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)
Area: 0.066 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	43	35	54	42	35	52	42	35	28
0.80	64	52	44	63	52	44	61	51	44	36
1.00	72	61	53	71	60	52	68	61	52	44
1.25	79	68	60	78	67	60	74	65	59	51
1.50	84	74	66	82	72	65	79	70	64	56
2.00	91	82	75	89	80	74	85	78	72	63
2.50	95	87	80	93	85	79	89	82	77	67
3.00	99	91	85	96	89	84	92	86	81	71
4.00	103	97	91	100	94	90	95	90	86	76
5.00	106	100	95	103	98	93	98	94	90	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz		
Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

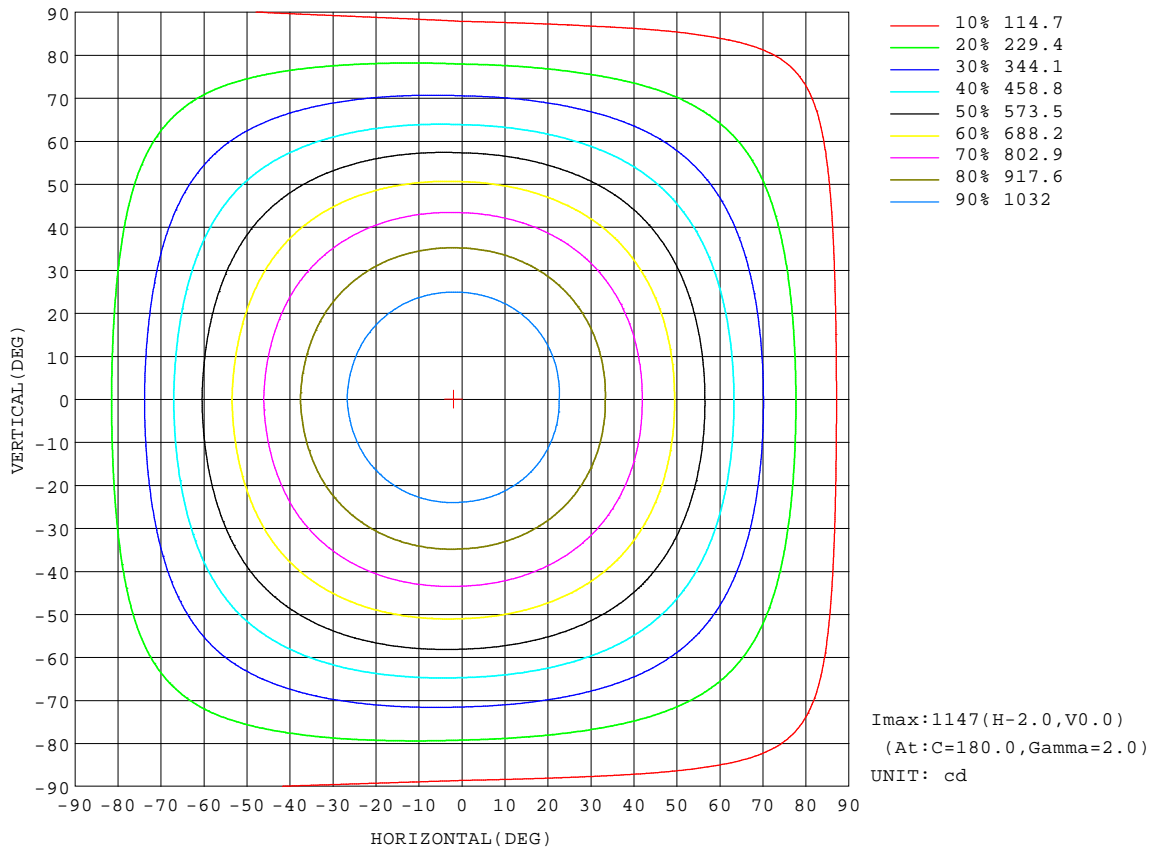


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz		
Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

Flux out:2528 lm

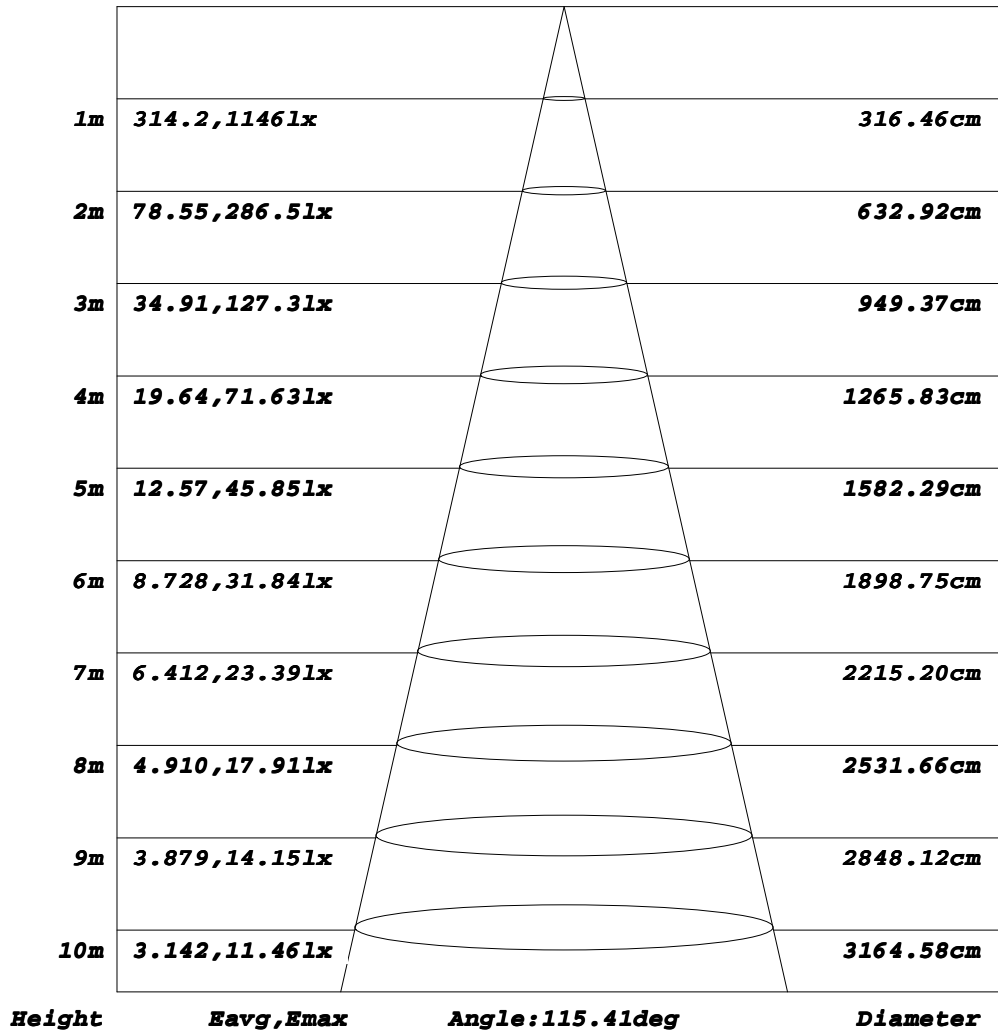


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz		
Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

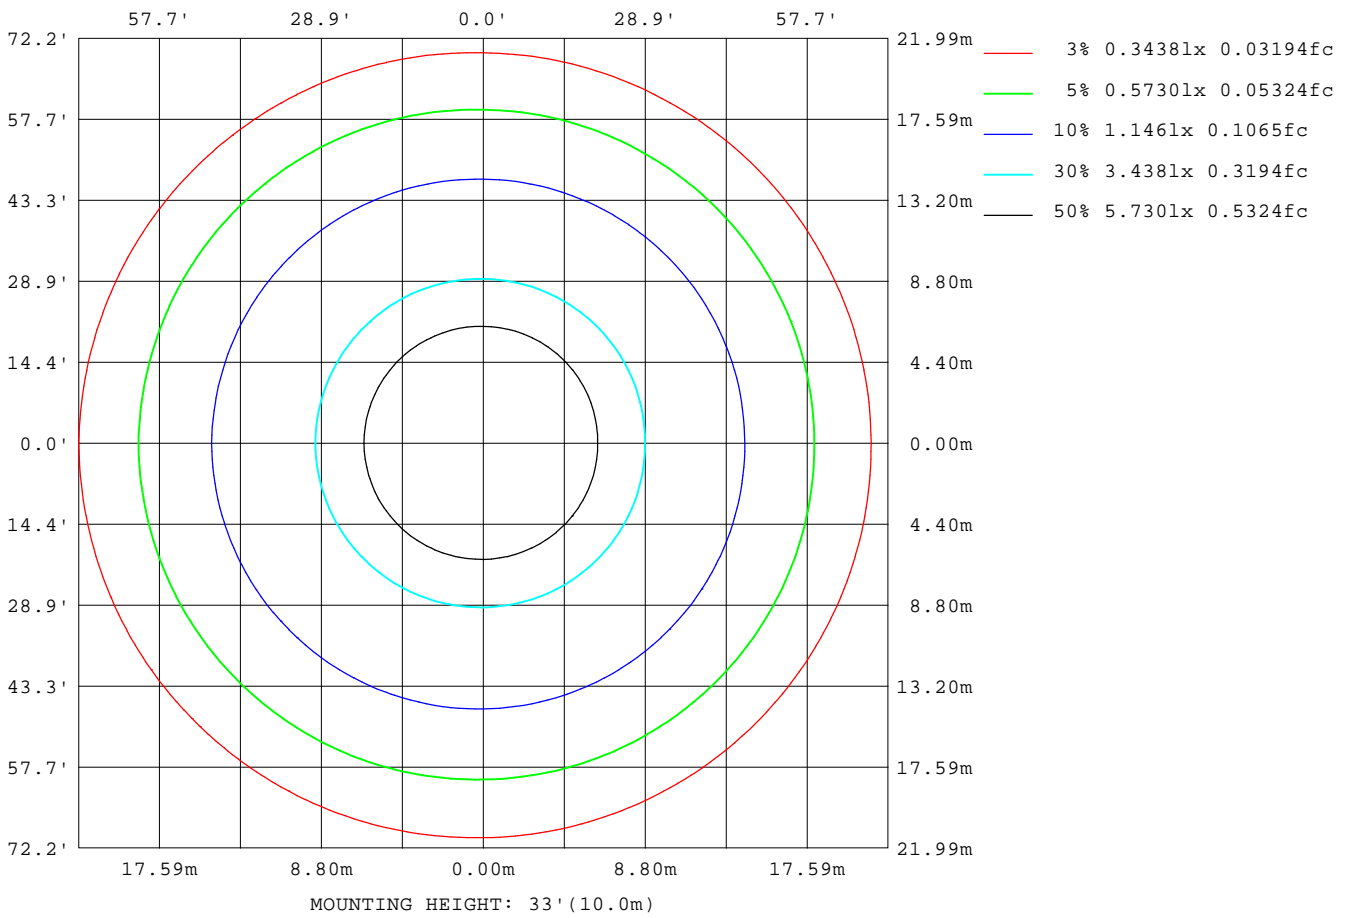

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

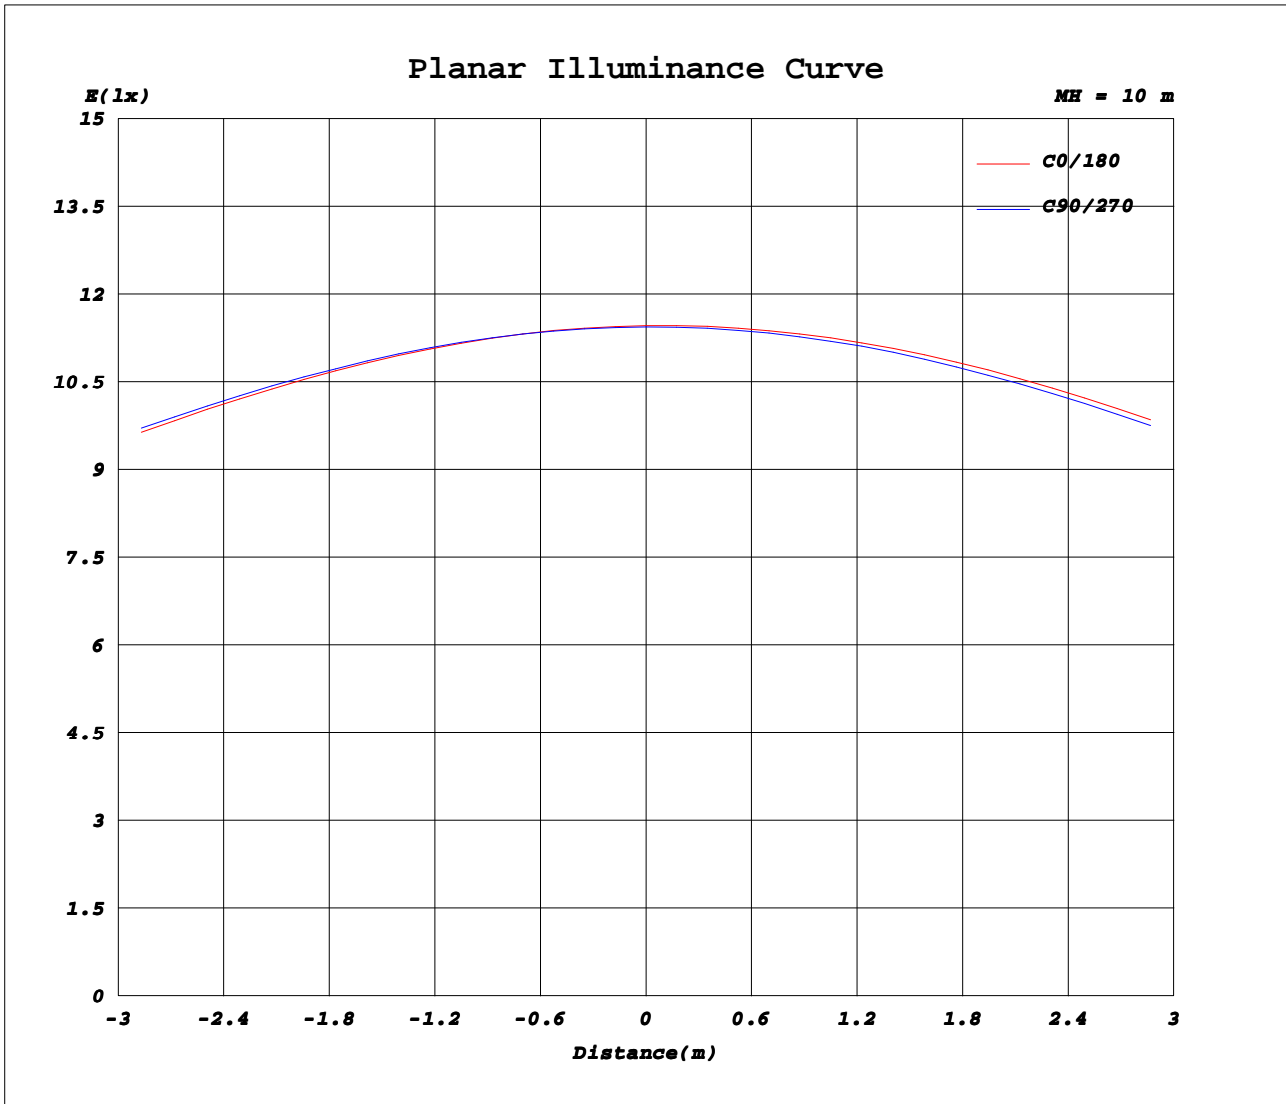

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1290A P:28.700W PF:0.9630 Freq:50.00Hz Lamp Flux:3729.43x1 lm		
Name: NS44-φ350MM-30W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D350*H70mm	
	SUR.: D290mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1146	1145	1144	1144	1145	1145	1146	1145	1145	1144	1144	1145							
5	1138	1137	1138	1138	1141	1143	1145	1144	1142	1140	1139	1138							
10	1119	1120	1121	1123	1127	1132	1135	1133	1130	1126	1124	1122							
15	1092	1093	1095	1099	1105	1111	1115	1113	1109	1104	1100	1096							
20	1056	1057	1061	1065	1073	1080	1086	1083	1078	1072	1067	1061							
25	1010	1013	1017	1023	1032	1041	1047	1045	1039	1031	1024	1018							
30	957	961	966	973	984	994	1000	997	989	980	972	965							
35	897	901	907	915	928	940	948	942	932	919	911	904							
40	830	836	843	851	865	878	885	878	865	851	843	836							
45	756	762	771	780	796	810	818	808	793	777	768	761							
50	680	686	695	705	721	736	744	733	715	697	688	682							
55	598	606	615	625	642	656	664	651	632	613	604	599							
60	514	522	530	541	558	573	581	566	546	526	517	513							
65	430	436	444	454	471	485	493	478	458	438	430	427							
70	346	353	361	370	386	400	407	392	372	353	345	343							
75	268	274	281	290	306	319	326	311	292	272	266	264							
80	197	203	211	219	233	245	251	236	217	199	193	192							
85	137	142	148	155	168	179	184	171	155	139	133	133							
90	87.3	90.6	95.1	101	111	120	126	119	109	97.6	92.2	88.8							
95	50.2	52.2	55.3	59.6	67.2	74.3	79.2	76.7	71.6	65.2	60.3	55.3							
100	31.3	32.6	34.5	37.1	41.4	45.5	48.4	47.5	45.0	41.6	38.5	35.1							
105	20.1	20.9	21.9	23.4	25.9	28.3	30.0	29.5	28.1	26.2	24.4	22.4							
110	15.1	15.0	15.3	15.9	17.4	18.8	20.0	19.7	19.1	18.1	17.2	16.2							
115	13.8	13.4	13.3	13.4	14.1	14.9	15.6	15.6	15.5	15.1	14.8	14.4							
120	13.8	13.4	13.2	13.3	13.8	14.5	15.0	15.2	15.2	15.0	14.7	14.3							
125	14.7	14.2	14.0	14.0	14.4	14.9	15.4	15.5	15.6	15.5	15.3	15.1							
130	15.5	15.1	14.9	15.0	15.3	15.8	16.2	16.4	16.4	16.3	16.2	15.9							
135	16.4	16.0	15.8	15.8	16.2	16.6	17.0	17.1	17.2	17.1	17.0	16.7							
140	17.2	16.8	16.7	16.7	17.0	17.4	17.8	17.9	17.9	17.9	17.7	17.5							
145	18.0	17.7	17.5	17.5	17.8	18.1	18.5	18.6	18.6	18.5	18.4	18.2							
150	18.8	18.5	18.4	18.4	18.6	18.9	19.2	19.3	19.3	19.2	19.1	19.0							
155	19.7	19.5	19.3	19.3	19.5	19.7	19.9	20.0	20.0	19.9	19.9	19.8							
160	20.5	20.4	20.3	20.3	20.4	20.5	20.6	20.6	20.6	20.6	20.6	20.6							
165	21.4	21.3	21.2	21.2	21.2	21.3	21.3	21.3	21.3	21.2	21.3	21.3							
170	22.1	22.0	22.0	21.9	21.9	21.9	21.9	21.9	21.9	21.8	21.9	22.0							
175	22.6	22.5	22.4	22.4	22.4	22.3	22.3	22.3	22.2	22.2	22.3	22.4							
180	22.6	22.5	22.4	22.4	22.5	22.5	22.6	22.5	22.5	22.4	22.4	22.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: