
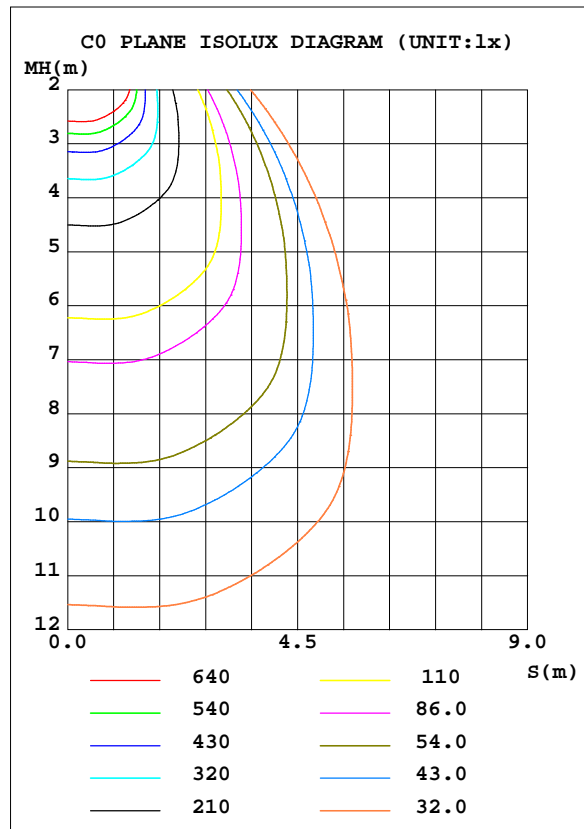


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 164.37 lm/W			
MODEL		I _{max} (cd)	4513	S/MH(C0/180)	1.33
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	11966	η UP, DN(C0-180)	2.1,48.1
NOMINAL FLUX(lm)	11966.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.1,47.7
LAMPS INSIDE	1	η up(%)	4.2	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	221.6	η down(%)	95.8	CIBSE SHR MAX	1.50

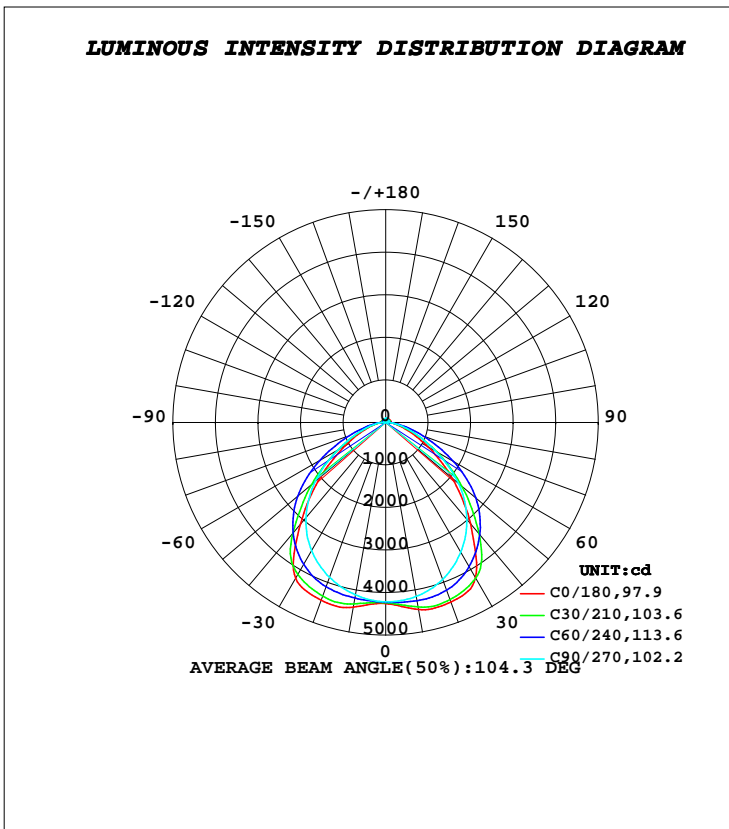

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4465	4328	4152	4272	4408	4261	4114	4275	0- 10	406.6	406.6	3.4,3.4
20	4492	4311	3924	4248	4445	4226	3871	4251	10- 20	1212	1619	13.5,13.5
30	4223	4074	3527	4005	4235	3991	3487	4027	20- 30	1905	3524	29.4,29.4
40	3100	3432	2972	3370	3115	3393	2921	3410	30- 40	2292	5816	48.6,48.6
50	2047	2557	2243	2466	2001	2490	2162	2542	40- 50	2181	7998	66.8,66.8
60	1161	1621	1362	1529	1108	1545	1298	1598	50- 60	1709	9707	81.1,81.1
70	557.4	810.9	691.7	756.0	557.7	768.7	652.5	798.3	60- 70	1057	10764	89.9,89.9
80	233.7	314.0	286.1	296.7	248.2	307.4	264.7	316.2	70- 80	513.0	11277	94.2,94.2
90	99.06	80.82	41.88	78.51	102.5	83.10	36.87	85.33	80- 90	184.8	11462	95.8,95.8
100	101.2	77.30	47.58	77.21	103.8	80.29	42.80	80.98	90-100	82.94	11544	96.5,96.5
110	101.8	80.49	51.17	80.76	104.7	82.75	49.88	83.12	100-110	84.07	11629	97.2,97.2
120	93.55	79.22	60.76	80.40	95.46	82.10	56.69	80.52	110-120	78.49	11707	97.8,97.8
130	93.68	76.13	63.44	82.07	95.35	83.73	63.65	77.24	120-130	71.15	11778	98.4,98.4
140	93.99	77.70	70.25	83.09	94.61	84.86	70.81	78.84	130-140	62.23	11840	98.9,98.9
150	91.62	81.05	78.33	83.87	92.09	86.11	80.52	82.75	140-150	52.02	11892	99.4,99.4
160	91.03	86.47	86.84	85.99	89.19	87.85	89.21	87.38	150-160	39.65	11932	99.7,99.7
170	93.38	93.23	94.32	90.57	90.27	91.21	95.55	92.84	160-170	25.41	11957	99.9,99.9
180	93.51	94.67	98.20	96.25	93.77	94.43	98.29	96.21	170-180	8.954	11966	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

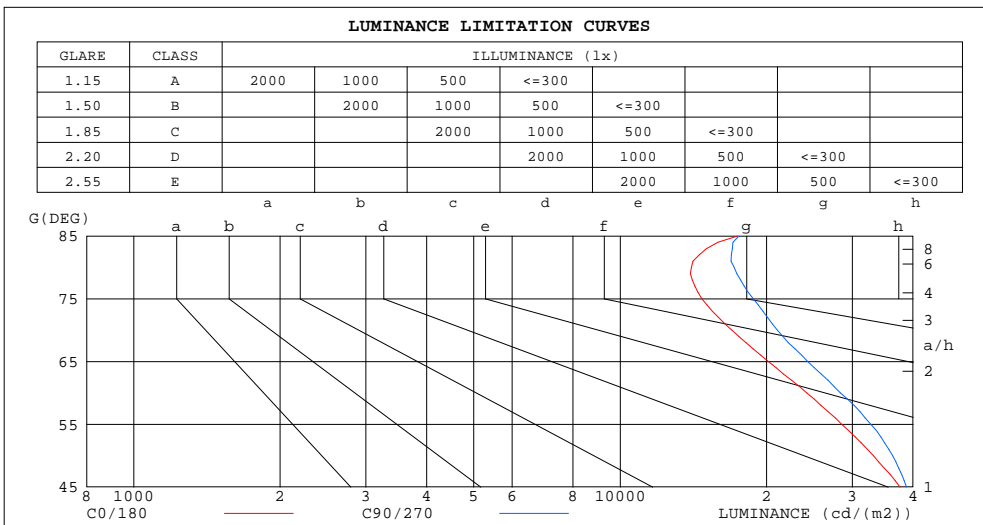

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	17405	17523
80	14018	17164
75	14724	18795
70	16976	21068
65	20193	24318
60	24189	28377
55	28574	32798
50	33180	36346
45	37621	38782


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.04	1.00	.97	1.02	.98	.95	.97	.94	.91	.92	.90	.88	.88	.86	.84	.82
2.0	.92	.86	.80	.90	.84	.79	.85	.81	.76	.82	.78	.74	.78	.75	.72	.70
3.0	.81	.74	.68	.79	.72	.67	.76	.70	.65	.73	.68	.63	.70	.65	.62	.60
4.0	.73	.64	.58	.71	.63	.57	.68	.61	.56	.65	.59	.55	.63	.58	.54	.51
5.0	.65	.57	.50	.64	.56	.50	.61	.54	.49	.59	.53	.48	.57	.51	.47	.45
6.0	.59	.50	.44	.58	.50	.44	.55	.48	.43	.53	.47	.42	.51	.46	.42	.40
7.0	.53	.45	.39	.52	.44	.39	.50	.43	.38	.49	.42	.38	.47	.41	.37	.35
8.0	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.38	.34	.43	.38	.33	.31
9.0	.45	.37	.31	.44	.36	.31	.43	.36	.31	.41	.35	.31	.40	.34	.30	.28
10.0	.41	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.37	.31	.27	.26

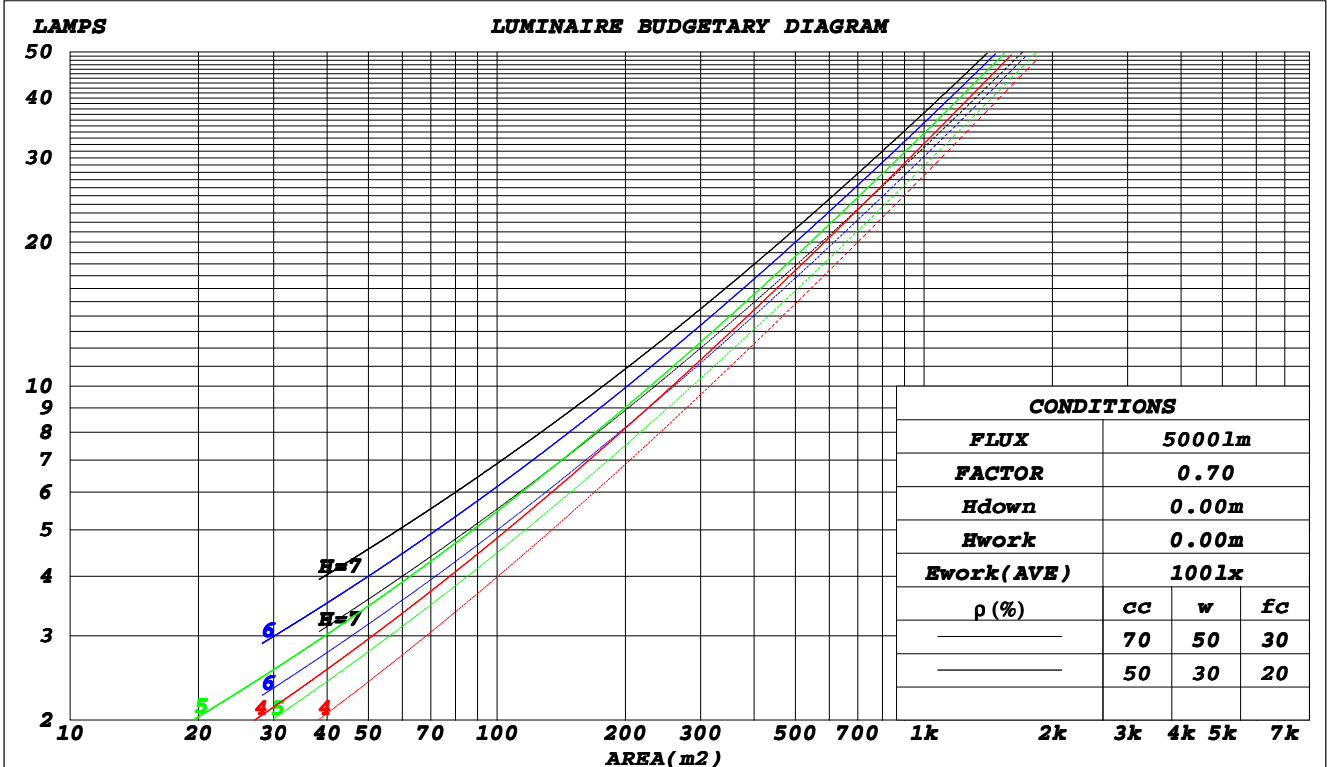

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.283	.161	.051	.275	.157	.050	.259	.149	.048	.245	.141	.045	.232	.134	.043	
2.0	.268	.147	.045	.261	.144	.044	.247	.138	.043	.235	.132	.041	.223	.126	.040	
3.0	.251	.133	.040	.244	.131	.039	.232	.126	.038	.221	.121	.037	.210	.116	.036	
4.0	.233	.121	.036	.228	.119	.035	.217	.115	.034	.207	.111	.033	.197	.107	.033	
5.0	.217	.111	.032	.212	.109	.032	.203	.105	.031	.193	.102	.030	.185	.099	.030	
6.0	.203	.102	.029	.198	.100	.029	.190	.097	.028	.181	.094	.028	.174	.091	.027	
7.0	.190	.094	.027	.186	.093	.026	.178	.090	.026	.170	.087	.025	.163	.085	.025	
8.0	.178	.087	.024	.174	.086	.024	.167	.084	.024	.161	.081	.023	.154	.079	.023	
9.0	.168	.081	.023	.164	.080	.022	.158	.078	.022	.152	.076	.022	.146	.074	.021	
10.0	.158	.076	.021	.155	.075	.021	.149	.073	.021	.144	.071	.020	.138	.070	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.223	.223	.223	.190	.190	.190	.130	.130	.130	.075	.075	.075	.024	.024	.024	
1.0	.211	.189	.169	.180	.162	.145	.123	.111	.101	.071	.065	.058	.023	.021	.019	
2.0	.202	.165	.133	.173	.142	.115	.118	.098	.080	.068	.057	.047	.022	.018	.015	
3.0	.194	.147	.110	.166	.127	.095	.114	.088	.067	.066	.051	.039	.021	.017	.013	
4.0	.186	.134	.094	.160	.115	.081	.110	.080	.057	.063	.047	.034	.020	.015	.011	
5.0	.179	.123	.082	.153	.107	.071	.106	.074	.050	.061	.044	.030	.020	.014	.010	
6.0	.172	.115	.074	.148	.099	.064	.102	.070	.045	.059	.041	.027	.019	.013	.009	
7.0	.165	.108	.068	.142	.094	.059	.098	.066	.042	.057	.039	.025	.018	.013	.008	
8.0	.159	.102	.063	.137	.089	.055	.095	.062	.039	.055	.037	.023	.018	.012	.008	
9.0	.153	.097	.059	.132	.084	.052	.092	.059	.037	.053	.035	.022	.017	.011	.007	
10.0	.148	.093	.056	.128	.081	.049	.089	.057	.035	.052	.034	.021	.017	.011	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.2	25.6	24.5	25.9	26.1	25.2	26.6	25.5	26.9	27.1
3H	24.9	26.1	25.2	26.4	26.8	26.1	27.3	26.4	27.6	28.0
4H	25.1	26.3	25.5	26.6	26.9	26.4	27.6	26.7	27.9	28.2
6H	25.2	26.4	25.6	26.7	27.1	26.6	27.7	26.9	28.0	28.4
8H	25.3	26.4	25.7	26.8	27.1	26.6	27.7	27.0	28.1	28.4
12H	25.4	26.4	25.8	26.8	27.2	26.7	27.7	27.1	28.1	28.5
4H 2H	24.8	26.0	25.2	26.3	26.7	25.6	26.8	26.0	27.1	27.5
3H	25.6	26.7	26.0	27.0	27.4	26.7	27.8	27.1	28.1	28.5
4H	25.9	26.9	26.4	27.3	27.7	27.2	28.1	27.6	28.5	28.9
6H	26.2	27.0	26.6	27.4	27.9	27.5	28.3	27.9	28.7	29.2
8H	26.3	27.1	26.8	27.5	28.0	27.6	28.4	28.1	28.8	29.3
12H	26.4	27.1	26.9	27.6	28.1	27.7	28.4	28.2	28.8	29.3
8H 4H	26.2	26.9	26.6	27.4	27.8	27.3	28.0	27.7	28.5	29.0
6H	26.5	27.2	27.0	27.7	28.2	27.7	28.4	28.2	28.9	29.4
8H	26.7	27.3	27.2	27.8	28.3	27.9	28.5	28.5	29.0	29.5
12H	26.9	27.4	27.5	27.9	28.5	28.1	28.6	28.7	29.1	29.7
12H 4H	26.2	26.9	26.7	27.3	27.8	27.2	28.0	27.7	28.4	28.9
6H	26.6	27.2	27.1	27.7	28.2	27.8	28.3	28.3	28.8	29.4
8H	26.8	27.3	27.4	27.8	28.4	28.0	28.5	28.5	29.0	29.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.5					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.5 / - 0.7				
2.0H	+ 0.4 / - 0.9					+ 0.4 / - 1.0				

CIE Pub.117, 11966 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.6)
 Area: 0.096 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	59	48	42	59	48	42	57	47	41	35
0.80	70	59	52	68	58	51	66	57	51	44
1.00	78	68	61	77	67	60	74	68	60	53
1.25	85	75	68	83	74	68	80	72	67	60
1.50	90	80	74	88	79	73	84	77	72	64
2.00	96	88	82	94	87	81	90	84	79	71
2.50	100	92	87	97	91	86	93	88	83	74
3.00	103	96	91	100	94	90	96	91	87	78
4.00	106	101	97	104	99	95	99	95	92	82
5.00	108	104	100	106	102	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

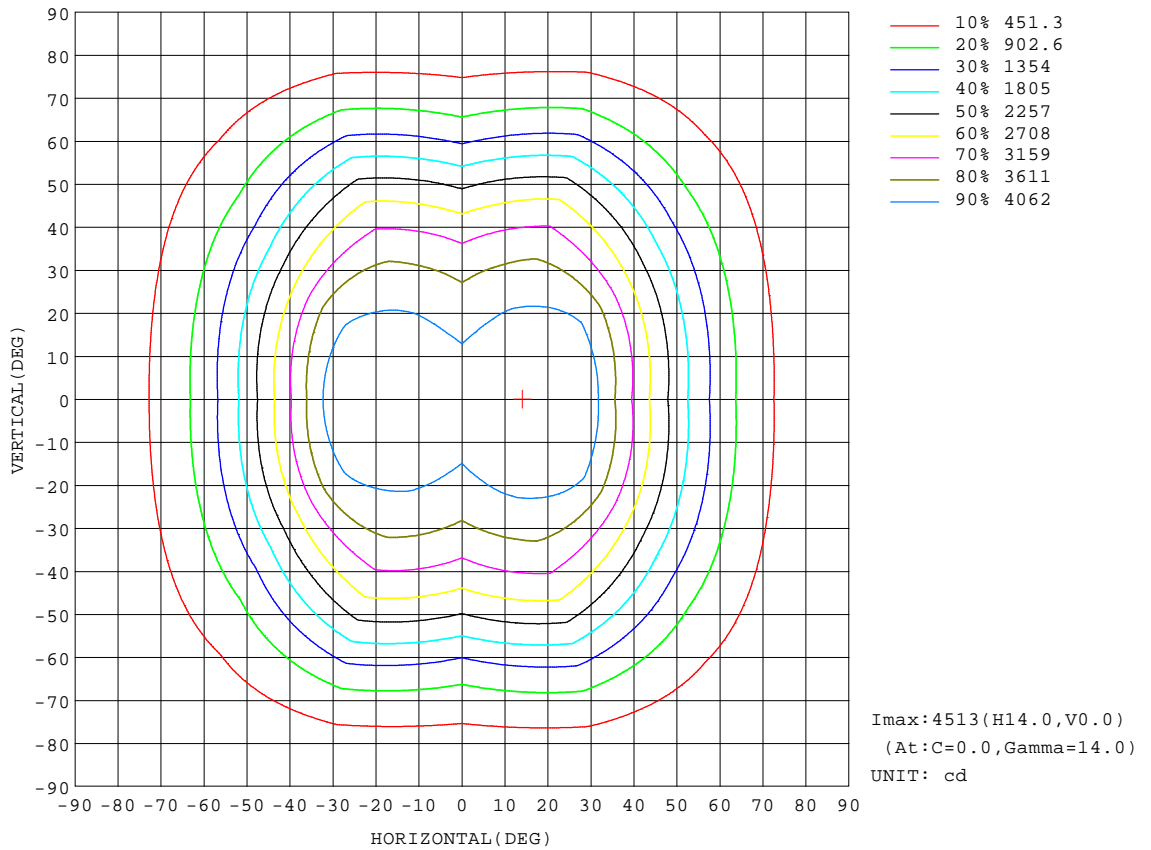


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

Flux out:7795 lm

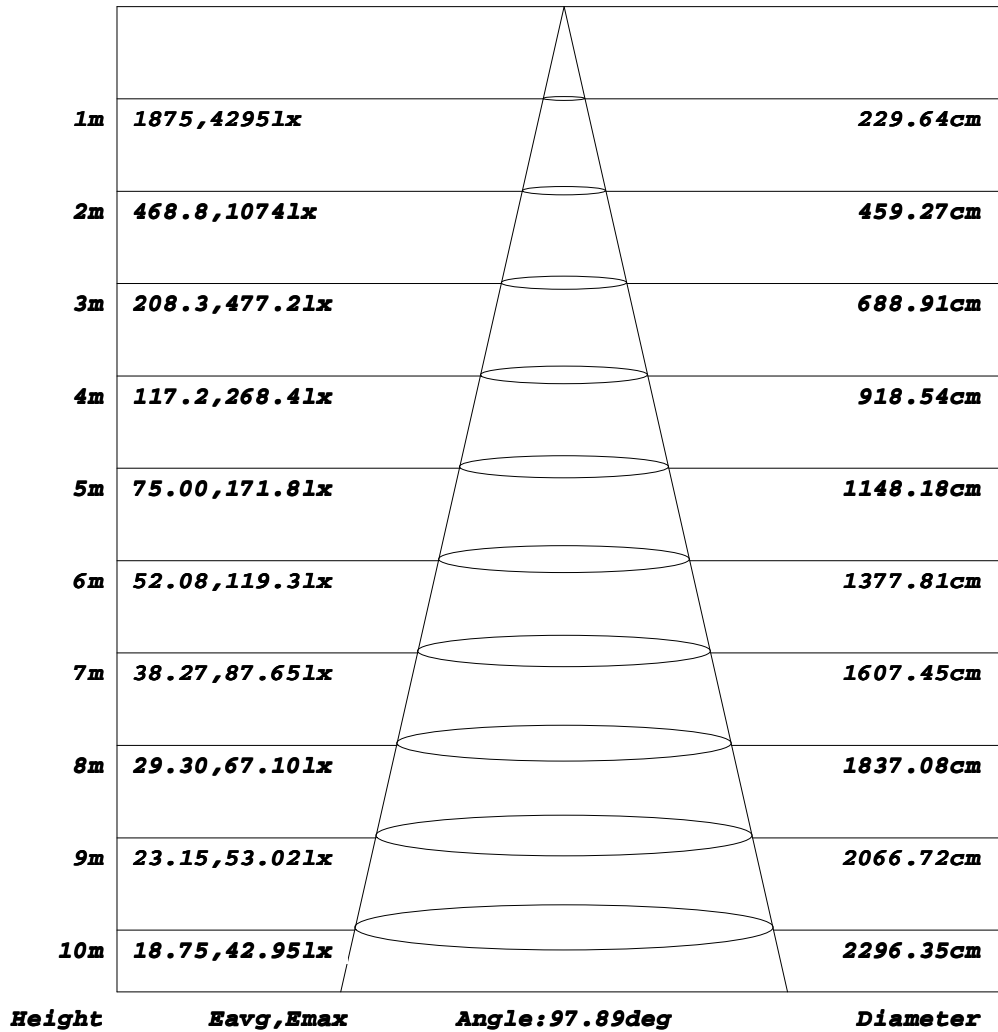


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

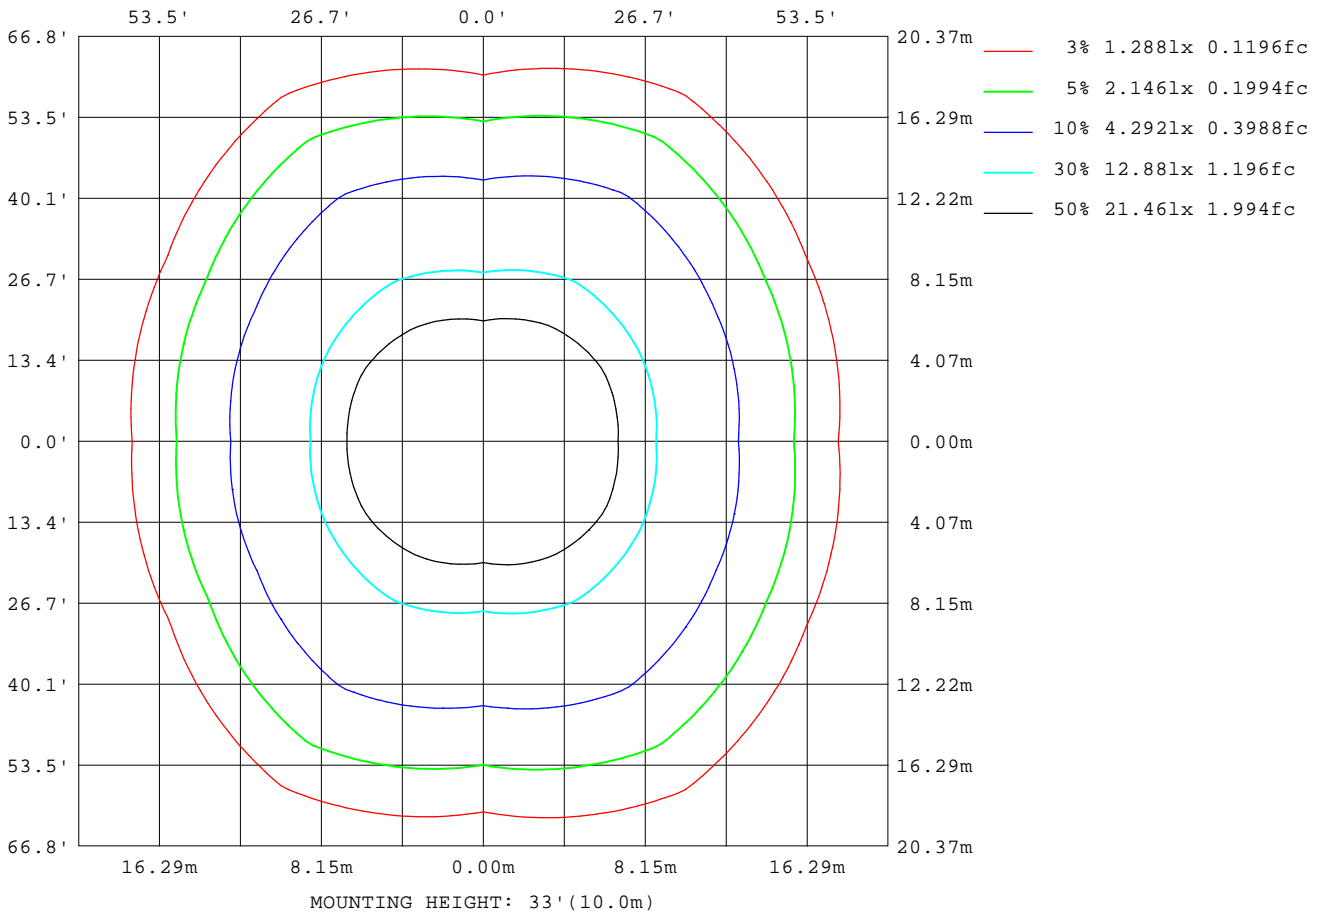

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

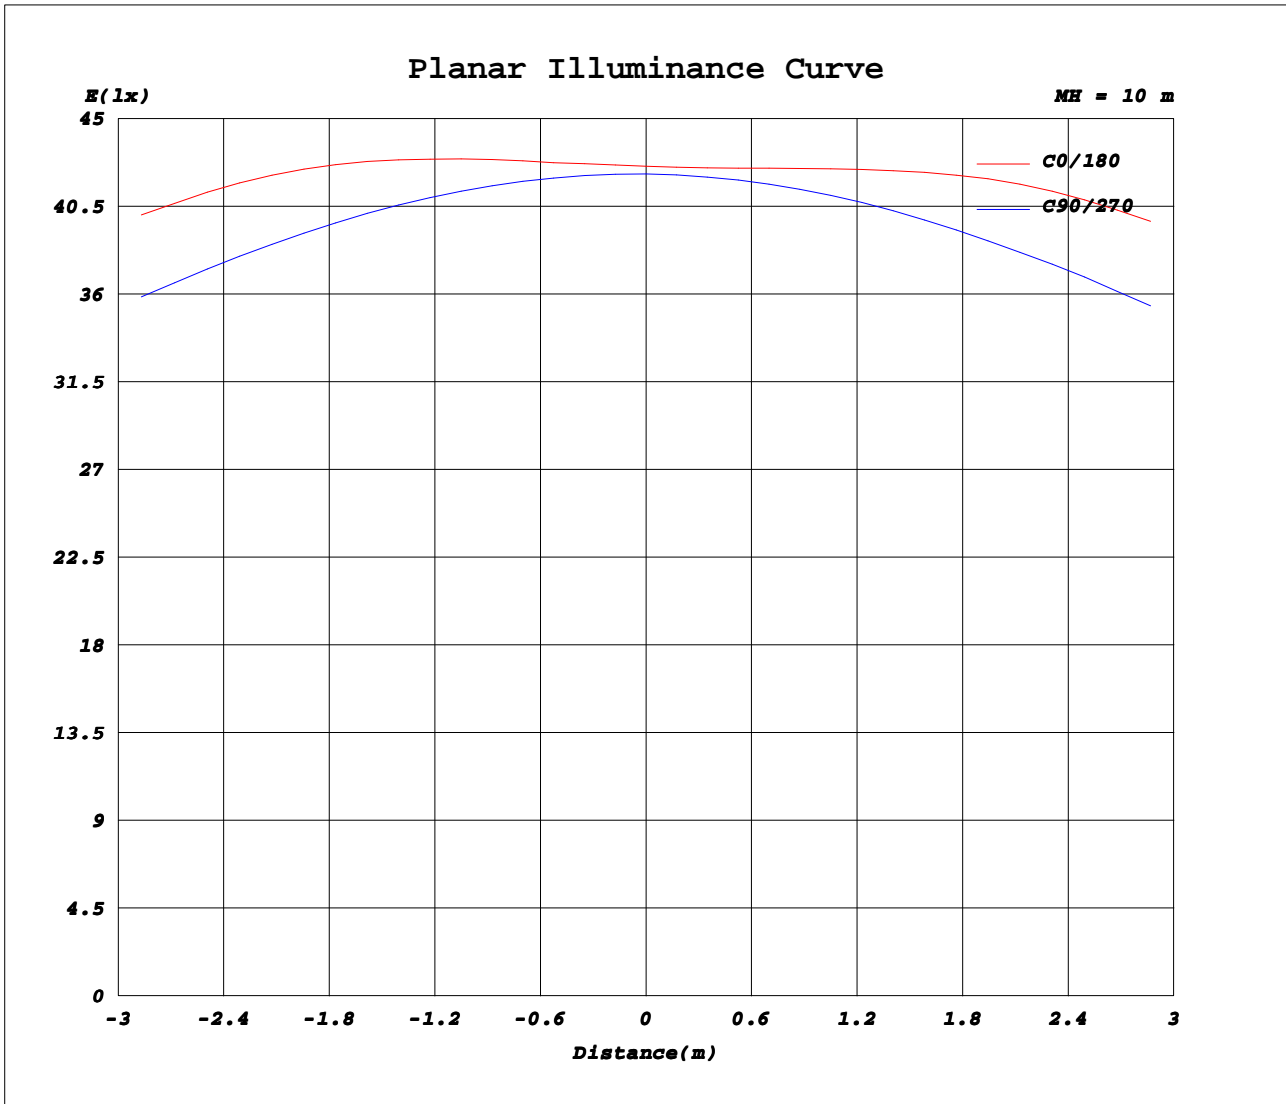

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.3370A P:72.800W PF:0.9800 Freq:50.00Hz		
Lamp Flux:11966.4x1 lm		
Name: NS51-75W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*65*55mm	
	SUR.: 1480*65mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4257	4239	4228	4216	4209	4205	4257	4239	4228	4216	4209	4205							
5	4340	4303	4245	4203	4212	4244	4293	4256	4209	4186	4208	4252							
10	4465	4403	4254	4152	4211	4333	4408	4331	4191	4114	4204	4345							
15	4512	4461	4244	4060	4195	4389	4474	4381	4162	4011	4185	4399							
20	4492	4429	4194	3924	4148	4348	4445	4343	4109	3871	4135	4367							
25	4437	4356	4089	3745	4042	4265	4384	4258	4011	3700	4036	4294							
30	4223	4229	3919	3527	3873	4136	4235	4128	3853	3487	3880	4174							
35	3678	3936	3701	3269	3659	3869	3756	3891	3651	3227	3680	3901							
40	3100	3419	3444	2972	3395	3345	3115	3399	3388	2921	3425	3395							
45	2554	2864	3132	2633	3078	2752	2545	2803	3067	2562	3112	2845							
50	2047	2345	2769	2243	2716	2217	2001	2274	2706	2162	2750	2333							
55	1573	1849	2330	1806	2285	1703	1505	1754	2266	1727	2295	1836							
60	1161	1393	1849	1362	1807	1251	1108	1300	1790	1298	1814	1383							
65	819	994	1375	987	1331	884	797	923	1317	938	1338	992							
70	557	673	948	692	907	605	558	632	905	652	923	674							
75	366	435	606	467	578	398	377	417	583	442	596	439							
80	234	272	357	286	340	253	248	266	349	265	356	277							
85	146	162	186	147	176	152	160	161	183	130	188	167							
90	99.1	93.3	68.3	41.9	66.8	90.2	102	96.2	70.0	36.9	72.4	98.3							
95	96.5	89.9	63.8	46.0	63.5	87.8	99.3	92.7	66.2	39.3	66.3	94.4							
100	101	90.4	64.2	47.6	64.5	89.9	104	94.0	66.5	42.8	67.3	94.7							
105	105	92.0	68.3	49.6	68.4	91.9	106	94.9	69.2	46.3	70.9	95.2							
110	102	91.6	69.4	51.2	71.4	90.1	105	93.5	72.0	49.9	70.7	95.6							
115	95.6	88.3	69.4	57.5	72.2	86.6	98.1	90.2	72.8	53.3	70.0	90.7							
120	93.5	88.7	69.7	60.8	73.7	87.1	95.5	90.2	74.0	56.7	70.3	90.7							
125	93.5	84.2	70.1	62.0	75.0	87.8	95.5	91.0	75.1	60.2	70.4	86.4							
130	93.7	81.7	70.6	63.4	75.8	88.4	95.4	91.6	75.8	63.7	70.7	83.8							
135	93.8	81.6	71.5	66.7	76.5	88.8	95.1	92.1	76.3	67.1	71.3	82.6							
140	94.0	82.0	73.4	70.3	77.4	88.7	94.6	92.0	77.7	70.8	73.5	84.2							
145	93.3	82.6	75.9	74.0	78.5	88.3	93.5	91.4	79.6	75.6	76.9	84.9							
150	91.6	83.2	78.9	78.3	80.0	87.7	92.1	90.5	81.7	80.5	80.4	85.1							
155	91.0	84.5	82.4	82.6	82.2	87.0	90.5	89.4	84.2	85.1	83.9	85.9							
160	91.0	86.4	86.5	86.8	85.4	86.6	89.2	88.5	87.2	89.2	87.6	87.2							
165	91.3	88.8	90.7	90.9	88.8	87.2	88.4	88.4	90.2	92.7	91.3	88.9							
170	93.4	92.3	94.1	94.3	91.6	89.5	90.3	89.8	92.6	95.6	94.3	91.4							
175	94.8	95.0	96.8	97.1	93.9	91.8	92.4	91.5	94.0	97.2	96.2	93.5							
180	93.5	93.0	96.4	98.2	97.5	95.0	93.8	92.8	96.0	98.3	97.5	94.9							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: