
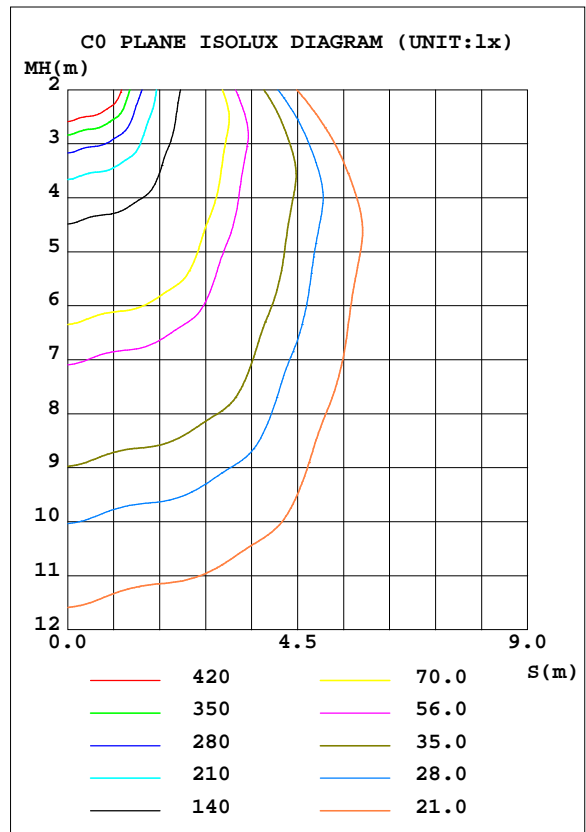


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.43 lm/W			
MODEL		I _{max} (cd)	2826	S/MH(C0/180)	1.22
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	8858.8	η UP, DN(C0-180)	2.1,46.8
NOMINAL FLUX(lm)	8858.78	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.4,48.8
LAMPS INSIDE	1	η up(%)	4.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	95.5	CIBSE SHR MAX	1.35

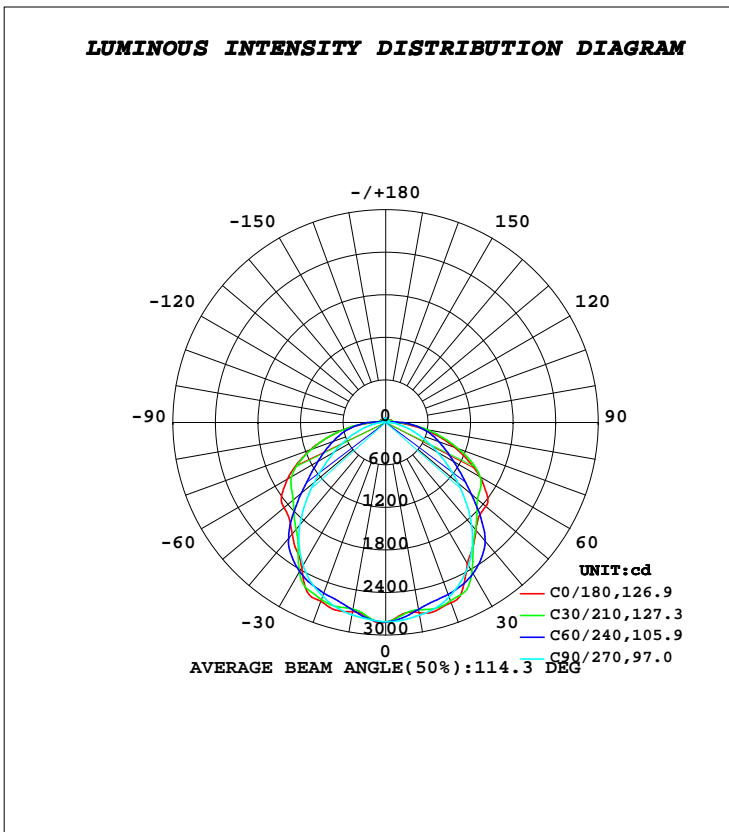

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2725	2679	2760	2671	2709	2679	2754	2703	0- 10	261.0	261.0	2.95,2.95
20	2707	2630	2617	2614	2683	2609	2605	2613	10- 20	757.1	1018	11.5,11.5
30	2306	2448	2334	2345	2371	2432	2333	2492	20- 30	1172	2191	24.7,24.7
40	1984	2079	1887	1932	2053	2050	1884	2135	30- 40	1382	3572	40.3,40.3
50	1846	1638	1332	1559	1872	1632	1316	1718	40- 50	1400	4972	56.1,56.1
60	1540	1326	852.8	1272	1602	1318	844.6	1393	50- 60	1303	6275	70.8,70.8
70	1040	948.2	475.4	896.6	1136	956.9	480.4	1044	60- 70	1088	7363	83.1,83.1
80	532.5	561.6	200.1	480.9	614.0	567.6	204.8	669.8	70- 80	743.4	8106	91.5,91.5
90	144.1	200.4	49.25	148.3	176.1	210.4	55.61	278.6	80- 90	356.4	8463	95.5,95.5
100	86.67	79.41	34.97	73.11	91.55	84.31	40.03	97.33	90-100	121.3	8584	96.9,96.9
110	78.90	56.38	32.22	53.89	82.21	61.54	36.70	68.09	100-110	70.65	8655	97.7,97.7
120	64.36	46.37	33.02	46.20	76.02	51.34	36.47	52.80	110-120	53.82	8708	98.3,98.3
130	48.73	40.01	36.29	41.56	54.66	45.79	39.78	44.66	120-130	41.77	8750	98.8,98.8
140	45.75	42.81	41.67	44.74	49.21	47.61	44.64	45.12	130-140	33.93	8784	99.2,99.2
150	49.35	47.52	47.49	49.27	51.57	51.36	49.81	49.00	140-150	29.62	8814	99.5,99.5
160	53.32	52.61	52.96	53.75	54.11	54.91	54.47	53.02	150-160	23.78	8838	99.8,99.8
170	58.02	57.10	57.33	57.70	57.70	57.88	57.85	56.67	160-170	15.70	8853	99.9,99.9
180	59.68	59.20	59.10	58.47	59.88	59.20	59.03	58.46	170-180	5.562	8859	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

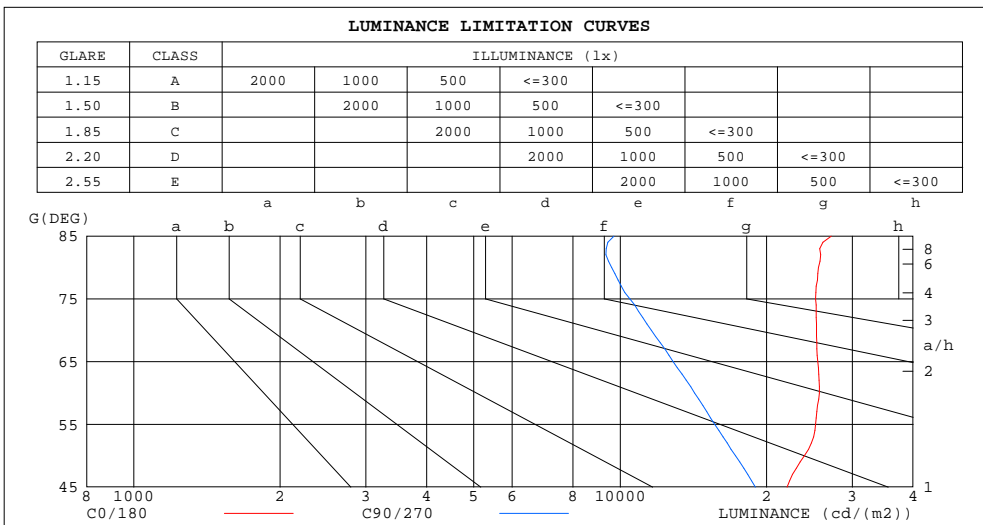

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	27167	9715
80	25552	9601
75	25223	10474
70	25349	11584
65	25478	12857
60	25665	14213
55	25216	15646
50	23927	17266
45	22024	18979


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.01	.97	.92	.99	.94	.90	.93	.90	.87	.89	.86	.83	.84	.82	.80	.77
2.0	.88	.80	.74	.85	.79	.73	.81	.75	.71	.77	.72	.68	.73	.69	.66	.64
3.0	.77	.68	.61	.75	.67	.60	.71	.64	.59	.68	.62	.57	.64	.60	.56	.53
4.0	.68	.59	.52	.66	.58	.51	.63	.56	.50	.60	.54	.49	.57	.52	.47	.45
5.0	.60	.51	.44	.59	.50	.44	.56	.49	.43	.54	.47	.42	.51	.46	.41	.39
6.0	.54	.45	.39	.53	.44	.38	.51	.43	.37	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.39	.33	.44	.38	.33	.43	.37	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.39	.33	.29	.27
9.0	.41	.33	.27	.40	.32	.27	.39	.32	.27	.37	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.25	.37	.30	.24	.36	.29	.24	.35	.28	.24	.34	.28	.23	.22

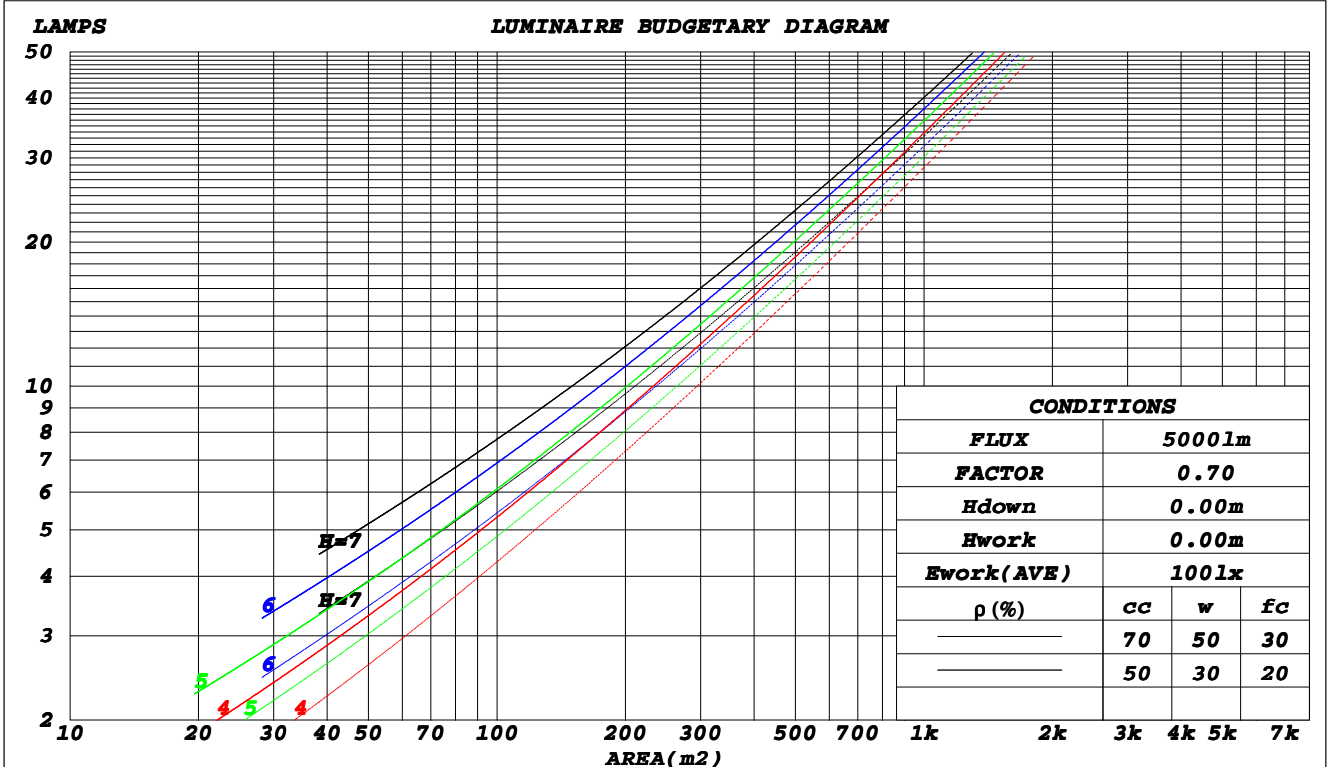

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.340	.193	.061	.331	.189	.060	.315	.181	.058	.301	.173	.056	.287	.166	.054	
2.0	.309	.169	.052	.301	.166	.051	.287	.160	.050	.274	.154	.048	.262	.148	.047	
3.0	.281	.149	.045	.274	.147	.044	.261	.142	.043	.250	.137	.042	.239	.132	.041	
4.0	.256	.133	.039	.250	.131	.039	.239	.127	.038	.229	.123	.037	.219	.119	.036	
5.0	.235	.120	.035	.230	.118	.034	.220	.114	.034	.210	.111	.033	.202	.108	.032	
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.187	.098	.029	
7.0	.201	.100	.028	.197	.098	.028	.189	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.188	.092	.026	.184	.090	.026	.176	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.175	.085	.024	.172	.084	.024	.165	.082	.023	.159	.080	.023	.153	.078	.022	
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.225	.225	.225	.192	.192	.192	.131	.131	.131	.075	.075	.075	.024	.024	.024	
1.0	.217	.190	.166	.185	.163	.143	.127	.112	.099	.073	.065	.058	.023	.021	.019	
2.0	.209	.166	.131	.179	.143	.113	.123	.099	.079	.071	.058	.046	.023	.019	.015	
3.0	.201	.149	.108	.173	.129	.093	.119	.089	.065	.068	.052	.039	.022	.017	.013	
4.0	.194	.136	.092	.166	.118	.080	.114	.082	.056	.066	.048	.033	.021	.016	.011	
5.0	.186	.126	.081	.160	.109	.071	.110	.076	.050	.064	.045	.030	.021	.015	.010	
6.0	.179	.118	.074	.154	.102	.064	.106	.071	.045	.061	.042	.027	.020	.014	.009	
7.0	.172	.111	.068	.148	.096	.059	.102	.067	.042	.059	.040	.025	.019	.013	.008	
8.0	.165	.105	.064	.142	.091	.056	.098	.064	.039	.057	.038	.024	.018	.012	.008	
9.0	.159	.100	.060	.137	.087	.053	.095	.061	.037	.055	.036	.022	.018	.012	.007	
10.0	.153	.096	.058	.132	.083	.050	.092	.059	.036	.053	.035	.021	.017	.011	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.6	24.4	25.9	26.2	22.0	23.5	22.4	23.8	24.1
3H	26.0	27.4	26.4	27.7	28.1	23.2	24.6	23.6	24.9	25.3
4H	26.9	28.2	27.3	28.5	28.9	23.7	25.1	24.1	25.4	25.8
6H	27.6	28.8	28.0	29.2	29.5	24.1	25.4	24.5	25.7	26.1
8H	27.8	29.0	28.2	29.4	29.8	24.3	25.5	24.7	25.8	26.2
12H	28.0	29.2	28.5	29.6	30.0	24.3	25.5	24.8	25.9	26.3
4H 2H	24.6	26.0	25.0	26.3	26.7	23.1	24.4	23.5	24.8	25.1
3H	26.9	28.0	27.3	28.4	28.8	24.6	25.8	25.1	26.2	26.6
4H	27.9	29.0	28.3	29.4	29.8	25.4	26.4	25.8	26.8	27.2
6H	28.8	29.7	29.2	30.1	30.6	25.9	26.9	26.4	27.3	27.8
8H	29.1	30.0	29.6	30.4	30.9	26.2	27.0	26.6	27.5	28.0
12H	29.4	30.2	29.9	30.7	31.2	26.3	27.1	26.8	27.6	28.1
8H 4H	28.2	29.1	28.7	29.5	30.0	26.1	27.0	26.6	27.5	28.0
6H	29.3	30.1	29.8	30.5	31.1	27.1	27.8	27.6	28.3	28.8
8H	29.8	30.5	30.3	31.0	31.5	27.5	28.2	28.1	28.7	29.2
12H	30.2	30.8	30.8	31.3	31.9	27.9	28.4	28.4	29.0	29.5
12H 4H	28.2	29.1	28.7	29.5	30.0	26.3	27.1	26.8	27.6	28.1
6H	29.4	30.1	30.0	30.6	31.1	27.4	28.0	27.9	28.5	29.1
8H	30.0	30.6	30.6	31.1	31.7	27.9	28.5	28.5	29.0	29.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 8859 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 7.6)
 Area: 0.12 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	64	52	45	61	51	44	37
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	69	61	78	68	60	75	66	59	51
1.50	85	74	67	83	73	66	79	71	65	56
2.00	92	82	75	89	81	74	85	78	72	64
2.50	96	87	81	93	86	79	89	82	77	68
3.00	99	92	85	97	90	84	92	86	81	72
4.00	103	97	92	101	95	90	96	91	87	77
5.00	106	101	96	103	98	94	98	94	90	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

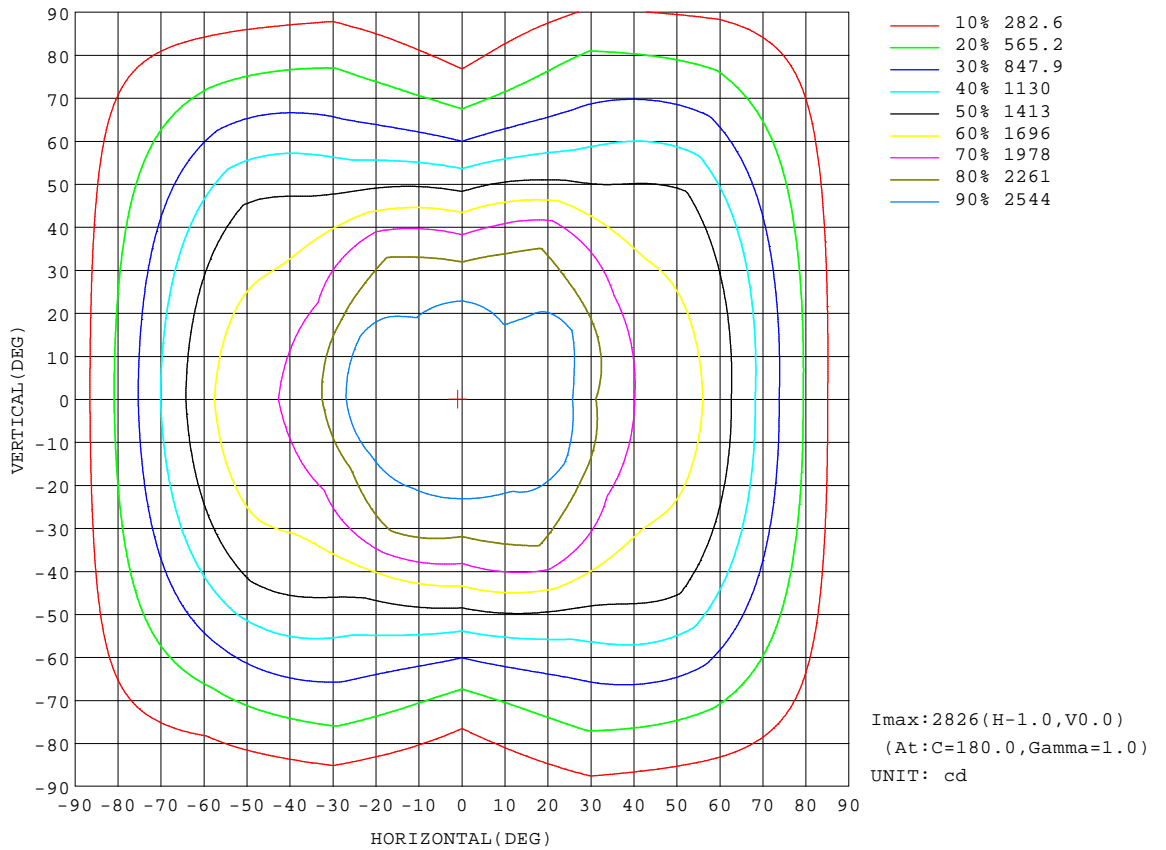


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

Flux out:4836 lm

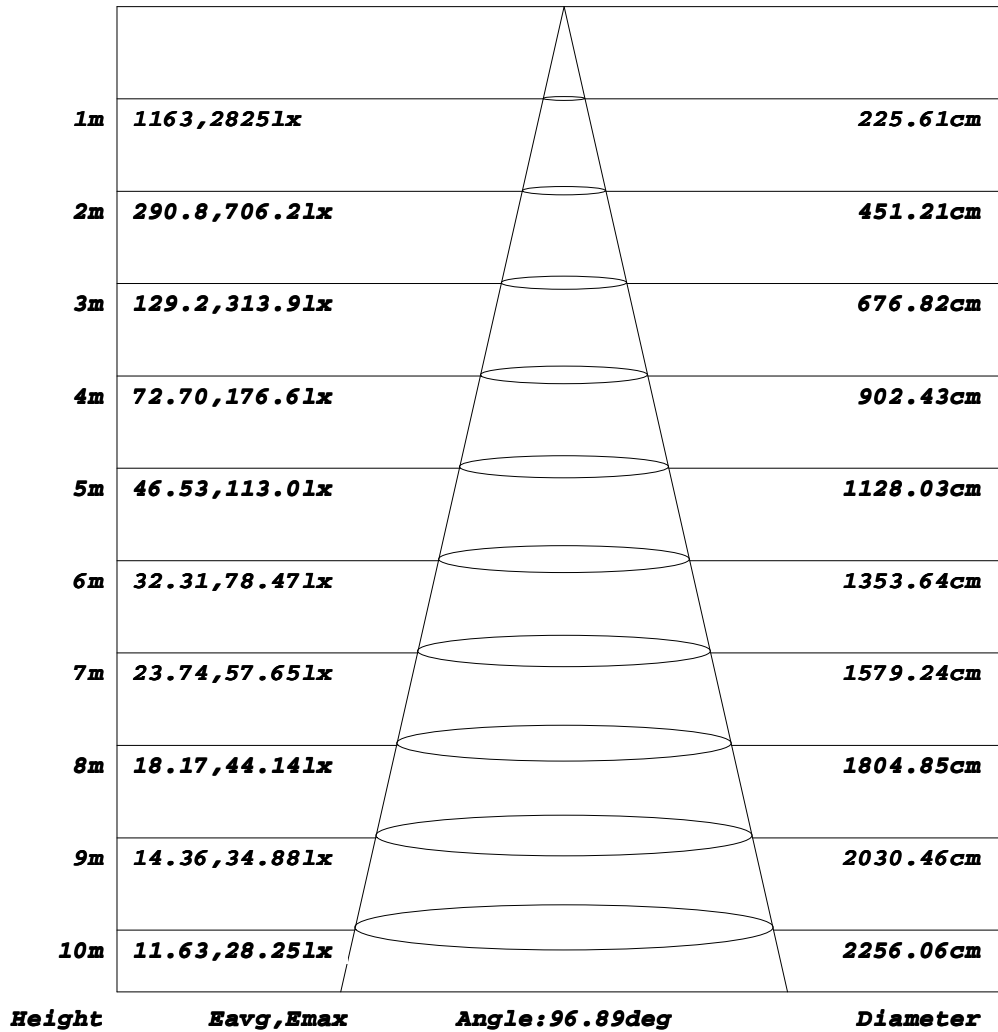


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

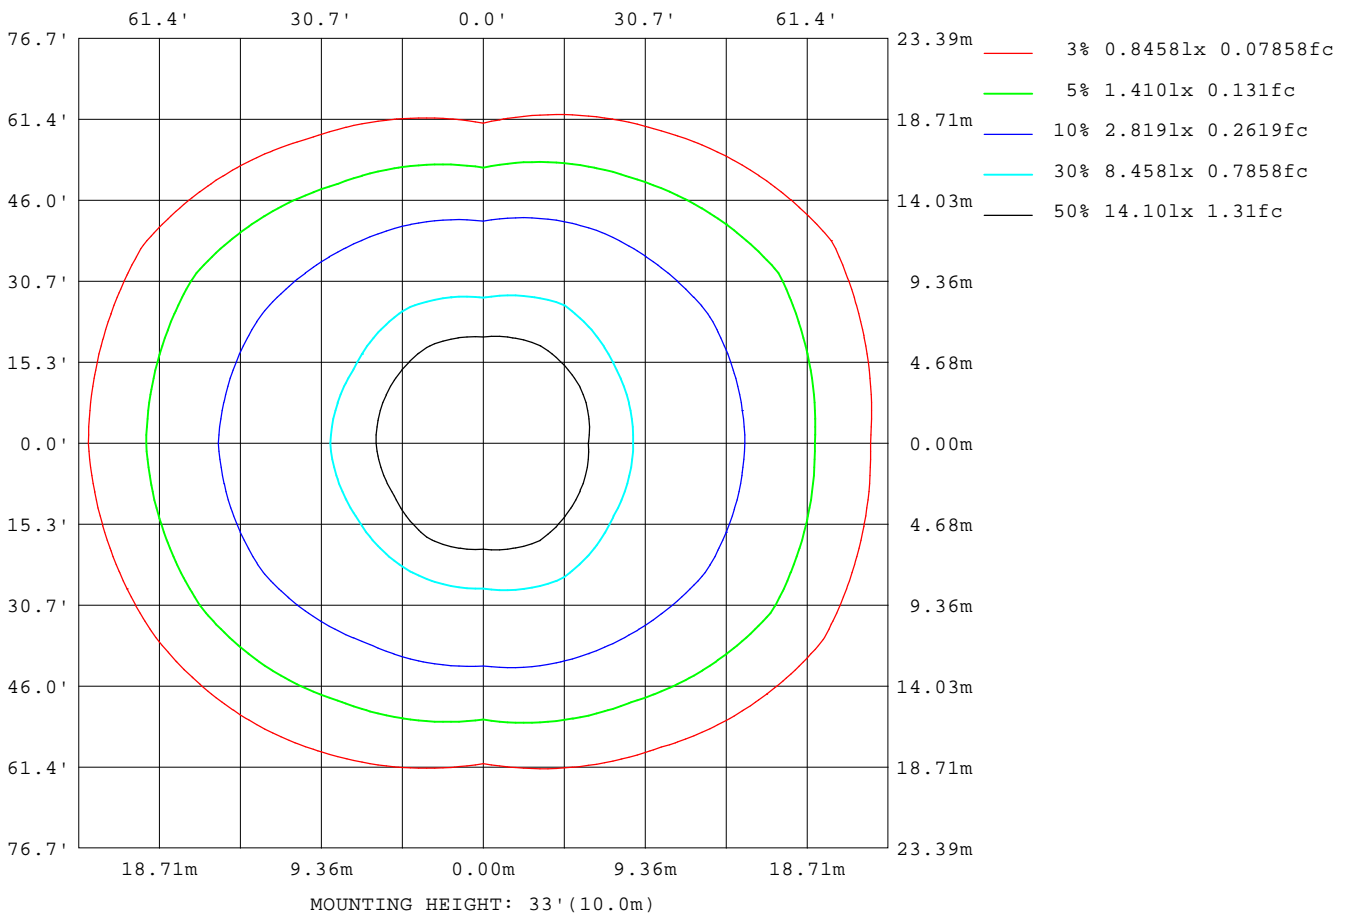

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

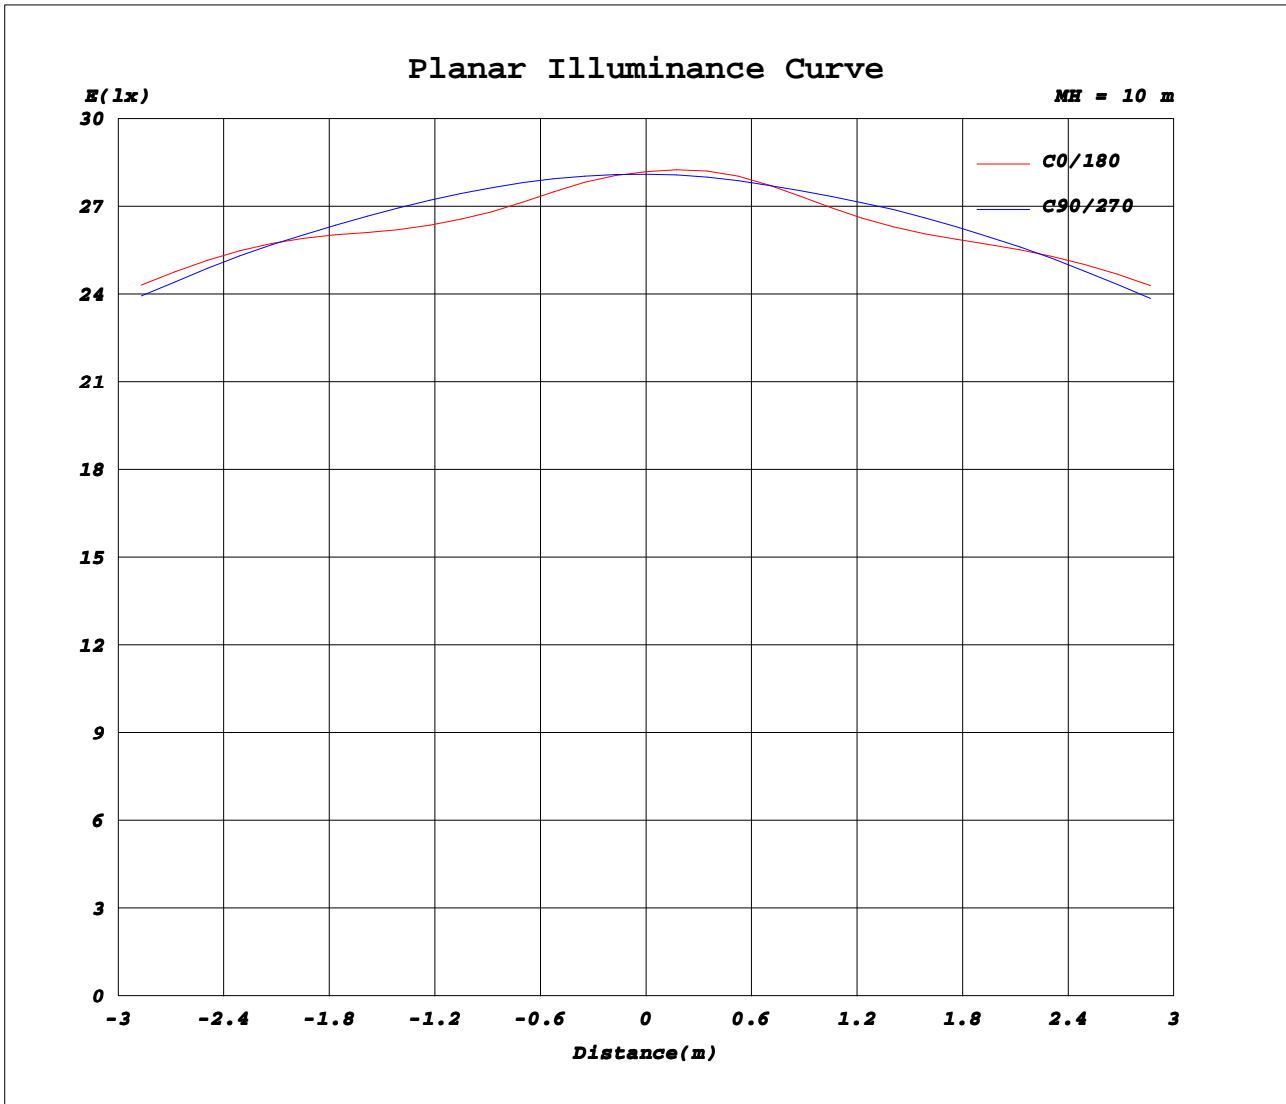

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.2810A P:60.500W PF:0.9720 Freq:50.00Hz		
Lamp Flux:8858.78x1 lm		
Name: NS59-1500MM-60W	Type: LED	
MFR.: Lumega Group	DIM.: 1500*100*75mm	
	SUR.: 1480*80mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2819	2814	2812	2810	2770	2799	2819	2814	2812	2810	2770	2799							
5	2713	2726	2767	2796	2693	2693	2767	2758	2780	2786	2792	2771							
10	2725	2682	2676	2760	2651	2692	2709	2671	2688	2754	2742	2664							
15	2748	2717	2612	2709	2644	2684	2739	2689	2606	2700	2642	2682							
20	2707	2678	2582	2617	2602	2625	2683	2658	2559	2605	2540	2687							
25	2583	2637	2537	2493	2519	2533	2632	2601	2507	2491	2491	2640							
30	2306	2433	2463	2334	2420	2270	2371	2436	2428	2333	2447	2536							
35	2147	2153	2349	2133	2233	2055	2197	2155	2312	2129	2358	2257							
40	1984	1974	2184	1887	1949	1916	2053	1966	2133	1884	2233	2038							
45	1869	1820	1899	1610	1653	1779	1925	1830	1857	1600	2018	1877							
50	1846	1693	1583	1332	1424	1695	1872	1705	1559	1316	1705	1731							
55	1736	1631	1318	1077	1247	1622	1790	1625	1302	1062	1404	1658							
60	1540	1539	1112	853	1087	1458	1602	1532	1105	845	1185	1602							
65	1292	1349	944	652	946	1228	1374	1356	939	654	1014	1452							
70	1040	1095	801	475	811	982	1136	1118	796	480	869	1218							
75	783	844	671	325	661	717	864	869	662	330	750	964							
80	532	595	529	200	486	476	614	609	526	205	627	713							
85	284	355	374	102	309	249	343	373	377	110	472	476							
90	144	178	223	49.3	164	132	176	192	229	55.6	307	250							
95	99.3	109	116	38.7	90.9	94.1	108	116	124	44.2	165	137							
100	86.7	87.8	71.1	35.0	63.1	83.1	91.5	92.3	76.3	40.0	94.6	100							
105	81.8	79.5	52.9	33.2	48.8	76.1	87.1	84.4	57.6	38.0	67.8	87.8							
110	78.9	70.8	41.9	32.2	39.3	68.5	82.2	76.6	46.5	36.7	55.5	80.7							
115	75.4	64.1	35.5	32.2	35.5	62.6	78.6	69.1	40.0	35.9	45.4	72.0							
120	64.4	57.7	35.0	33.0	36.1	56.3	76.0	63.2	39.5	36.5	40.3	65.3							
125	55.3	48.2	36.1	34.4	37.6	48.1	64.0	55.9	40.8	37.9	40.1	56.5							
130	48.7	42.7	37.3	36.3	39.1	44.0	54.7	49.1	42.4	39.8	40.7	48.6							
135	45.0	42.7	39.0	38.9	41.0	44.6	49.6	48.1	44.2	42.1	42.0	45.4							
140	45.8	44.4	41.3	41.7	43.4	46.1	49.2	49.0	46.2	44.6	43.8	46.4							
145	47.4	46.4	43.8	44.6	46.0	48.0	50.2	50.5	48.5	47.2	46.0	48.0							
150	49.4	48.4	46.7	47.5	48.7	49.8	51.6	51.9	50.8	49.8	48.2	49.8							
155	51.2	50.5	49.6	50.3	51.4	51.6	52.8	53.3	53.1	52.3	50.6	51.4							
160	53.3	52.8	52.4	53.0	53.9	53.6	54.1	54.6	55.2	54.5	52.9	53.1							
165	55.6	55.1	55.0	55.3	56.0	55.6	55.8	56.0	57.0	56.4	55.1	54.8							
170	58.0	57.1	57.1	57.3	58.0	57.4	57.7	57.4	58.4	57.8	56.9	56.4							
175	59.8	58.4	58.6	58.8	58.9	58.7	59.1	58.1	59.2	58.7	58.1	57.6							
180	59.7	59.0	59.4	59.1	58.8	58.2	59.9	58.9	59.5	59.0	58.8	58.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: