
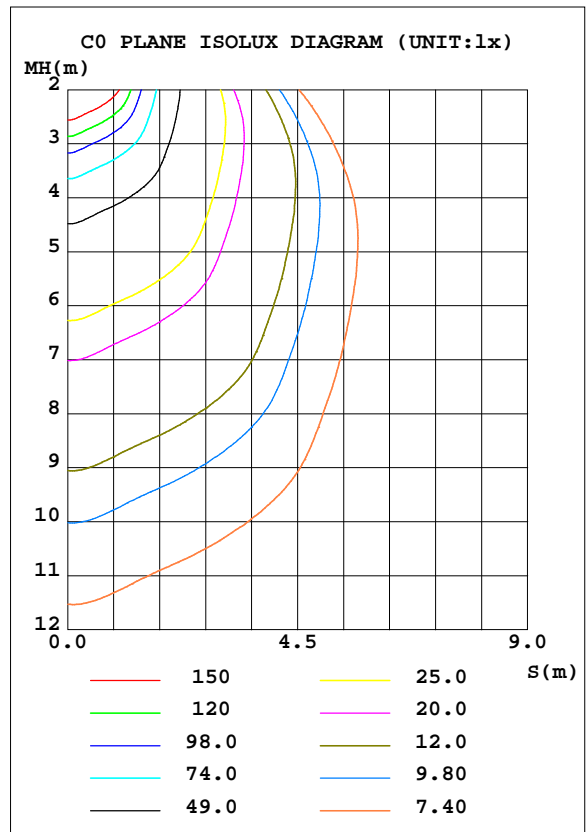


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.00 lm/W			
MODEL		I _{max} (cd)	983.9	S/MH(C0/180)	1.22
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3052.9	η UP, DN(C0-180)	2.5,47.3
NOMINAL FLUX(lm)	3052.9	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.7,47.5
LAMPS INSIDE	1	η up(%)	5.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	94.8	CIBSE SHR MAX	1.35

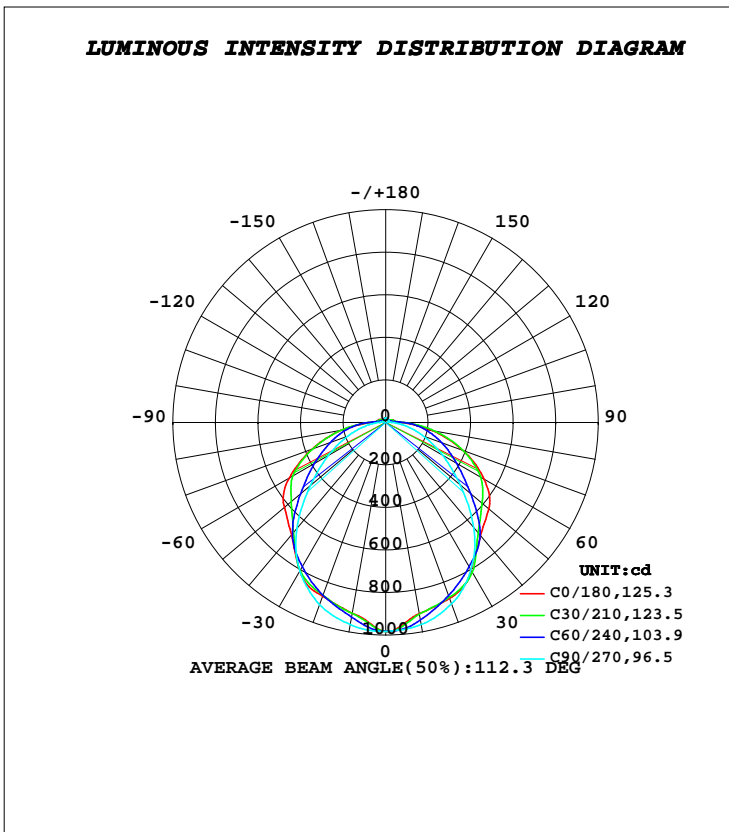

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp	
10	913.0	929.4	964.2	916.6	910.1	920.0	964.7	934.0	0- 10	90.70	90.70	2.97,2.97	
20	879.9	870.2	907.3	861.5	869.1	864.2	911.2	875.0	10- 20	255.1	345.8	11.3,11.3	
30	803.2	799.4	801.1	791.8	806.0	794.4	808.2	806.6	20- 30	388.8	734.6	24.1,24.1	
40	694.7	684.5	644.1	674.4	689.0	678.7	649.7	692.1	30- 40	463.5	1198	39.2,39.2	
50	633.1	557.4	458.7	548.8	621.9	552.3	462.7	566.6	40- 50	474.1	1672	54.8,54.8	
60	534.3	451.2	309.5	445.4	524.3	446.3	312.0	458.2	50- 60	444.1	2116	69.3,69.3	
70	386.8	334.3	189.9	321.1	369.5	321.2	191.1	340.5	60- 70	374.2	2491	81.6,81.6	
80	222.6	210.0	93.82	195.8	213.1	197.0	93.80	214.9	70- 80	264.9	2755	90.3,90.3	
90	74.80	87.38	31.47	76.53	71.00	80.09	32.30	91.30	80- 90	137.8	2893	94.8,94.8	
100	39.32	36.76	14.27	34.06	39.46	36.27	15.97	36.71	90-100	53.04	2946	96.5,96.5	
110	35.04	25.48	12.60	24.66	36.76	26.12	14.43	26.82	100-110	30.03	2976	97.5,97.5	
120	25.51	18.80	12.53	18.38	27.44	19.88	14.17	20.09	110-120	22.26	2999	98.2,98.2	
130	17.88	15.29	13.49	15.07	19.42	16.45	14.96	16.89	120-130	15.76	3014	98.7,98.7	
140	16.18	15.74	15.04	15.66	17.54	16.81	16.26	16.98	130-140	12.36	3027	99.1,99.1	
150	17.26	16.98	16.67	16.98	18.22	17.78	17.53	17.85	140-150	10.56	3037	99.5,99.5	
160	18.52	18.39	18.30	18.39	19.01	18.79	18.75	18.84	150-160	8.316	3046	99.8,99.8	
170	20.00	19.74	19.72	19.74	19.94	19.68	19.66	19.69	160-170	5.428	3051	99.9,99.9	
180	20.39	20.19	20.09	20.18	20.40	20.18	20.09	20.18	170-180	1.907	3053	100,100	
DEG	LUMINOUS INTENSITY:cd									UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

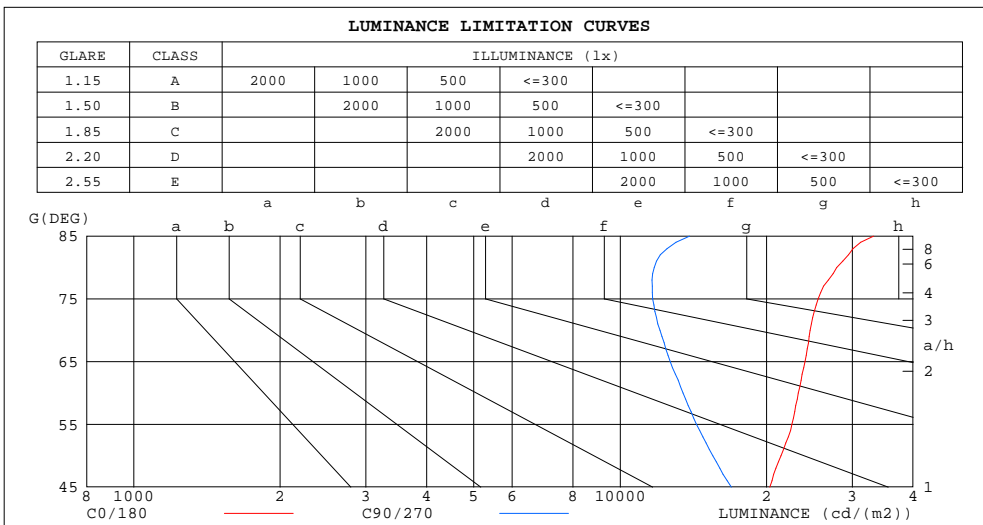

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	33186	13877
80	27864	11745
75	25532	11668
70	24584	12068
65	23992	12677
60	23228	13457
55	22558	14353
50	21411	15513
45	20295	16936


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.95
1.0	1.01	.96	.92	.98	.94	.90	.93	.89	.86	.88	.85	.82	.83	.81	.79	.76
2.0	.87	.80	.73	.85	.78	.72	.80	.75	.70	.76	.71	.67	.72	.68	.65	.62
3.0	.76	.67	.60	.74	.66	.60	.70	.63	.58	.67	.61	.56	.63	.59	.55	.52
4.0	.67	.58	.51	.65	.57	.50	.62	.55	.49	.59	.53	.48	.56	.51	.47	.44
5.0	.60	.51	.44	.58	.50	.43	.56	.48	.42	.53	.46	.41	.51	.45	.40	.38
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.41	.36	.46	.40	.35	.33
7.0	.49	.40	.33	.48	.39	.33	.46	.38	.33	.44	.37	.32	.42	.36	.31	.29
8.0	.44	.36	.30	.43	.35	.30	.42	.34	.29	.40	.33	.29	.38	.33	.28	.26
9.0	.41	.32	.27	.40	.32	.27	.38	.31	.26	.37	.30	.26	.36	.30	.25	.23
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.23	.33	.27	.23	.21

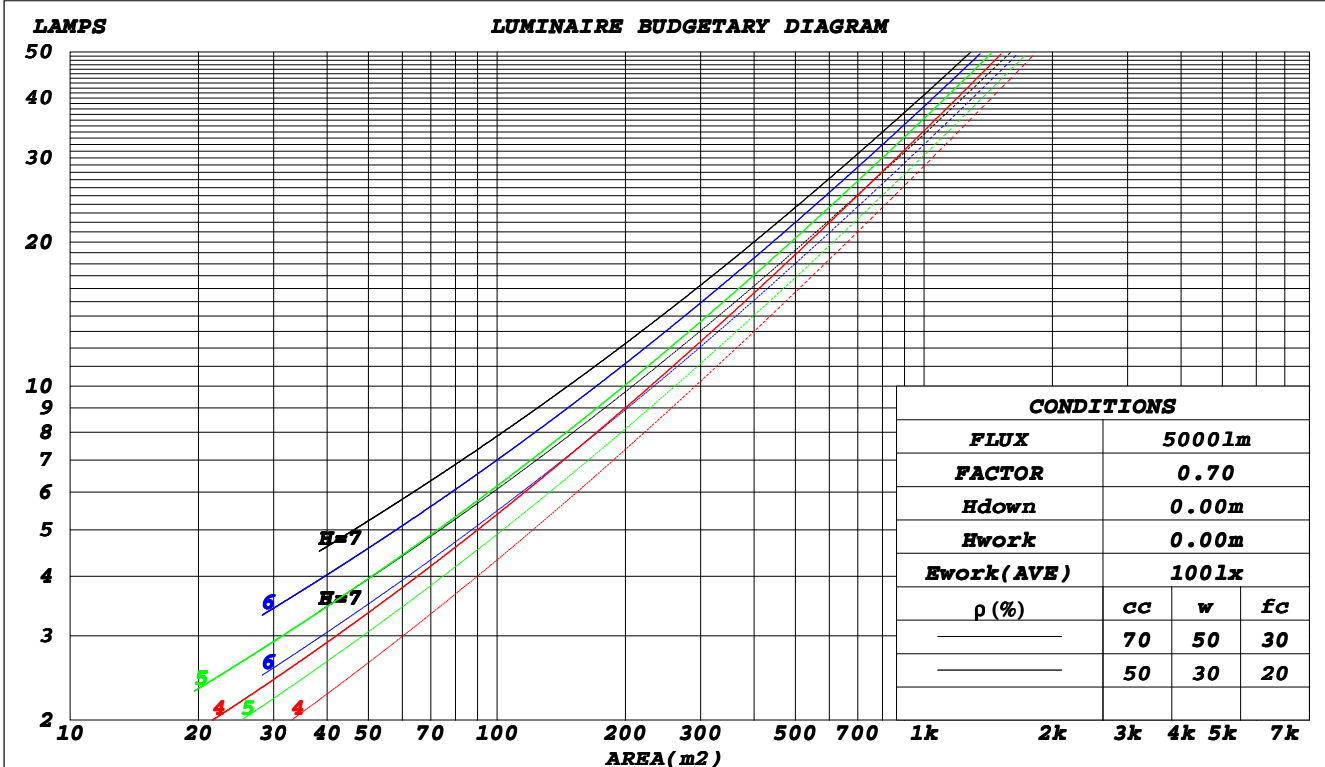

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.347	.197	.062	.338	.193	.061	.321	.184	.059	.306	.177	.057	.292	.170	.055	
2.0	.313	.171	.053	.305	.168	.052	.290	.161	.050	.277	.155	.049	.264	.149	.047	
3.0	.283	.151	.045	.276	.148	.045	.263	.143	.043	.251	.138	.042	.240	.133	.041	
4.0	.258	.134	.039	.252	.132	.039	.240	.127	.038	.229	.123	.037	.219	.119	.036	
5.0	.237	.121	.035	.231	.119	.035	.221	.115	.034	.211	.111	.033	.202	.108	.032	
6.0	.218	.109	.031	.213	.108	.031	.204	.104	.030	.195	.101	.030	.187	.098	.029	
7.0	.202	.100	.028	.198	.098	.028	.189	.096	.028	.181	.093	.027	.174	.090	.027	
8.0	.188	.092	.026	.184	.091	.026	.176	.088	.025	.169	.086	.025	.162	.083	.024	
9.0	.176	.085	.024	.172	.084	.024	.165	.082	.023	.159	.079	.023	.152	.077	.022	
10.0	.165	.079	.022	.162	.078	.022	.155	.076	.021	.149	.074	.021	.143	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.230	.230	.230	.197	.197	.197	.134	.134	.134	.077	.077	.077	.025	.025	.025	
1.0	.223	.196	.172	.191	.168	.148	.131	.116	.102	.075	.067	.059	.024	.022	.019	
2.0	.215	.172	.136	.185	.148	.117	.126	.103	.082	.073	.060	.048	.023	.019	.016	
3.0	.208	.155	.113	.178	.134	.098	.122	.093	.069	.071	.054	.041	.023	.018	.013	
4.0	.200	.142	.098	.172	.123	.085	.118	.086	.060	.068	.050	.035	.022	.016	.012	
5.0	.192	.132	.087	.165	.114	.076	.114	.080	.054	.066	.047	.032	.021	.015	.010	
6.0	.185	.124	.080	.159	.107	.069	.110	.075	.049	.064	.044	.029	.021	.014	.010	
7.0	.178	.117	.074	.153	.101	.064	.106	.071	.046	.061	.042	.027	.020	.014	.009	
8.0	.171	.111	.070	.147	.096	.061	.102	.068	.043	.059	.040	.026	.019	.013	.009	
9.0	.165	.106	.066	.142	.092	.058	.098	.065	.041	.057	.038	.025	.019	.013	.008	
10.0	.159	.102	.064	.137	.088	.056	.095	.062	.039	.056	.037	.024	.018	.012	.008	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.7	25.2	24.0	25.5	25.8	21.6	23.1	22.0	23.4	23.7
3H	25.8	27.2	26.2	27.5	27.9	23.0	24.4	23.4	24.7	25.1
4H	26.8	28.1	27.2	28.4	28.8	23.6	25.0	24.0	25.3	25.7
6H	27.6	28.9	28.0	29.2	29.6	24.2	25.4	24.6	25.8	26.2
8H	28.0	29.2	28.4	29.6	30.0	24.4	25.6	24.8	26.0	26.4
12H	28.3	29.5	28.8	29.9	30.3	24.6	25.7	25.0	26.1	26.5
4H 2H	24.2	25.5	24.6	25.9	26.3	22.7	24.0	23.1	24.4	24.7
3H	26.6	27.8	27.1	28.2	28.6	24.4	25.5	24.8	25.9	26.3
4H	27.8	28.8	28.2	29.3	29.7	25.2	26.2	25.6	26.7	27.1
6H	28.8	29.8	29.3	30.2	30.7	25.9	26.8	26.4	27.3	27.8
8H	29.3	30.2	29.8	30.7	31.2	26.2	27.1	26.7	27.5	28.0
12H	29.7	30.5	30.2	31.0	31.5	26.5	27.3	27.0	27.8	28.3
8H 4H	28.1	29.0	28.6	29.4	29.9	26.0	26.9	26.5	27.3	27.8
6H	29.4	30.2	30.0	30.7	31.2	27.0	27.8	27.5	28.3	28.8
8H	30.1	30.7	30.6	31.3	31.8	27.5	28.2	28.1	28.7	29.3
12H	30.7	31.2	31.2	31.8	32.4	28.0	28.5	28.5	29.1	29.7
12H 4H	28.1	28.9	28.6	29.4	29.9	26.1	27.0	26.7	27.4	28.0
6H	29.5	30.2	30.1	30.7	31.3	27.3	28.0	27.9	28.5	29.1
8H	30.3	30.9	30.8	31.4	32.0	28.0	28.5	28.5	29.1	29.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 3053 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.9)
 Area: 0.046 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	43	35	54	42	35	52	42	35	28
0.80	64	52	44	63	51	44	61	50	44	36
1.00	72	60	53	71	60	52	68	61	51	44
1.25	79	68	60	77	67	59	74	65	58	50
1.50	84	73	66	82	72	65	78	70	64	55
2.00	91	81	74	89	80	73	85	77	71	62
2.50	95	86	80	93	85	78	88	81	76	66
3.00	99	91	84	96	89	83	91	85	80	70
4.00	103	96	91	100	94	89	95	90	86	75
5.00	106	100	95	103	98	93	97	93	89	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

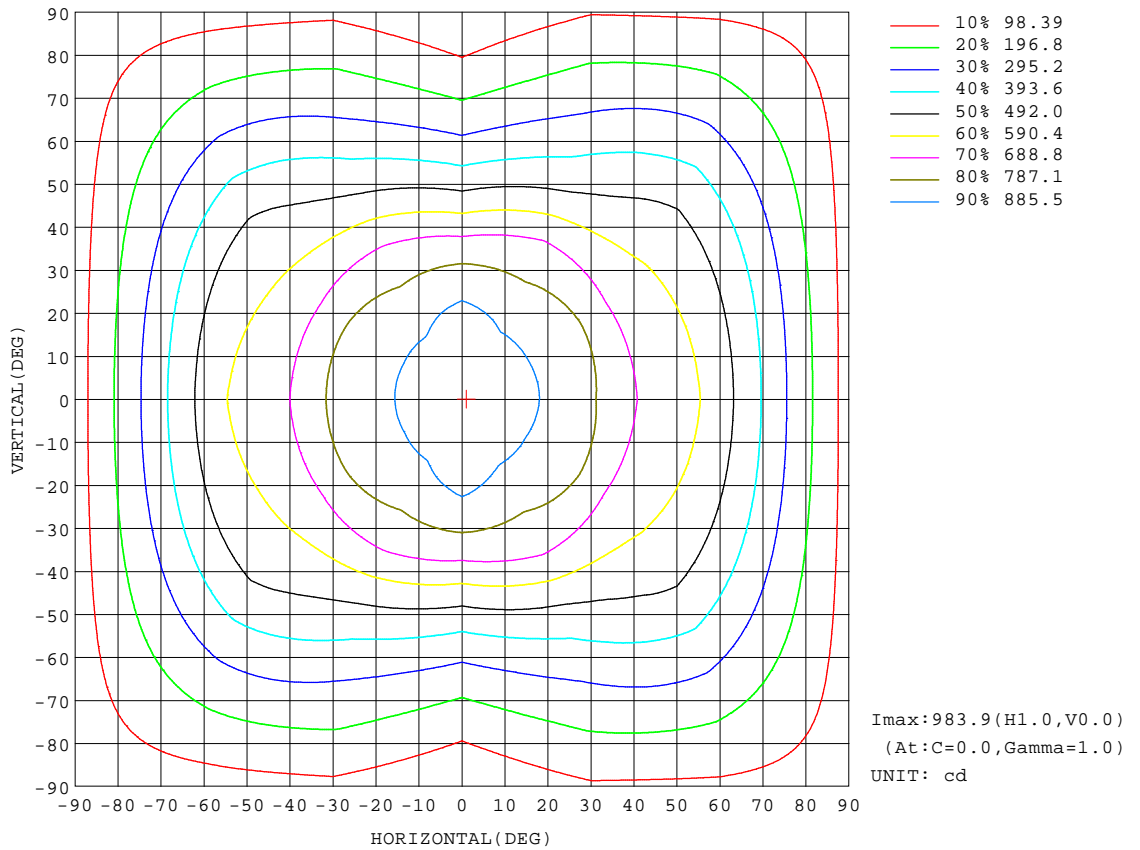


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

Flux out:1626 lm

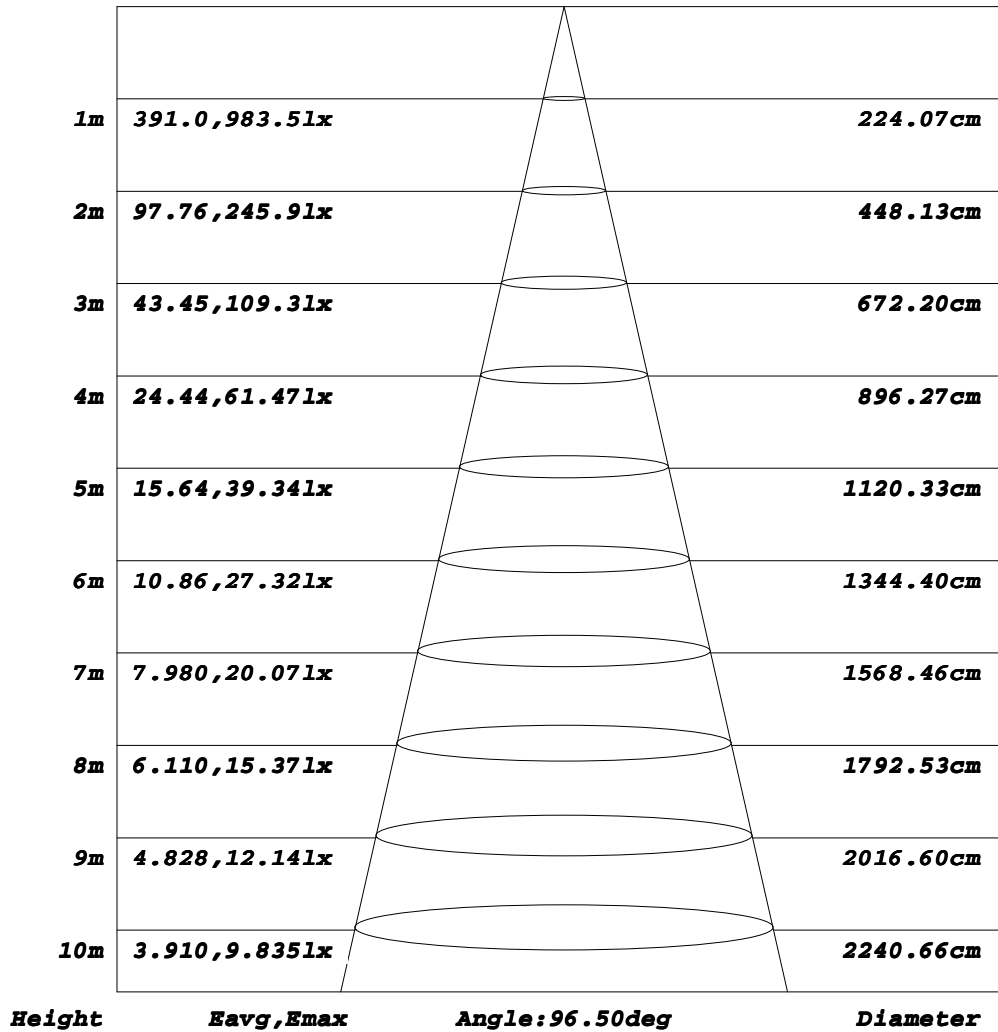


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

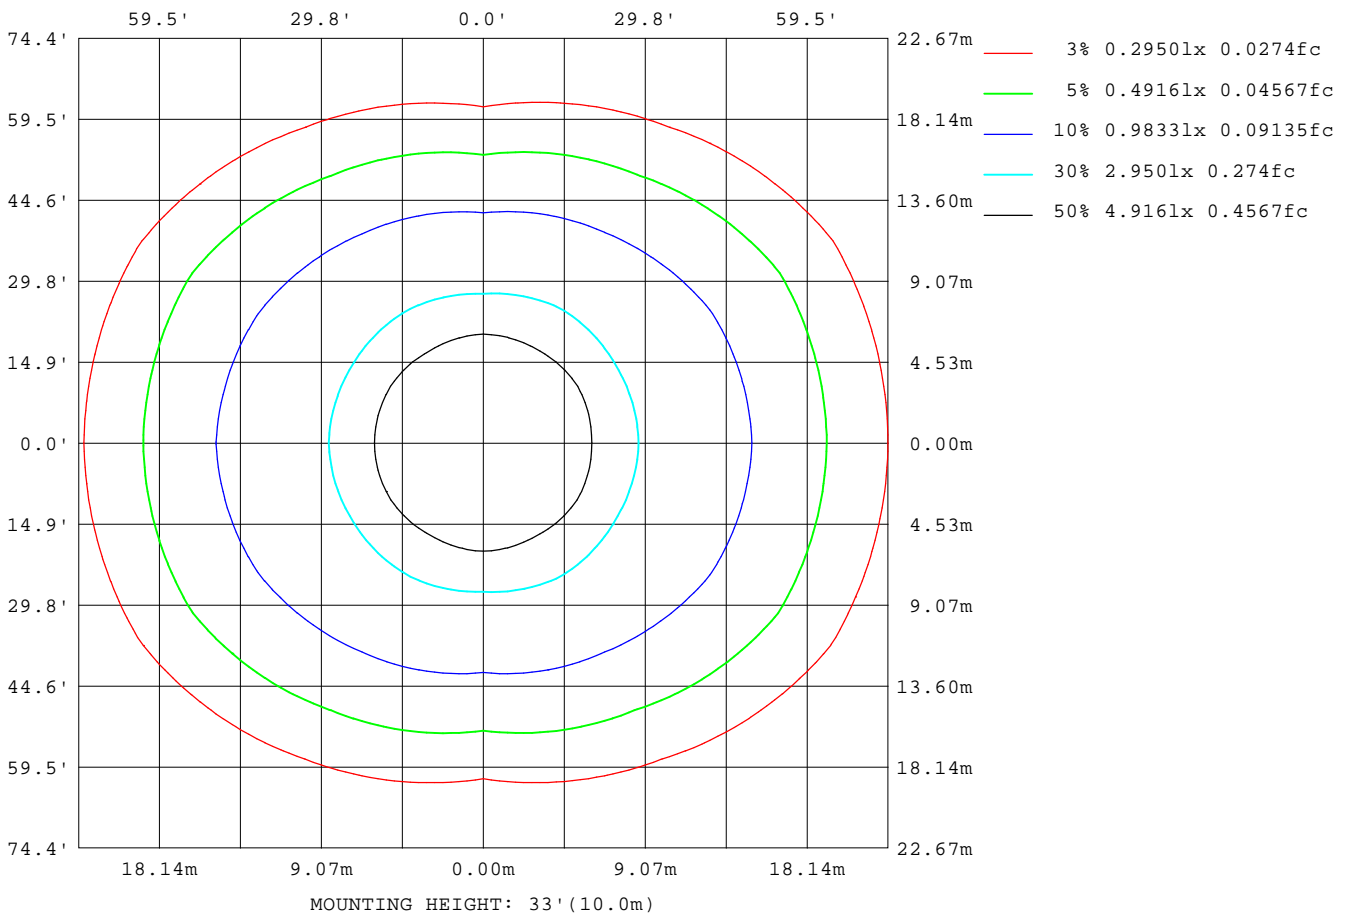

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

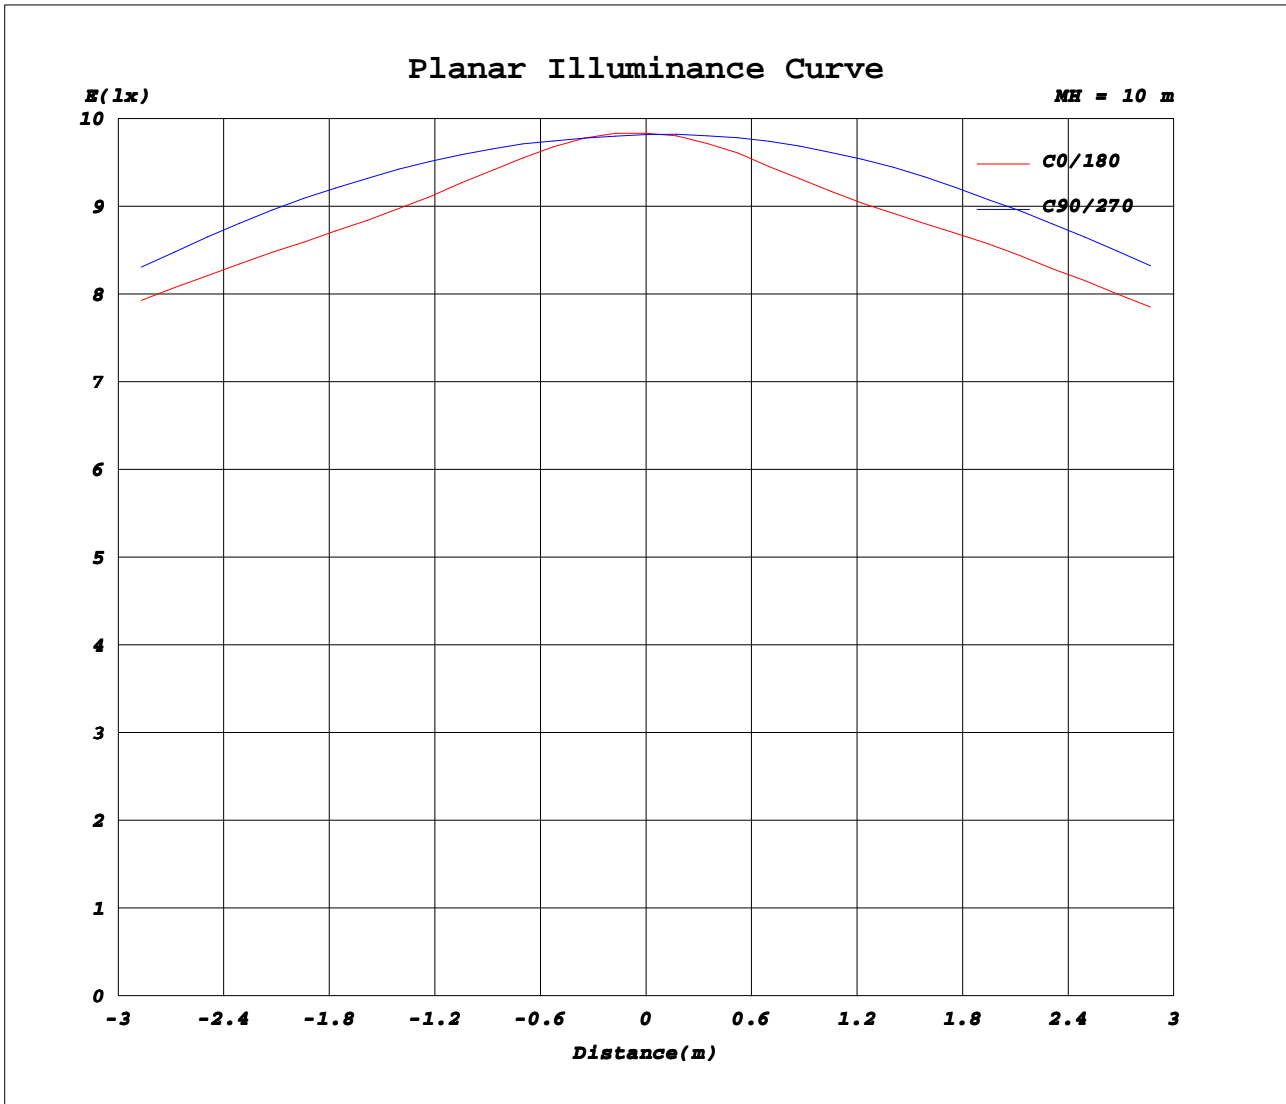

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1000A P:21.200W PF:0.9580 Freq:50.00Hz		
Lamp Flux:3052.9x1 lm		
Name: NS59-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*100*75mm	
	SUR.: 580*80mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	983	982	982	982	981	980	983	982	982	982	981	980							
5	952	959	973	977	960	942	942	946	966	980	980	963							
10	913	916	943	964	926	908	910	911	929	965	948	920							
15	896	894	905	941	893	888	888	889	896	942	908	897							
20	880	875	866	907	861	862	869	864	864	911	872	878							
25	858	853	826	862	822	841	853	842	826	864	833	854							
30	803	815	784	801	780	804	806	805	784	808	793	820							
35	743	742	744	730	736	736	744	739	740	736	752	748							
40	695	678	691	644	676	673	689	675	682	650	700	684							
45	660	631	610	551	596	621	653	621	606	555	624	636							
50	633	592	523	459	517	581	622	581	524	463	536	598							
55	595	557	447	379	448	545	587	544	450	382	456	562							
60	534	517	386	310	388	503	524	505	388	312	394	523							
65	466	456	332	246	331	437	448	440	330	249	339	463							
70	387	388	281	190	279	364	369	365	277	191	287	394							
75	304	311	233	139	231	285	290	288	230	140	240	317							
80	223	234	186	93.8	182	209	213	212	182	93.8	193	237							
85	133	154	137	55.6	130	129	123	134	131	56.4	143	159							
90	74.8	86.7	88.1	31.5	80.0	73.0	71.0	76.5	83.7	32.3	93.2	89.4							
95	49.0	54.4	51.3	23.1	46.0	48.4	48.5	50.7	49.6	24.2	54.0	56.4							
100	39.3	40.7	32.8	14.3	30.6	37.6	39.5	39.6	32.9	16.0	33.0	40.4							
105	35.7	34.9	24.3	13.1	22.9	33.4	36.8	35.0	24.7	15.0	25.4	34.7							
110	35.0	31.7	19.3	12.6	18.4	30.9	36.8	32.3	19.9	14.4	21.4	32.3							
115	30.9	27.7	15.9	12.3	15.4	27.2	32.8	28.5	16.9	14.2	17.9	28.0							
120	25.5	22.9	14.7	12.5	14.4	22.4	27.4	23.9	15.9	14.2	16.5	23.7							
125	21.0	18.7	14.5	12.9	14.3	18.3	22.8	19.8	15.7	14.4	16.2	19.9							
130	17.9	16.1	14.5	13.5	14.3	15.8	19.4	17.2	15.7	15.0	16.1	17.7							
135	16.0	15.7	14.8	14.2	14.6	15.7	17.5	17.0	15.8	15.6	16.2	17.0							
140	16.2	16.1	15.4	15.0	15.3	16.0	17.5	17.2	16.4	16.3	16.6	17.3							
145	16.7	16.6	16.0	15.8	16.0	16.5	17.9	17.6	17.0	16.9	17.1	17.7							
150	17.3	17.2	16.7	16.7	16.8	17.1	18.2	18.0	17.6	17.5	17.6	18.1							
155	17.9	17.8	17.5	17.5	17.6	17.7	18.6	18.4	18.2	18.1	18.2	18.5							
160	18.5	18.5	18.3	18.3	18.4	18.4	19.0	18.8	18.8	18.8	18.8	18.9							
165	19.3	19.2	19.0	19.0	19.1	19.1	19.5	19.3	19.3	19.3	19.3	19.4							
170	20.0	19.8	19.7	19.7	19.8	19.7	19.9	19.7	19.7	19.7	19.6	19.8							
175	20.5	20.2	20.0	20.1	20.2	20.2	20.1	19.9	19.9	19.9	19.8	19.9							
180	20.4	20.2	20.1	20.1	20.1	20.2	20.4	20.2	20.1	20.1	20.1	20.2							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: