
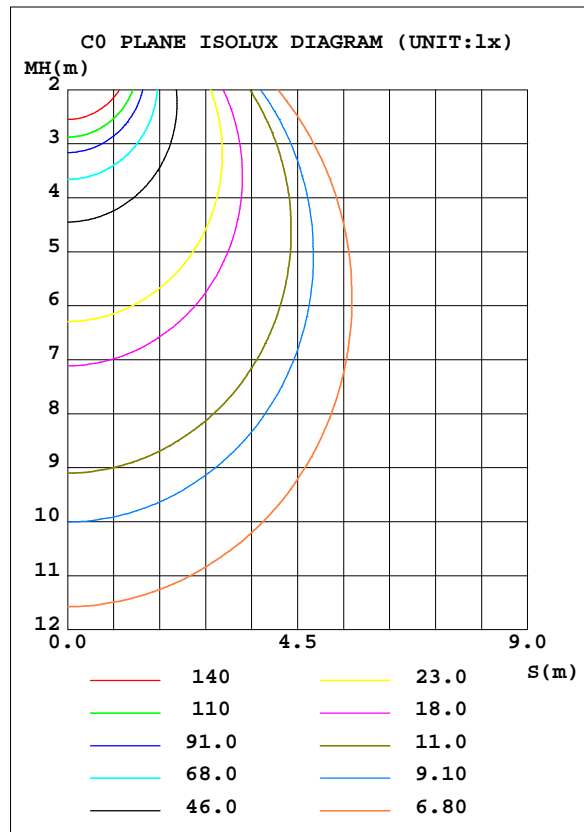


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.20 lm/W			
MODEL		I _{max} (cd)	911.3	S/MH(C0/180)	1.24
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2663.5	η UP, DN(C0-180)	1.1,47.7
NOMINAL FLUX(lm)	2663.49	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,50.1
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

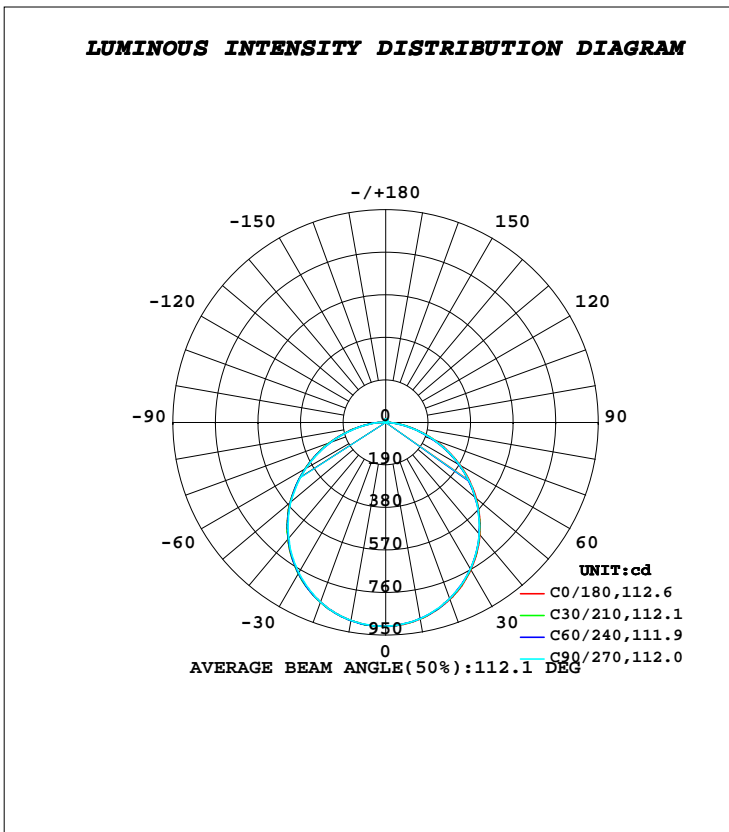

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	891.4	889.2	889.3	892.7	898.8	898.7	896.9	894.0	0- 10	86.11	86.11	3.23,3.23
20	840.3	837.8	837.6	843.4	853.4	853.8	853.1	846.9	10- 20	246.6	332.7	12.5,12.5
30	760.5	757.0	755.8	766.0	779.8	780.1	776.6	770.7	20- 30	373.4	706.1	26.5,26.5
40	654.3	651.6	650.8	663.1	679.1	678.9	674.5	667.0	30- 40	450.1	1156	43.4,43.4
50	528.3	522.1	524.0	537.4	558.6	557.2	554.7	543.5	40- 50	466.6	1623	60.9,60.9
60	386.0	378.7	381.1	394.6	416.5	415.6	412.4	400.8	50- 60	420.5	2043	76.7,76.7
70	235.2	227.6	228.9	244.5	267.2	265.6	262.9	250.8	60- 70	319.8	2363	88.7,88.7
80	93.97	88.77	87.47	102.3	123.4	122.1	117.9	109.4	70- 80	184.0	2547	95.6,95.6
90	5.000	5.246	5.003	6.779	15.82	17.58	16.48	10.97	80- 90	56.94	2604	97.8,97.8
100	6.312	6.270	6.184	6.355	7.579	7.506	7.434	7.454	90-100	7.292	2611	98,98
110	7.511	7.477	7.482	7.535	8.697	8.688	8.653	8.627	100-110	7.926	2619	98.3,98.3
120	8.633	8.623	8.625	8.666	9.760	9.750	9.723	9.686	110-120	8.562	2628	98.7,98.7
130	9.769	9.743	9.767	9.789	10.81	10.77	10.76	10.69	120-130	8.711	2636	99,99
140	10.88	10.88	10.88	10.91	11.80	11.77	11.74	11.69	130-140	8.340	2645	99.3,99.3
150	12.12	12.12	12.10	12.12	12.74	12.76	12.74	12.72	140-150	7.437	2652	99.6,99.6
160	13.33	13.27	13.32	13.25	13.72	13.67	13.75	13.65	150-160	5.992	2658	99.8,99.8
170	13.95	13.99	13.99	13.97	14.23	14.24	14.27	14.23	160-170	3.915	2662	99.9,99.9
180	14.27	14.34	14.32	14.31	14.28	14.33	14.32	14.32	170-180	1.356	2663	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

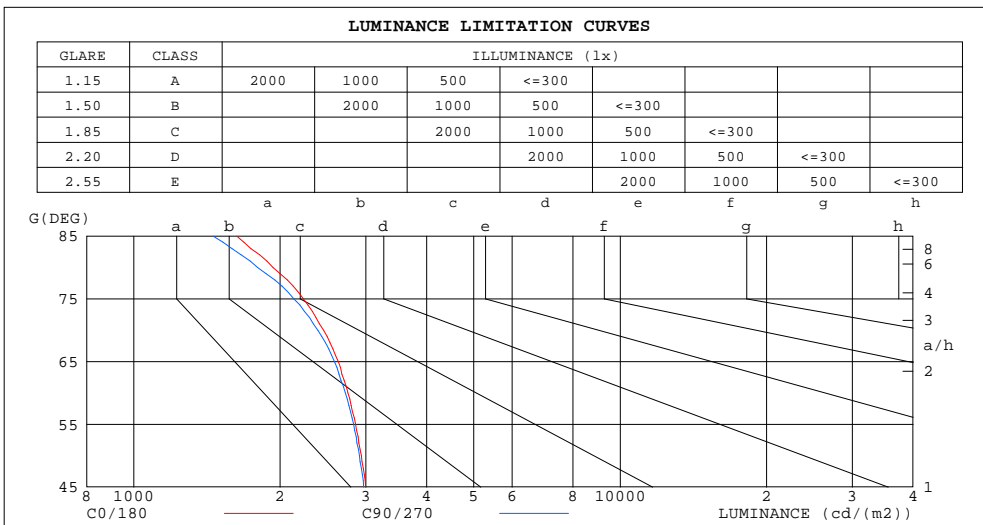

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1630	1457
80	1933	1799
75	2232	2135
70	2456	2390
65	2633	2587
60	2757	2722
55	2858	2831
50	2935	2911
45	2995	2969


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.65	.58	.53	.63	.57	.52	.60	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

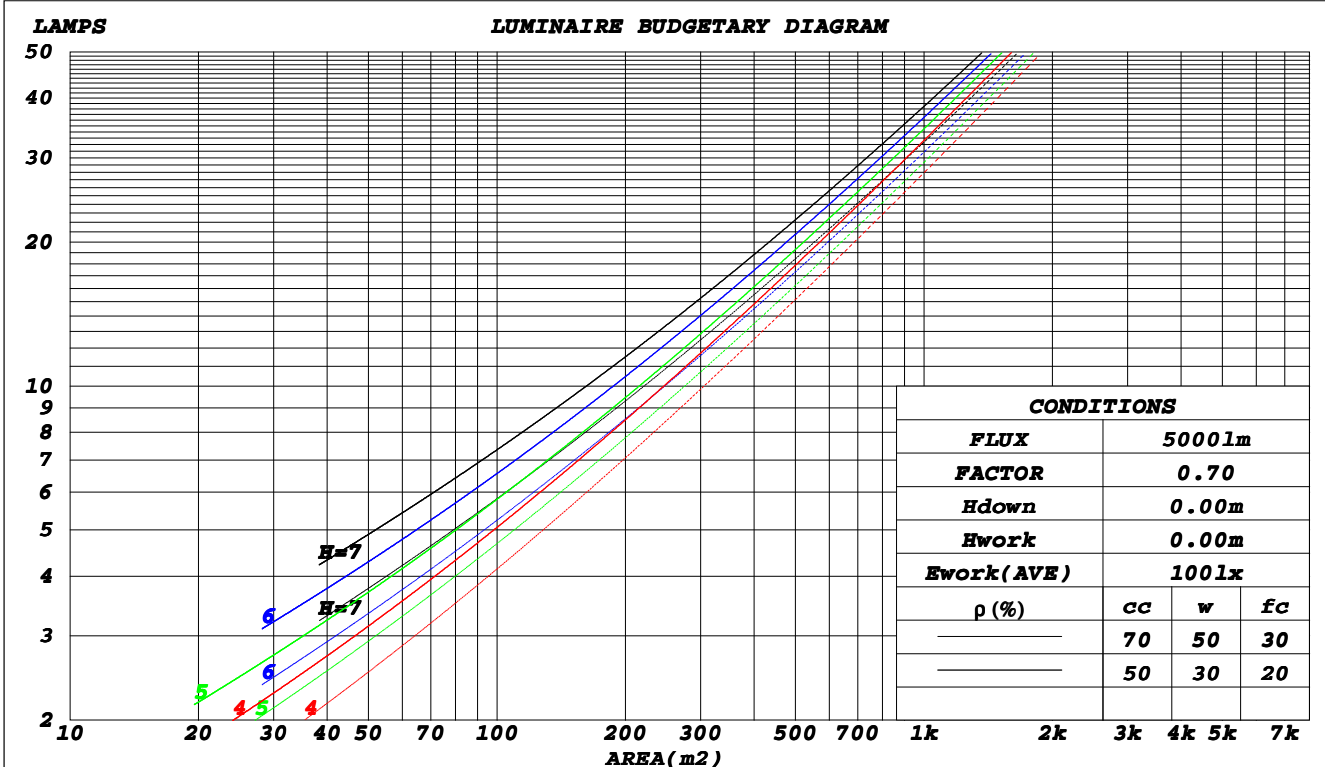

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.173	.055	.290	.166	.053	.276	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.272	.152	.047	.261	.146	.046	.250	.141	.045	
3.0	.270	.144	.043	.264	.141	.043	.252	.137	.042	.242	.133	.041	.232	.128	.040	
4.0	.249	.129	.038	.244	.127	.038	.233	.124	.037	.224	.120	.036	.215	.117	.036	
5.0	.230	.117	.034	.225	.116	.034	.216	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.174	.090	.027	
8.0	.185	.091	.025	.182	.090	.025	.175	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.162	.128	.100	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.174	.118	.076	.150	.102	.066	.103	.071	.046	.059	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.143	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.137	.086	.049	.095	.060	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.056	.031	.053	.033	.019	.017	.011	.006	
8.0	.146	.087	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.140	.082	.043	.121	.071	.037	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.2	17.7	16.5	18.0	18.2	16.2	17.7	16.5	17.9	18.2
3H	17.7	19.1	18.0	19.3	19.6	17.6	19.0	17.9	19.3	19.5
4H	18.2	19.5	18.6	19.8	20.1	18.1	19.4	18.5	19.7	20.0
6H	18.6	19.8	19.0	20.2	20.5	18.5	19.7	18.8	20.0	20.4
8H	18.7	19.9	19.1	20.2	20.6	18.6	19.8	18.9	20.1	20.4
12H	18.8	19.9	19.2	20.3	20.6	18.6	19.8	19.0	20.1	20.4
4H 2H	16.8	18.1	17.1	18.4	18.7	16.8	18.1	17.1	18.4	18.7
3H	18.4	19.6	18.8	19.9	20.2	18.3	19.5	18.7	19.8	20.2
4H	19.1	20.1	19.5	20.5	20.9	19.0	20.0	19.4	20.4	20.8
6H	19.6	20.5	20.0	20.9	21.3	19.4	20.4	19.9	20.8	21.2
8H	19.7	20.6	20.2	21.0	21.4	19.6	20.4	20.0	20.9	21.3
12H	19.8	20.6	20.3	21.1	21.5	19.7	20.5	20.1	20.9	21.3
8H 4H	19.3	20.2	19.7	20.6	21.0	19.2	20.1	19.7	20.5	20.9
6H	19.9	20.6	20.4	21.1	21.6	19.8	20.5	20.3	21.0	21.4
8H	20.1	20.8	20.6	21.3	21.8	20.0	20.6	20.5	21.1	21.6
12H	20.3	20.9	20.8	21.4	21.9	20.1	20.7	20.7	21.2	21.7
12H 4H	19.3	20.1	19.8	20.5	21.0	19.2	20.0	19.7	20.4	20.9
6H	20.0	20.6	20.4	21.1	21.6	19.8	20.5	20.3	20.9	21.4
8H	20.2	20.8	20.7	21.3	21.8	20.1	20.6	20.6	21.1	21.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2663 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
 Area: 0.28 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	63	56	71	64	56	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	70	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

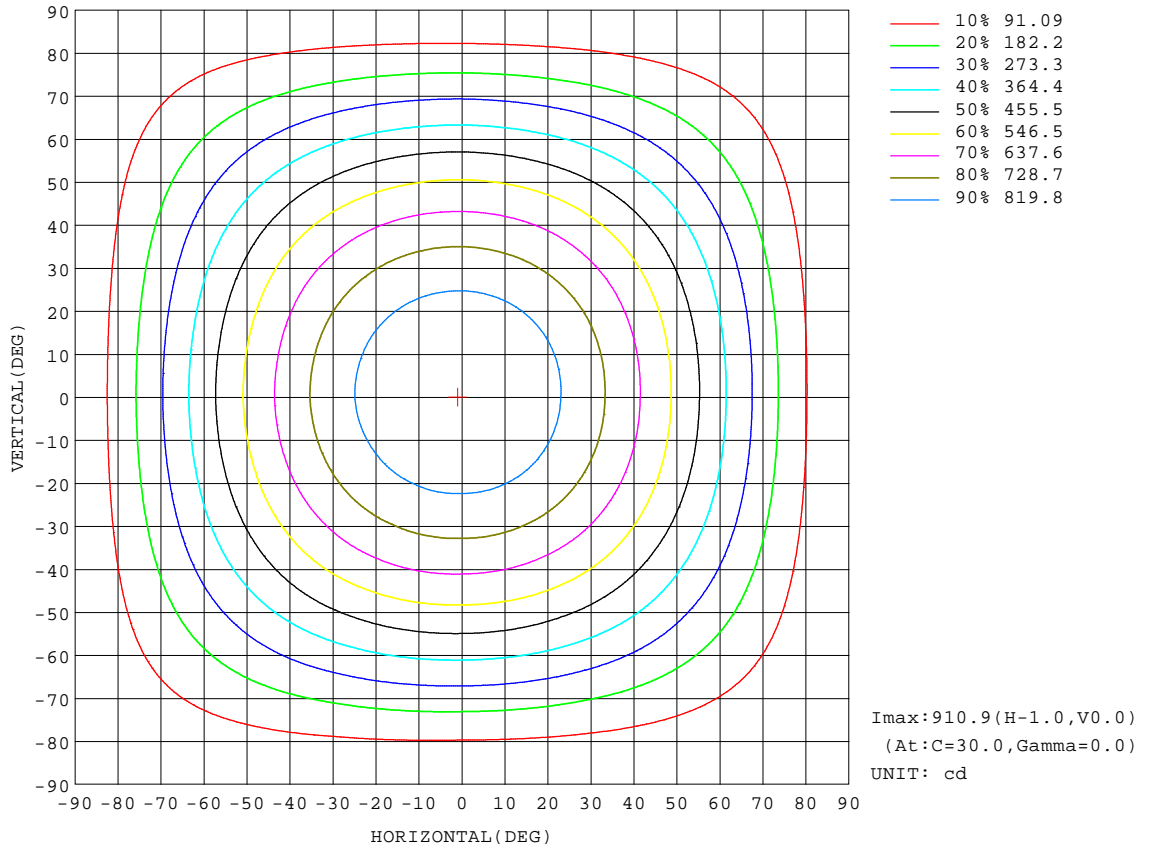


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

Flux out:1884 lm

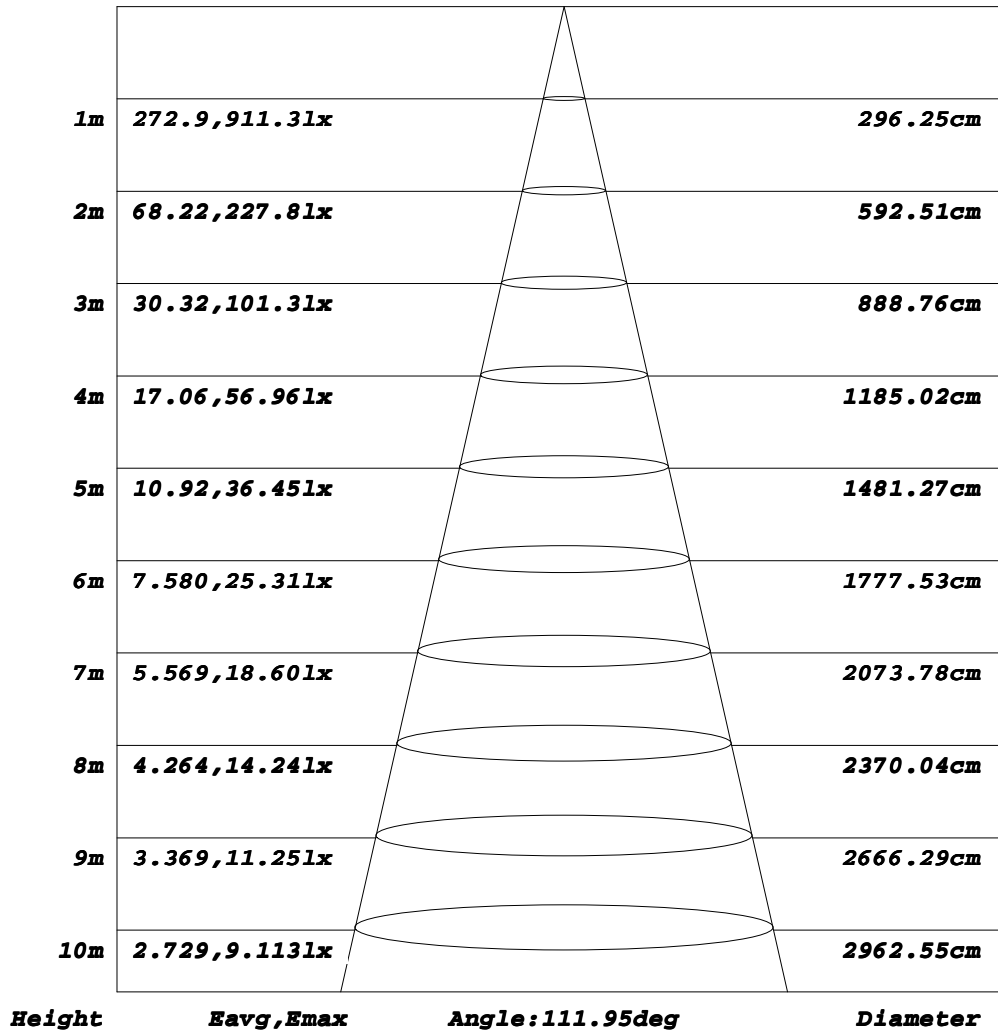


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

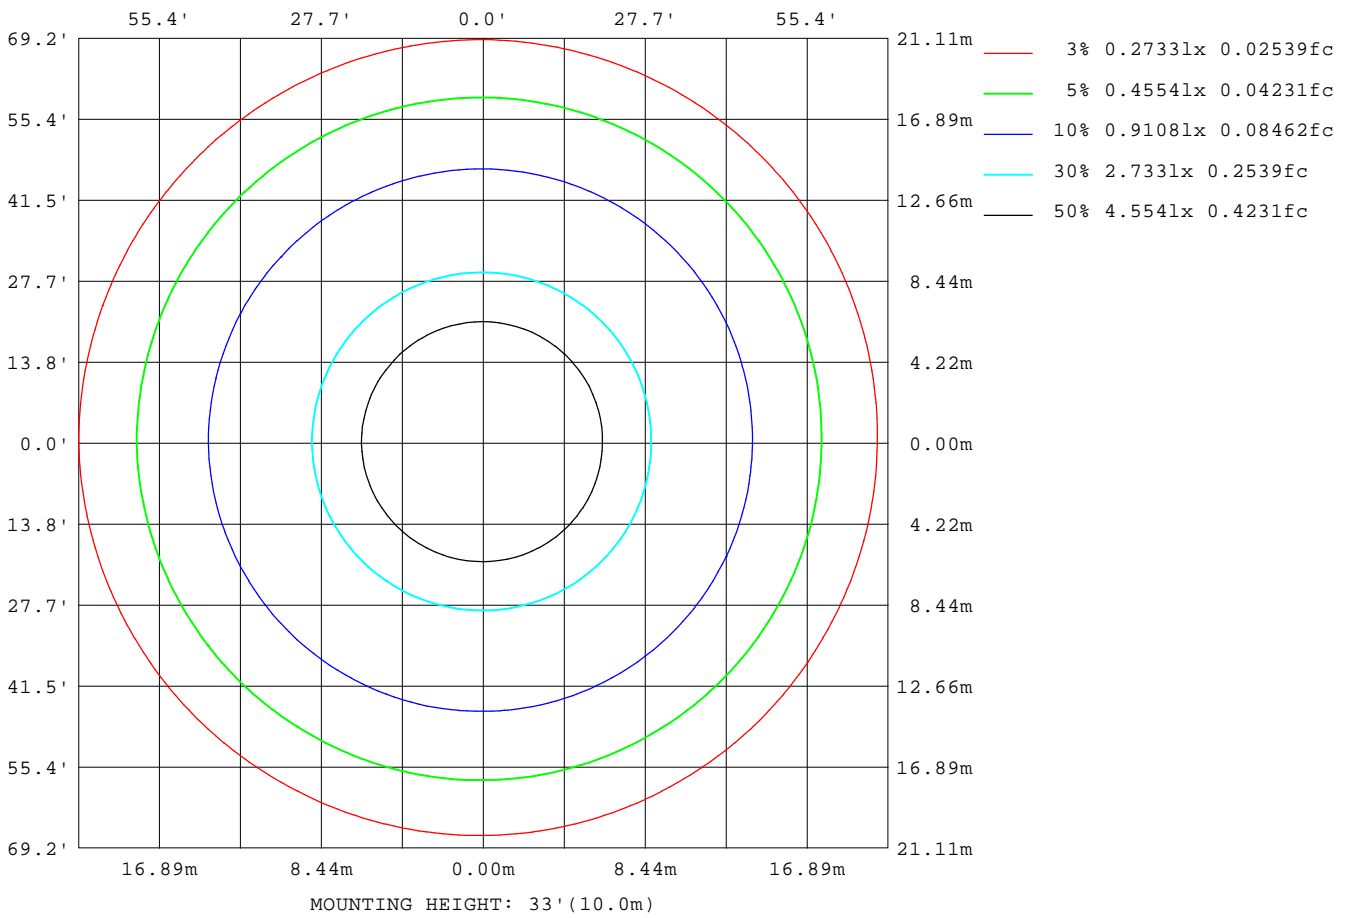

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

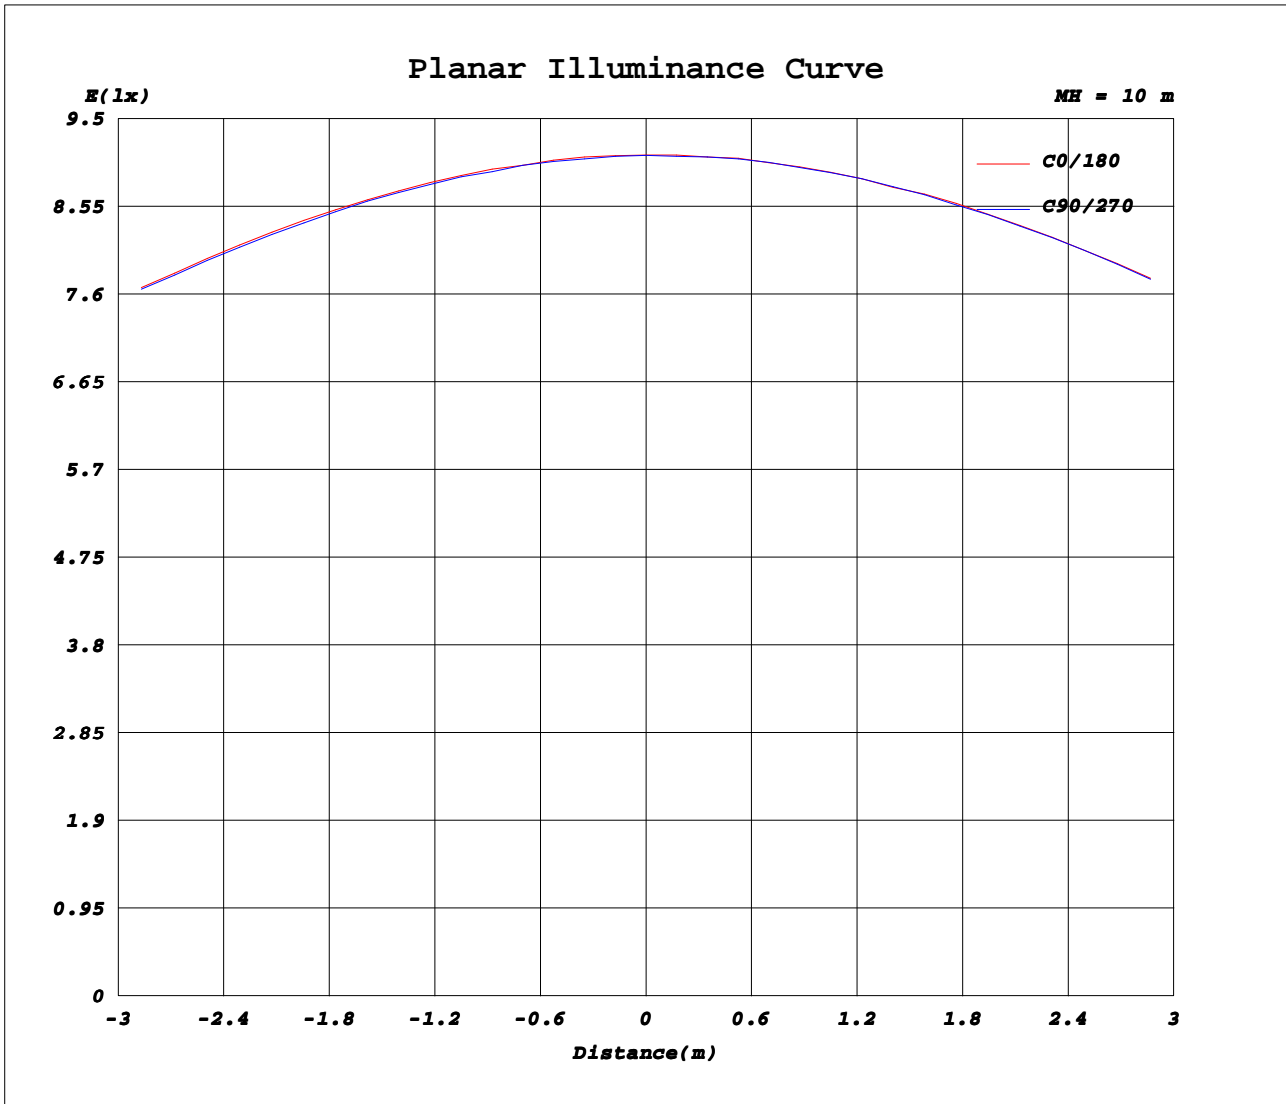

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.0940A P:19.700W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2663.49x1 lm		
Name: NS61-595X595-20W (Sensor)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 530*530mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	911	911	911	910	910	910	911	911	911	910	910	910							
5	906	904	903	903	904	906	908	909	908	907	907	906							
10	891	890	889	889	891	894	899	899	898	897	895	893							
15	869	868	867	866	869	874	880	881	881	879	877	873							
20	840	838	837	838	840	846	853	854	854	853	849	845							
25	805	801	800	800	805	812	819	821	820	818	815	810							
30	760	758	756	756	761	771	780	781	779	777	773	768							
35	710	709	706	706	713	723	732	734	732	729	724	718							
40	654	652	651	651	658	669	679	680	678	674	670	664							
45	593	591	589	588	597	609	621	621	619	616	611	603							
50	528	523	521	524	531	544	559	558	556	555	548	539							
55	459	453	452	455	461	474	488	489	487	484	478	470							
60	386	379	378	381	388	401	416	417	415	412	405	396							
65	312	305	303	306	313	327	343	343	341	339	332	322							
70	235	229	226	229	237	252	267	267	264	263	256	246							
75	162	155	153	155	163	178	193	192	189	188	181	172							
80	94.0	90.1	87.4	87.5	95.3	109	123	123	121	118	113	105							
85	39.8	37.3	35.5	35.6	41.7	51.6	61.6	63.9	63.2	60.8	57.0	50.1							
90	5.00	5.28	5.21	5.00	4.74	8.81	15.8	17.6	17.6	16.5	13.0	8.95							
95	5.64	5.74	5.65	5.50	5.59	6.20	7.05	7.05	6.92	6.87	7.04	6.71							
100	6.31	6.30	6.25	6.18	6.08	6.63	7.58	7.57	7.44	7.43	7.60	7.31							
105	6.95	6.88	6.87	6.87	6.68	7.18	8.16	8.18	8.06	8.06	8.21	7.92							
110	7.51	7.48	7.48	7.48	7.30	7.77	8.70	8.73	8.64	8.65	8.78	8.47							
115	8.06	8.05	8.05	8.05	7.88	8.33	9.21	9.26	9.18	9.18	9.31	9.00							
120	8.63	8.62	8.63	8.63	8.45	8.88	9.76	9.79	9.71	9.72	9.84	9.54							
125	9.19	9.16	9.17	9.19	9.01	9.44	10.3	10.3	10.2	10.2	10.3	10.1							
130	9.77	9.74	9.75	9.77	9.59	9.99	10.8	10.8	10.7	10.8	10.8	10.6							
135	10.3	10.3	10.3	10.3	10.2	10.5	11.3	11.3	11.2	11.2	11.3	11.1							
140	10.9	10.9	10.9	10.9	10.7	11.1	11.8	11.8	11.7	11.7	11.8	11.6							
145	11.5	11.5	11.5	11.5	11.3	11.6	12.3	12.3	12.2	12.2	12.3	12.1							
150	12.1	12.1	12.1	12.1	12.0	12.2	12.7	12.8	12.7	12.7	12.8	12.6							
155	12.8	12.7	12.7	12.8	12.6	12.8	13.2	13.3	13.2	13.3	13.3	13.1							
160	13.3	13.3	13.3	13.3	13.2	13.3	13.7	13.7	13.7	13.8	13.7	13.6							
165	13.7	13.7	13.7	13.8	13.7	13.8	14.0	14.0	14.0	14.1	14.0	13.9							
170	14.0	14.0	14.0	14.0	13.9	14.0	14.2	14.2	14.2	14.3	14.3	14.2							
175	14.1	14.2	14.2	14.2	14.2	14.2	14.3	14.3	14.3	14.3	14.4	14.3							
180	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: