
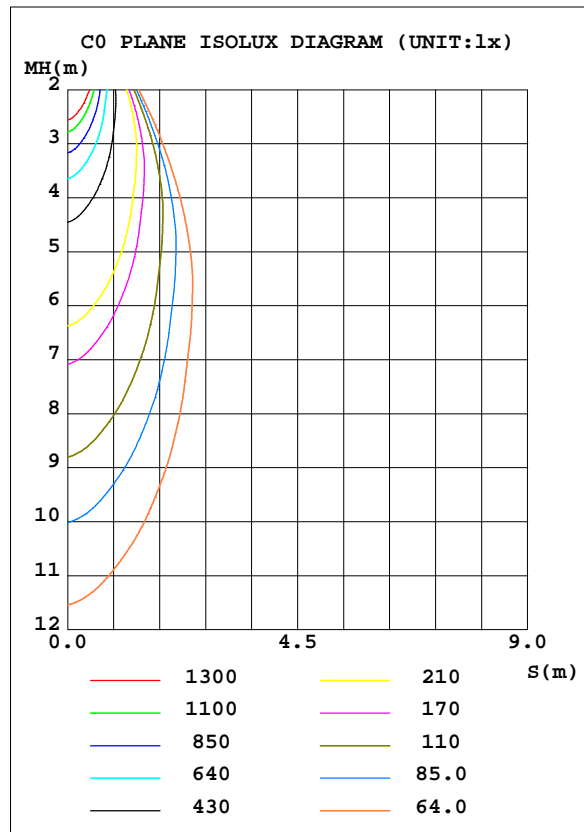


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.80 lm/W			
MODEL		I _{max} (cd)	8576	S/MH(C0/180)	0.53
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3953.5	η UP, DN(C0-180)	1.3, 47.9
NOMINAL FLUX(lm)	3953.49	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.6, 49.2
LAMPS INSIDE	1	η up(%)	2.9	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	97.1	CIBSE SHR MAX	0.65

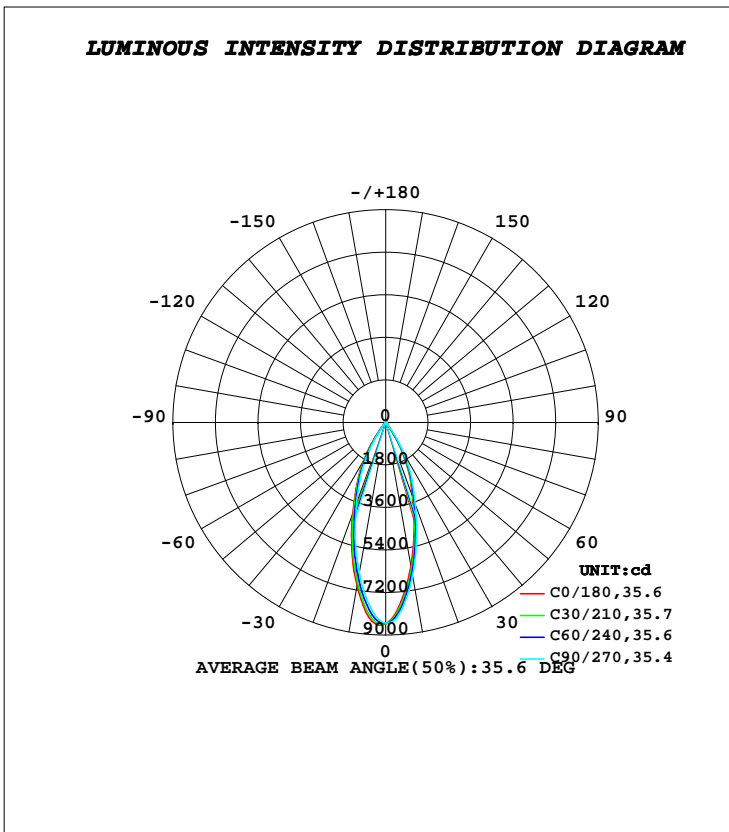

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	6167	6367	6574	6847	7014	6778	6461	6285	0- 10	710.7	710.7	18,18
20	3346	3482	3648	3909	4084	3882	3603	3449	10- 20	1400	2110	53.4,53.4
30	1278	1431	1588	1791	1915	1745	1513	1377	20- 30	1176	3287	83.1,83.1
40	104.5	118.3	143.6	196.3	233.8	191.8	136.3	113.1	30- 40	440.9	3727	94.3,94.3
50	33.51	34.40	36.82	42.52	47.05	44.40	39.91	36.62	40- 50	55.29	3783	95.7,95.7
60	16.63	17.22	18.45	21.06	23.11	21.94	19.89	18.26	50- 60	25.32	3808	96.3,96.3
70	9.152	9.779	10.83	12.80	14.41	14.05	12.88	11.26	60- 70	15.17	3823	96.7,96.7
80	4.195	4.612	5.650	7.871	9.901	10.30	9.631	7.487	70- 80	9.722	3833	97,97
90	1.736	1.067	1.532	3.956	6.431	7.113	6.700	4.799	80- 90	5.114	3838	97.1,97.1
100	3.176	2.331	2.782	5.468	8.227	8.961	8.499	6.459	90-100	5.379	3843	97.2,97.2
110	6.220	5.198	5.478	7.972	10.60	11.38	11.05	9.221	100-110	7.331	3851	97.4,97.4
120	11.39	10.11	10.13	12.33	14.75	15.59	15.47	13.96	110-120	10.40	3861	97.7,97.7
130	19.44	17.98	17.68	19.25	21.13	21.98	22.14	21.20	120-130	14.56	3876	98,98
140	30.31	28.92	28.37	29.12	30.24	31.09	31.59	31.24	130-140	19.14	3895	98.5,98.5
150	40.47	39.77	39.52	39.96	40.62	41.29	41.69	41.33	140-150	22.19	3917	99.1,99.1
160	43.64	44.03	44.51	45.18	45.83	46.37	46.46	45.44	150-160	20.14	3937	99.6,99.6
170	39.38	40.10	40.90	41.99	42.79	42.48	41.70	40.67	160-170	12.42	3950	99.9,99.9
180	38.61	38.58	38.61	38.77	38.88	38.65	38.41	38.44	170-180	3.812	3953	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

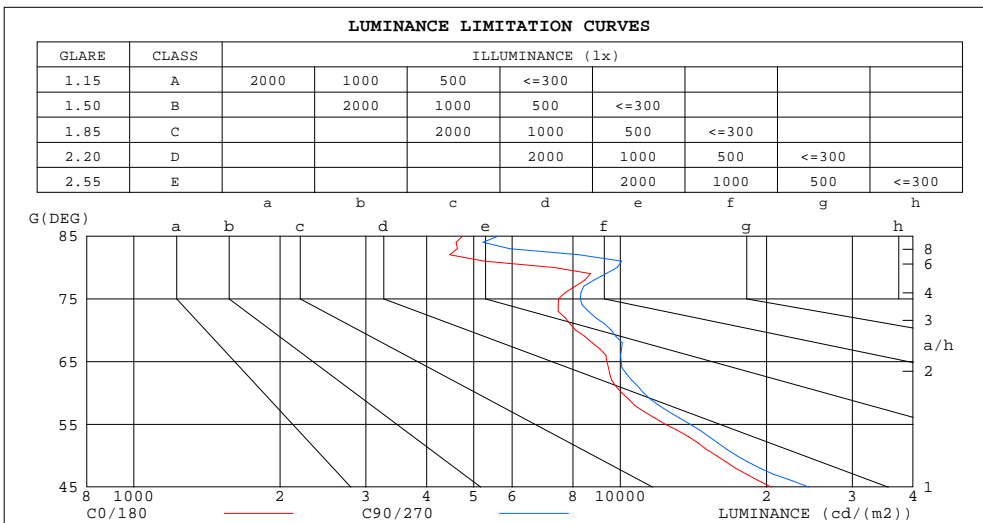

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4739	5606
80	7321	9860
75	7465	8284
70	8109	9595
65	9390	10058
60	10077	11181
55	12395	13948
50	15797	17360
45	20461	24410


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	.98	.98	.97	.96	.95	.94	.92
2.0	1.04	1.00	.97	1.02	.99	.96	.98	.96	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.98	.94	.90	.96	.92	.89	.93	.90	.87	.91	.88	.86	.88	.86	.84	.82
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.83	.81	.85	.82	.80	.78
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.77	.83	.79	.77	.81	.78	.76	.74
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.79	.75	.73	.78	.74	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.77	.73	.70	.76	.72	.69	.75	.71	.69	.67
8.0	.76	.71	.67	.75	.70	.67	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
9.0	.72	.67	.64	.72	.67	.64	.71	.66	.63	.70	.66	.63	.69	.65	.63	.61
10.0	.69	.64	.61	.69	.64	.61	.68	.63	.60	.67	.63	.60	.66	.62	.60	.59

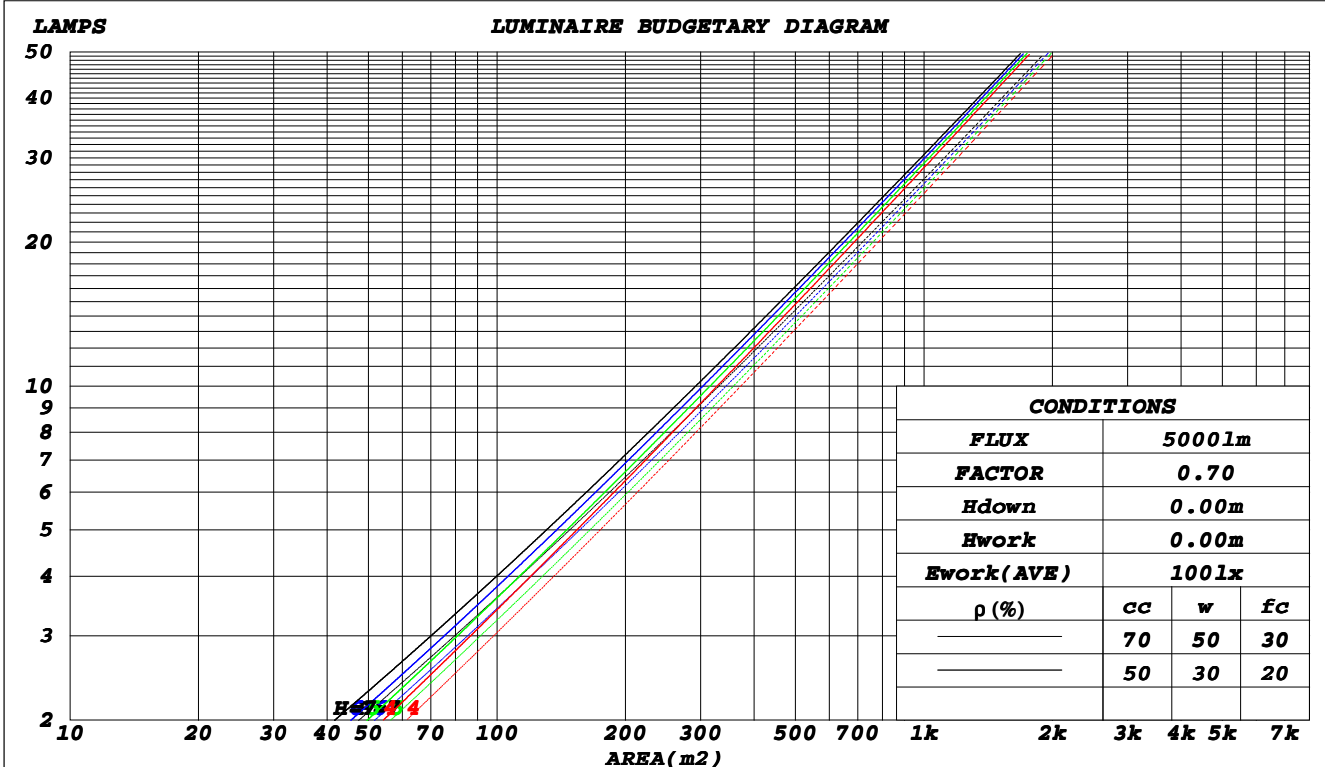

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.165	.094	.030	.157	.090	.028	.143	.082	.026	.130	.075	.024	.118	.068	.022	
2.0	.155	.085	.026	.148	.082	.025	.136	.076	.024	.125	.070	.022	.115	.065	.021	
3.0	.146	.078	.023	.140	.075	.023	.130	.071	.021	.121	.066	.020	.112	.062	.019	
4.0	.138	.072	.021	.133	.070	.021	.124	.066	.020	.116	.062	.019	.108	.059	.018	
5.0	.131	.067	.019	.127	.065	.019	.119	.062	.018	.112	.059	.018	.105	.056	.017	
6.0	.125	.062	.018	.121	.061	.018	.114	.058	.017	.108	.056	.016	.102	.053	.016	
7.0	.119	.059	.017	.116	.058	.016	.109	.055	.016	.104	.053	.015	.098	.051	.015	
8.0	.114	.055	.016	.111	.054	.015	.105	.053	.015	.100	.051	.015	.095	.049	.014	
9.0	.109	.053	.015	.106	.052	.015	.101	.050	.014	.097	.048	.014	.092	.047	.014	
10.0	.104	.050	.014	.102	.049	.014	.098	.048	.013	.093	.046	.013	.089	.045	.013	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.193	.180	.168	.165	.154	.145	.113	.106	.100	.065	.061	.058	.021	.020	.019	
2.0	.177	.155	.137	.151	.134	.119	.104	.092	.083	.060	.054	.048	.019	.017	.016	
3.0	.163	.136	.115	.140	.117	.099	.096	.082	.070	.056	.048	.041	.018	.015	.013	
4.0	.152	.121	.098	.131	.105	.085	.090	.073	.060	.052	.043	.035	.017	.014	.012	
5.0	.143	.110	.085	.123	.095	.074	.085	.066	.052	.049	.039	.031	.016	.013	.010	
6.0	.135	.100	.075	.116	.087	.065	.080	.061	.046	.046	.036	.027	.015	.012	.009	
7.0	.128	.092	.067	.110	.080	.058	.076	.056	.041	.044	.033	.025	.014	.011	.008	
8.0	.122	.086	.061	.105	.075	.053	.073	.052	.038	.042	.031	.022	.014	.010	.007	
9.0	.117	.081	.056	.101	.070	.049	.070	.049	.035	.041	.029	.021	.013	.010	.007	
10.0	.112	.076	.052	.097	.066	.045	.067	.047	.032	.039	.027	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.7	19.6	19.0	19.8	20.0	20.2	21.0	20.4	21.2	21.4
3H	18.7	19.4	19.0	19.7	19.9	20.1	20.8	20.4	21.1	21.3
4H	18.6	19.3	19.0	19.6	19.9	20.0	20.7	20.3	21.0	21.3
6H	18.6	19.3	18.9	19.6	19.9	20.0	20.6	20.3	20.9	21.2
8H	18.6	19.2	18.9	19.5	19.8	20.0	20.6	20.3	20.9	21.2
12H	18.5	19.1	18.9	19.5	19.8	19.9	20.5	20.3	20.8	21.2
4H 2H	18.5	19.3	18.9	19.5	19.8	19.9	20.6	20.3	20.9	21.2
3H	18.5	19.1	18.9	19.4	19.8	19.9	20.5	20.2	20.8	21.1
4H	18.5	19.0	18.9	19.4	19.7	19.8	20.4	20.2	20.7	21.1
6H	18.5	19.0	18.9	19.3	19.7	19.8	20.3	20.2	20.7	21.1
8H	18.4	18.9	18.9	19.3	19.7	19.8	20.2	20.2	20.6	21.1
12H	18.4	18.8	18.8	19.2	19.7	19.7	20.2	20.2	20.6	21.0
8H 4H	18.4	18.8	18.8	19.2	19.6	19.7	20.2	20.1	20.6	21.0
6H	18.4	18.8	18.9	19.2	19.7	19.7	20.1	20.2	20.5	21.0
8H	18.4	18.7	18.8	19.2	19.7	19.7	20.0	20.2	20.5	21.0
12H	18.3	18.6	18.8	19.1	19.6	19.6	19.9	20.2	20.4	20.9
12H 4H	18.3	18.7	18.8	19.2	19.6	19.6	20.1	20.1	20.5	20.9
6H	18.3	18.7	18.8	19.1	19.6	19.7	20.0	20.1	20.5	21.0
8H	18.3	18.6	18.8	19.1	19.6	19.6	19.9	20.1	20.4	20.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.0 / - 2.6					+ 4.2 / - 3.7				
1.5H	+ 5.0 / - 2.2					+ 6.5 / - 3.2				
2.0H	+ 1.4 / - 1.0					+ 1.7 / - 0.8				

CIE Pub.117, 3953 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.8)
 Area: 0.0033 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	87	82	78	87	81	78	75
0.80	95	90	86	94	89	86	93	88	85	82
1.00	99	94	90	98	93	90	96	93	89	85
1.25	103	98	95	102	97	94	99	96	93	89
1.50	106	101	98	104	100	97	102	98	96	91
2.00	108	104	101	106	103	100	103	100	98	92
2.50	110	106	103	108	104	102	104	102	100	93
3.00	111	108	105	109	106	104	105	103	101	94
4.00	113	110	108	111	109	107	107	105	104	96
5.00	114	112	110	112	110	109	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

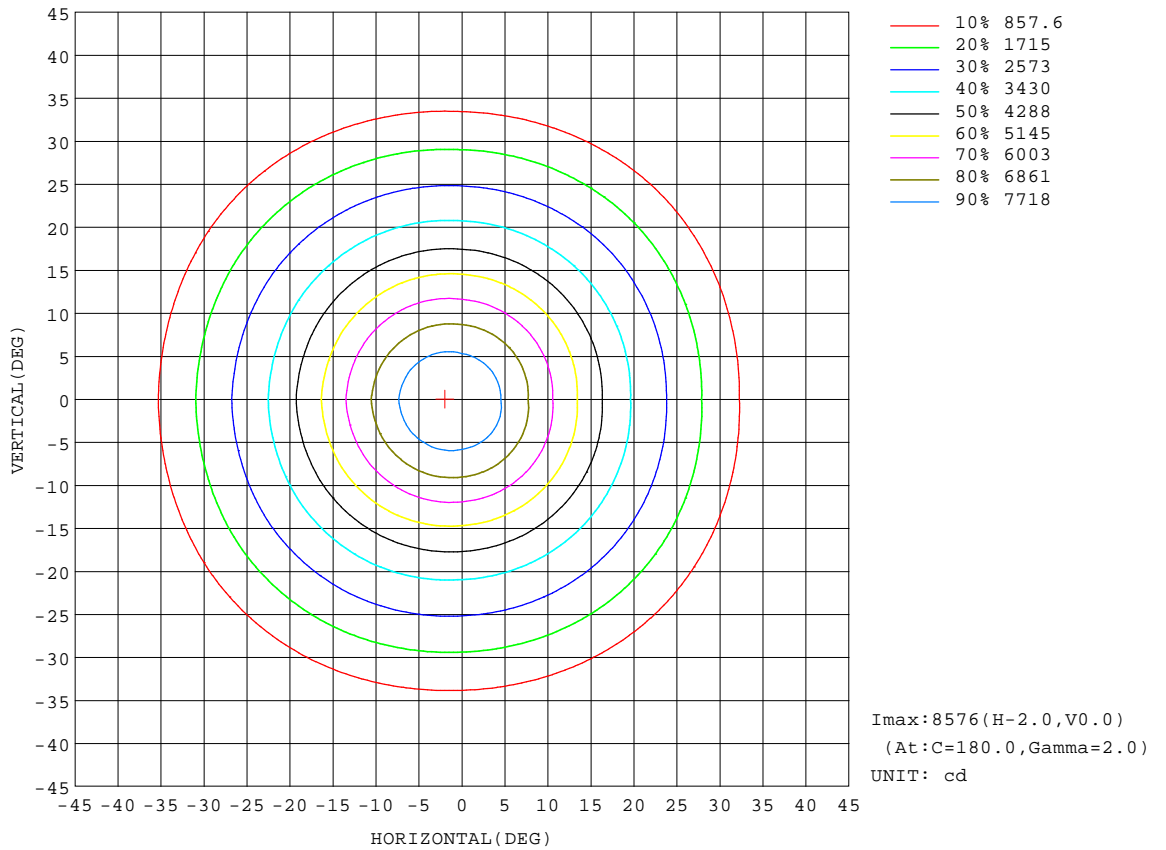


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Flux out:1829 lm

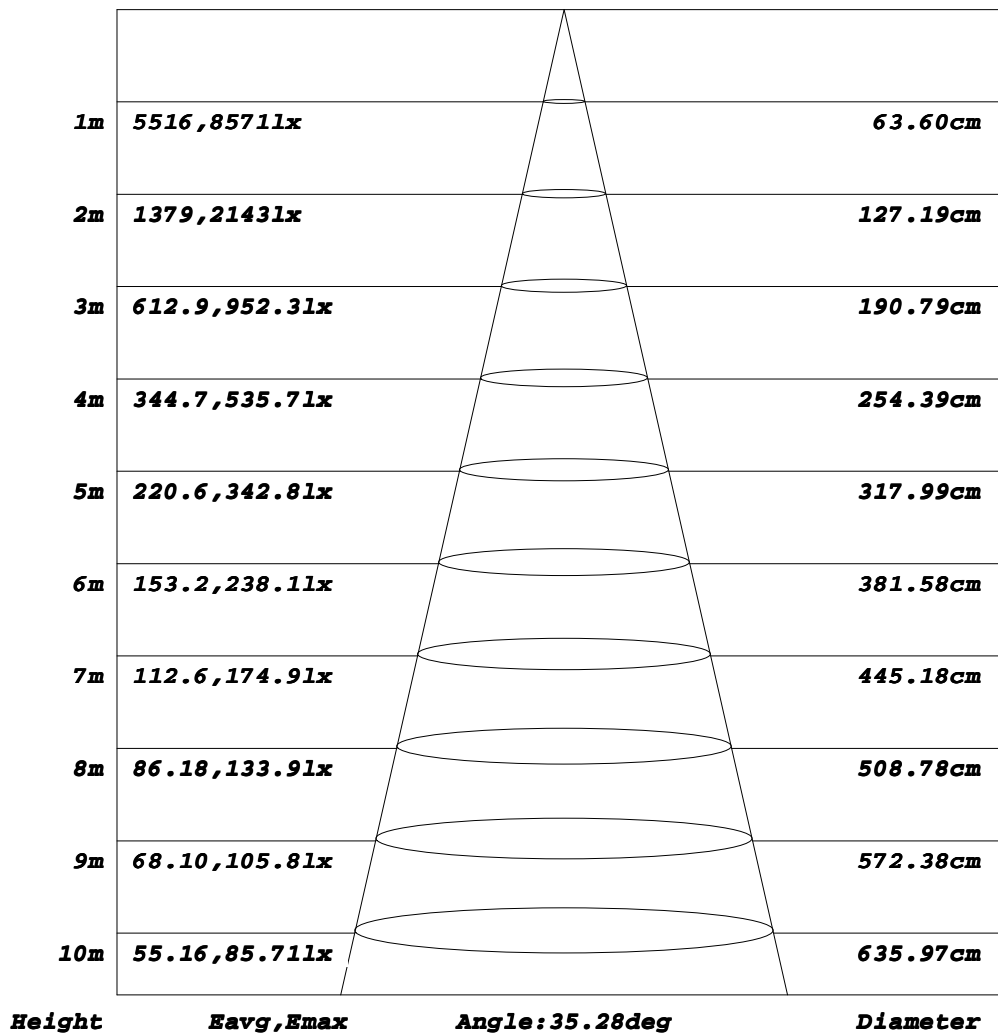


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

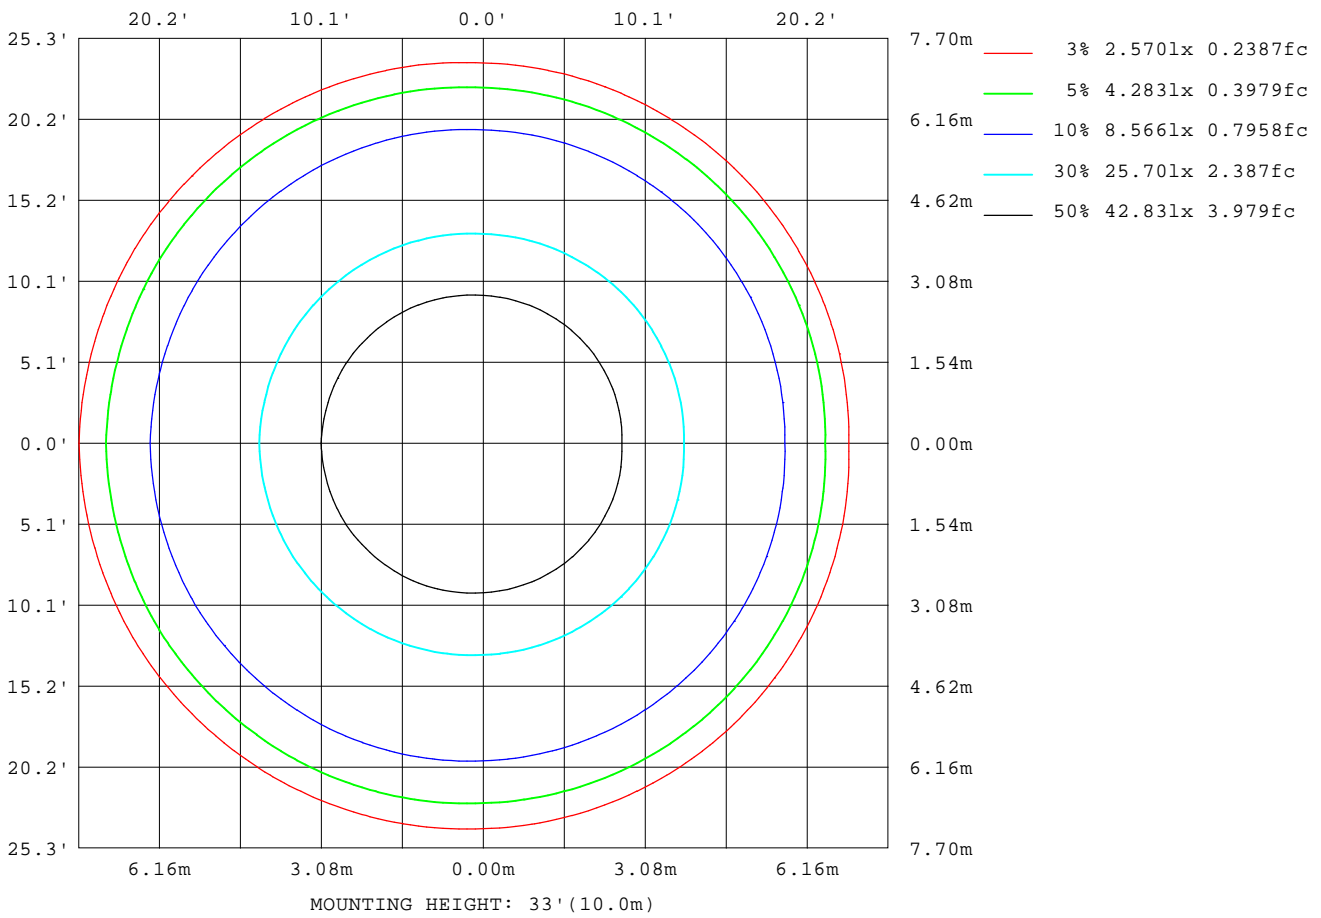

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

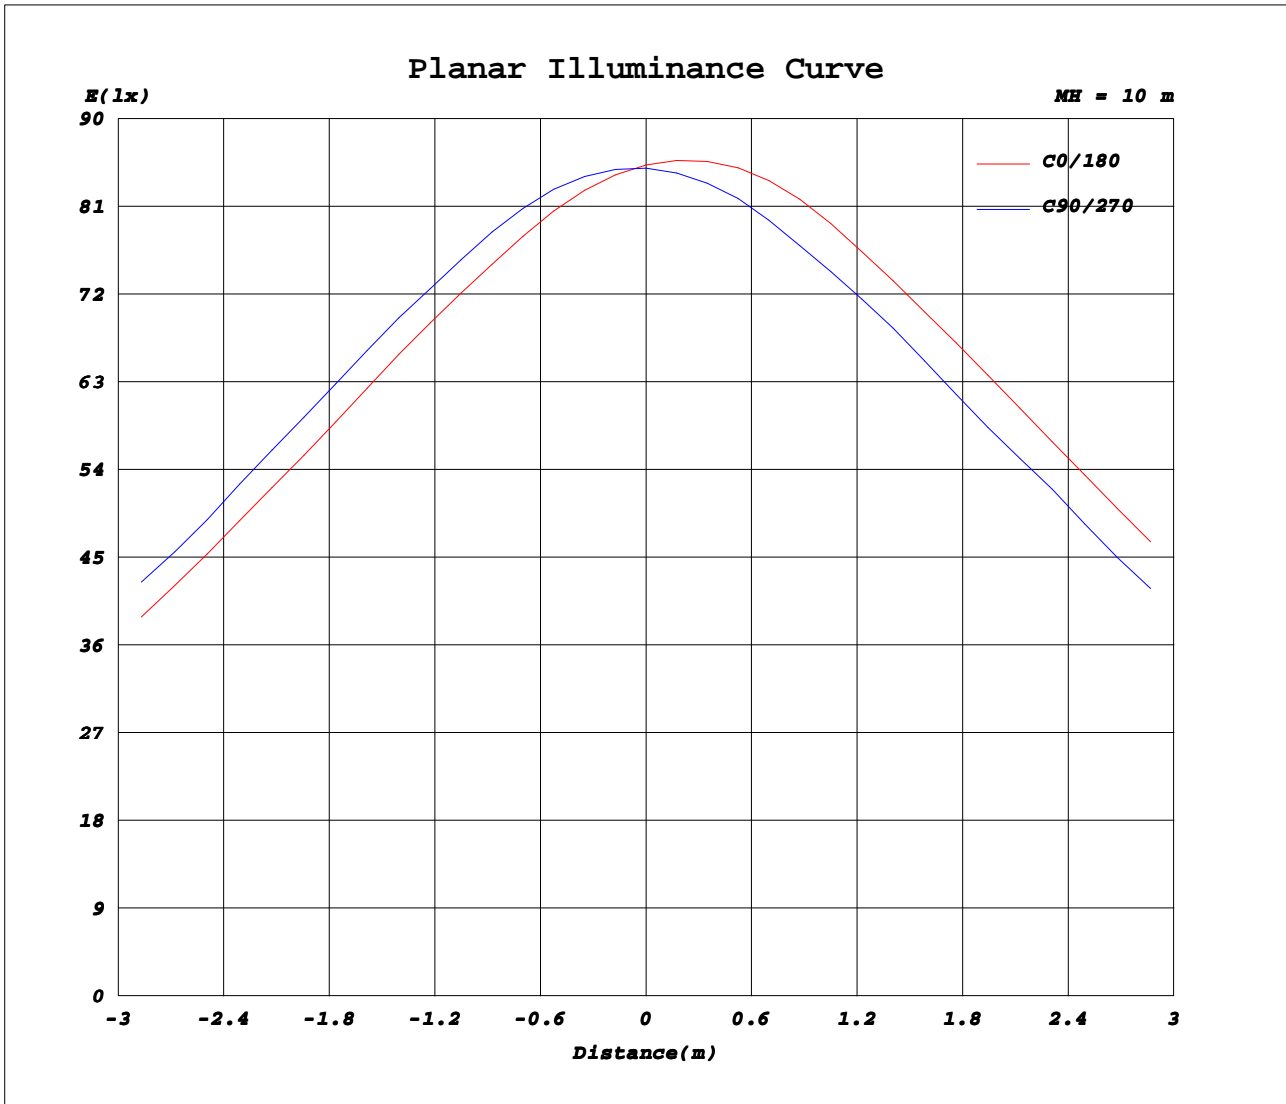

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1560A P:33.000W PF:0.9540 Freq:50.00Hz		
Lamp Flux:3953.49x1 lm		
Name: NS72-35W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	8526	8507	8495	8491	8502	8515	8526	8515	8502	8491	8495	8507							
5	7595	7706	7817	7929	8082	8205	8267	8144	7970	7788	7692	7627							
10	6167	6299	6435	6574	6768	6927	7014	6878	6678	6461	6334	6236							
15	4672	4786	4914	5054	5265	5445	5552	5419	5217	4993	4860	4753							
20	3346	3431	3532	3648	3830	3988	4084	3969	3795	3603	3492	3407							
25	2322	2417	2512	2608	2736	2841	2898	2808	2676	2531	2444	2374							
30	1278	1380	1483	1588	1732	1850	1915	1818	1673	1513	1416	1338							
35	436	510	585	663	772	862	911	837	727	606	534	478							
40	105	112	125	144	180	213	234	210	174	136	118	108							
45	47.7	49.3	52.4	57.0	65.8	74.0	79.5	74.7	67.2	58.7	54.0	50.3							
50	33.5	33.8	35.0	36.8	40.7	44.4	47.0	45.7	43.1	39.9	37.7	35.6							
55	23.5	24.0	25.0	26.4	29.1	31.6	33.3	32.4	30.5	28.2	26.6	25.0							
60	16.6	16.9	17.5	18.4	20.2	21.9	23.1	22.5	21.4	19.9	18.8	17.7							
65	13.1	13.2	13.5	14.0	15.1	16.2	17.1	17.1	16.7	16.0	15.3	14.3							
70	9.15	9.50	10.1	10.8	12.2	13.4	14.4	14.3	13.8	12.9	11.9	10.6							
75	6.38	6.24	6.47	7.08	8.44	9.89	11.1	11.3	11.1	10.4	9.46	8.11							
80	4.20	4.37	4.85	5.65	7.12	8.62	9.90	10.3	10.3	9.63	8.39	6.58							
85	1.36	0.97	1.05	1.61	3.09	4.72	6.17	6.70	6.72	6.21	5.13	3.52							
90	1.74	1.10	1.03	1.53	3.08	4.83	6.43	7.06	7.16	6.70	5.63	3.97							
95	2.33	1.63	1.54	2.07	3.72	5.59	7.30	7.97	8.07	7.58	6.44	4.69							
100	3.18	2.40	2.27	2.78	4.49	6.44	8.23	8.91	9.01	8.50	7.35	5.57							
105	4.45	3.58	3.39	3.85	5.54	7.48	9.26	9.95	10.1	9.58	8.47	6.77							
110	6.22	5.32	5.07	5.48	7.05	8.89	10.6	11.3	11.5	11.0	10.0	8.42							
115	8.52	7.52	7.19	7.51	9.00	10.8	12.4	13.1	13.3	13.0	12.1	10.6							
120	11.4	10.3	9.90	10.1	11.5	13.2	14.7	15.5	15.7	15.5	14.6	13.3							
125	14.9	13.9	13.4	13.5	14.7	16.1	17.6	18.3	18.6	18.5	17.8	16.6							
130	19.4	18.3	17.7	17.7	18.6	19.9	21.1	21.8	22.2	22.1	21.7	20.7							
135	24.6	23.5	22.9	22.7	23.3	24.2	25.2	25.9	26.3	26.5	26.3	25.6							
140	30.3	29.2	28.6	28.4	28.8	29.5	30.2	30.9	31.3	31.6	31.5	31.0							
145	35.9	35.0	34.4	34.2	34.5	35.0	35.6	36.1	36.6	36.9	36.8	36.5							
150	40.5	39.9	39.6	39.5	39.8	40.2	40.6	41.1	41.5	41.7	41.5	41.1							
155	43.3	43.1	43.1	43.2	43.5	43.8	44.2	44.7	45.2	45.3	45.0	44.3							
160	43.6	43.9	44.2	44.5	45.0	45.4	45.8	46.3	46.5	46.5	45.9	45.0							
165	41.8	42.2	42.7	43.2	43.8	44.4	44.9	45.2	45.2	44.9	44.2	43.2							
170	39.4	39.8	40.4	40.9	41.7	42.3	42.8	42.7	42.3	41.7	41.1	40.3							
175	38.1	38.3	38.6	38.9	39.5	40.1	40.5	40.2	39.7	39.2	38.8	38.4							
180	38.6	38.6	38.6	38.6	38.7	38.8	38.9	38.7	38.6	38.4	38.4	38.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: