
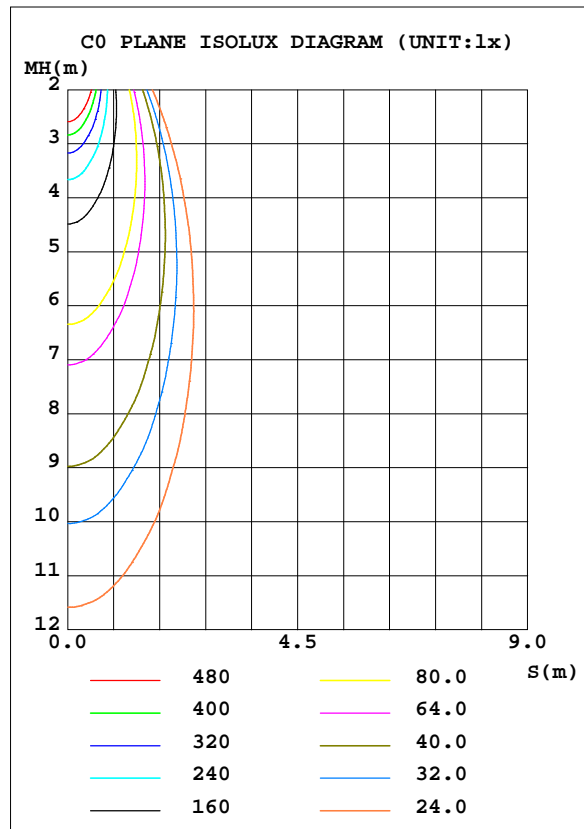


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 98.21 lm/W			
MODEL		I _{max} (cd)	3243	S/MH(C0/180)	0.55
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1591.0	η UP, DN(C0-180)	1.4, 49.3
NOMINAL FLUX(lm)	1590.99	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.6, 47.7
LAMPS INSIDE	1	η up(%)	3.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	221.6	η down(%)	97.0	CIBSE SHR MAX	0.60

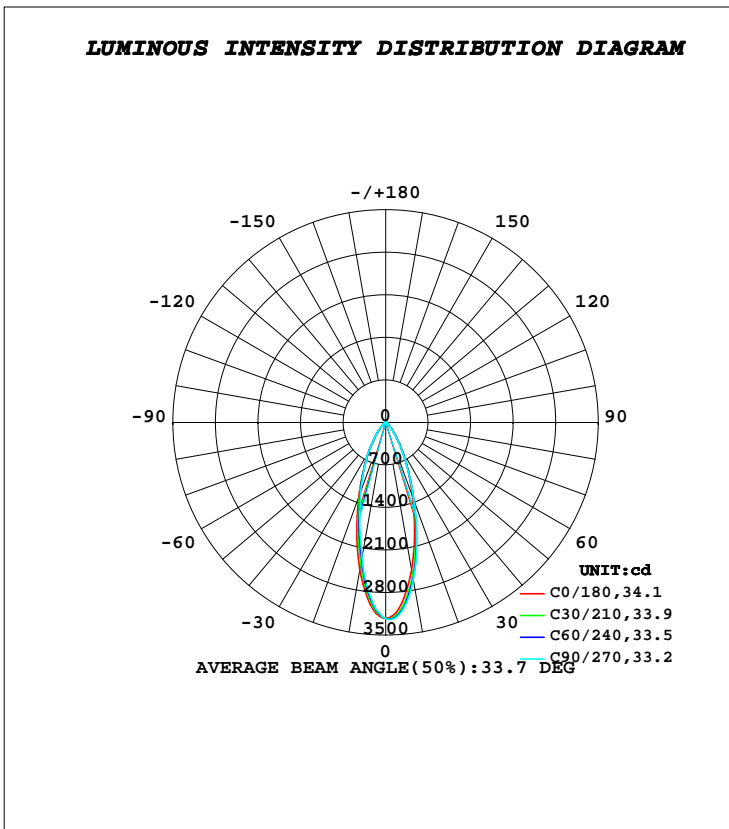

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2465	2581	2630	2581	2465	2330	2252	2330	0- 10	268.7	268.7	16.9,16.9
20	1305	1349	1361	1349	1305	1242	1202	1242	10- 20	506.7	775.3	48.7,48.7
30	566.3	555.3	544.9	555.3	566.3	571.9	569.8	571.9	20- 30	403.1	1178	74.1,74.1
40	203.3	192.7	185.2	192.7	203.3	211.6	213.6	211.6	30- 40	219.6	1398	87.9,87.9
50	65.32	60.33	56.98	60.33	65.32	68.64	69.45	68.64	40- 50	91.78	1490	93.6,93.6
60	22.19	20.76	19.73	20.76	22.19	22.58	22.47	22.58	50- 60	35.01	1525	95.8,95.8
70	7.184	6.487	6.012	6.487	7.184	7.766	7.930	7.766	60- 70	12.94	1538	96.7,96.7
80	2.093	1.602	1.270	1.602	2.093	2.755	3.000	2.755	70- 80	4.237	1542	96.9,96.9
90	1.659	1.075	0.7046	1.075	1.659	2.343	2.606	2.343	80- 90	1.870	1544	97,97
100	2.326	1.703	1.313	1.703	2.326	3.026	3.297	3.026	90-100	2.170	1546	97.2,97.2
110	3.507	2.897	2.520	2.897	3.507	4.188	4.457	4.188	100-110	3.043	1549	97.4,97.4
120	5.400	4.822	4.472	4.822	5.400	6.026	6.278	6.026	110-120	4.368	1554	97.6,97.6
130	8.130	7.542	7.198	7.542	8.130	8.598	8.782	8.598	120-130	5.954	1559	98,98
140	11.76	11.20	10.89	11.20	11.76	12.00	12.09	12.00	130-140	7.522	1567	98.5,98.5
150	15.74	15.24	14.97	15.24	15.74	15.82	15.84	15.82	140-150	8.488	1575	99,99
160	19.01	18.58	18.33	18.58	19.01	18.95	18.88	18.95	150-160	7.942	1583	99.5,99.5
170	20.71	20.55	20.44	20.55	20.71	20.38	20.18	20.38	160-170	5.576	1589	99.9,99.9
180	21.77	21.49	21.30	21.49	21.77	21.46	21.26	21.46	170-180	1.986	1591	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

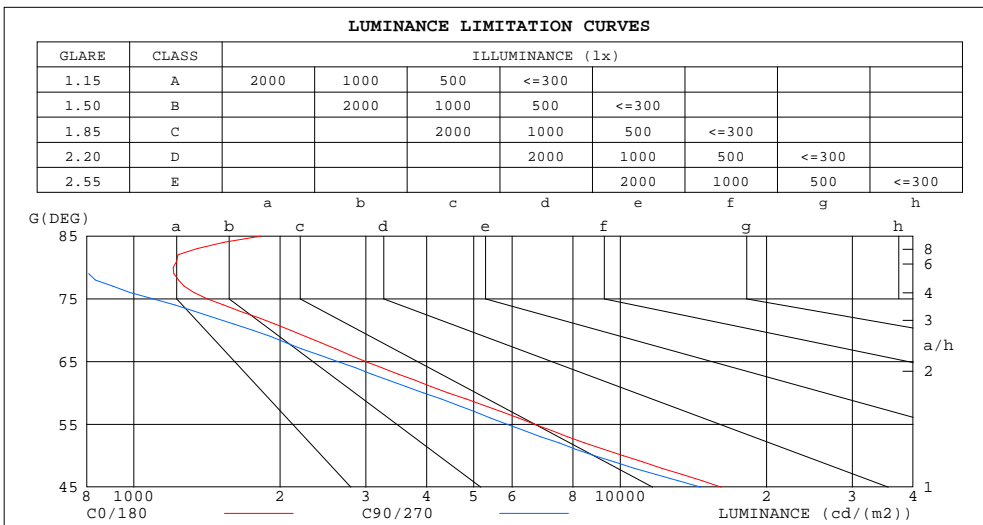

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1824	824
80	1205	731
75	1418	1097
70	2100	1758
65	3000	2630
60	4439	3946
55	6680	5865
50	10163	8865
45	16129	14644


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.03	1.01	.00	.99	.98	.96	.95	.94	.93	.91
2.0	1.03	.99	.96	1.01	.97	.94	.97	.94	.92	.94	.91	.89	.91	.89	.87	.85
3.0	.96	.91	.88	.95	.90	.87	.92	.88	.85	.89	.86	.83	.86	.84	.82	.80
4.0	.90	.85	.81	.89	.84	.80	.87	.82	.79	.84	.81	.78	.82	.79	.77	.75
5.0	.85	.80	.76	.84	.79	.75	.82	.78	.74	.80	.76	.73	.78	.75	.72	.71
6.0	.80	.75	.71	.80	.74	.70	.78	.73	.70	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.71	.67	.75	.70	.66	.74	.69	.66	.73	.68	.65	.71	.68	.65	.63
8.0	.72	.67	.63	.72	.66	.63	.70	.66	.62	.69	.65	.62	.68	.64	.61	.60
9.0	.69	.63	.60	.68	.63	.60	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57
10.0	.66	.60	.57	.65	.60	.57	.64	.60	.56	.63	.59	.56	.62	.59	.56	.55

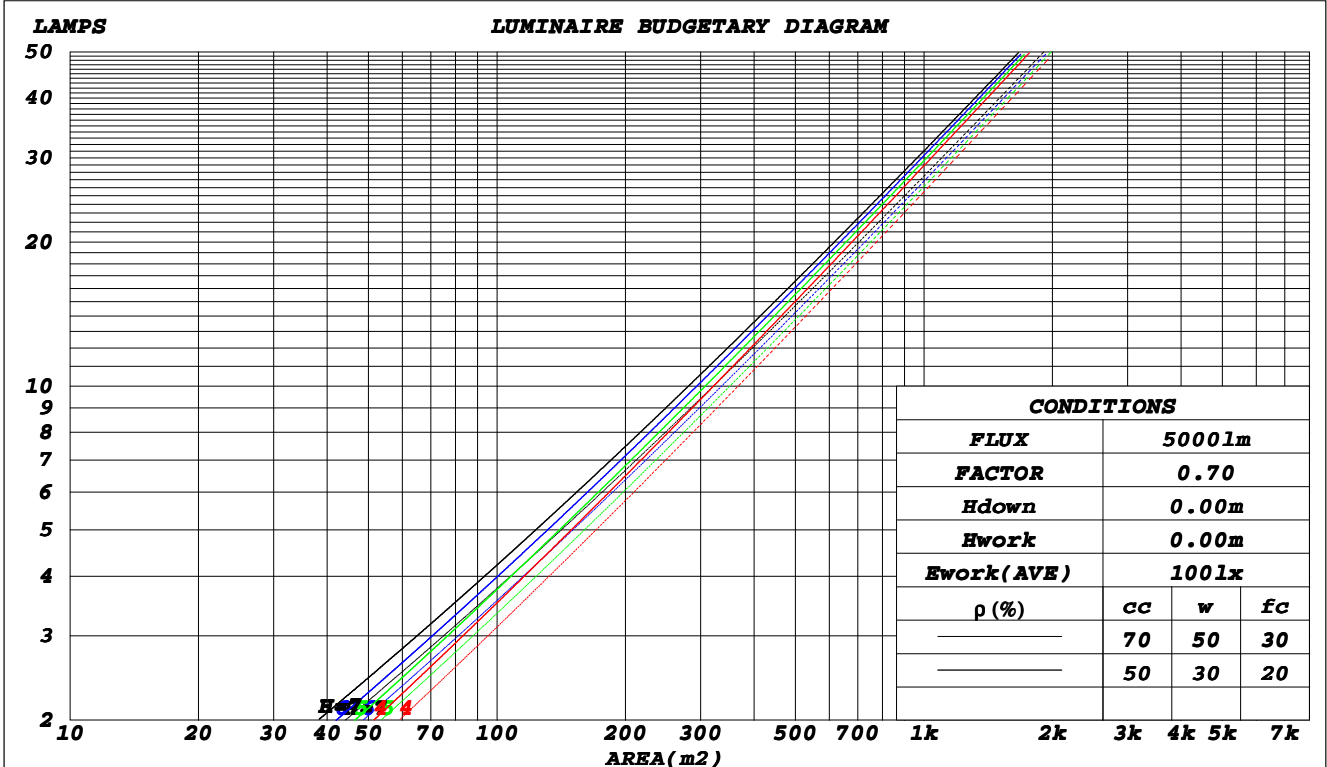

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.175	.099	.031	.167	.095	.030	.153	.088	.028	.140	.081	.026	.128	.074	.024	
2.0	.166	.091	.028	.159	.088	.027	.147	.082	.025	.136	.076	.024	.126	.071	.022	
3.0	.157	.084	.025	.151	.081	.024	.141	.076	.023	.131	.072	.022	.122	.068	.021	
4.0	.149	.077	.023	.144	.075	.022	.135	.071	.021	.126	.068	.020	.119	.064	.020	
5.0	.141	.072	.021	.137	.070	.020	.129	.067	.020	.121	.064	.019	.114	.061	.018	
6.0	.134	.067	.019	.130	.066	.019	.123	.063	.018	.117	.061	.018	.110	.058	.017	
7.0	.128	.063	.018	.124	.062	.018	.118	.060	.017	.112	.057	.017	.106	.055	.016	
8.0	.122	.059	.017	.119	.058	.017	.113	.056	.016	.108	.055	.016	.103	.053	.015	
9.0	.116	.056	.016	.114	.055	.016	.108	.054	.015	.104	.052	.015	.099	.050	.015	
10.0	.111	.053	.015	.109	.053	.015	.104	.051	.014	.100	.050	.014	.096	.048	.014	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.194	.180	.168	.166	.155	.144	.113	.106	.100	.065	.062	.058	.021	.020	.019	
2.0	.178	.155	.136	.153	.134	.118	.105	.093	.082	.060	.054	.048	.019	.017	.016	
3.0	.166	.137	.113	.142	.118	.098	.098	.082	.069	.056	.048	.041	.018	.016	.013	
4.0	.155	.122	.096	.133	.105	.084	.092	.073	.059	.053	.043	.035	.017	.014	.011	
5.0	.146	.110	.084	.126	.095	.073	.086	.067	.051	.050	.039	.030	.016	.013	.010	
6.0	.139	.101	.074	.119	.087	.064	.082	.061	.046	.048	.036	.027	.015	.012	.009	
7.0	.132	.093	.066	.113	.081	.058	.078	.057	.041	.046	.033	.024	.015	.011	.008	
8.0	.126	.087	.060	.108	.075	.053	.075	.053	.037	.044	.031	.022	.014	.010	.007	
9.0	.121	.082	.055	.104	.071	.048	.072	.050	.034	.042	.029	.020	.014	.010	.007	
10.0	.116	.077	.052	.100	.067	.045	.069	.047	.032	.040	.028	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.3	16.7	17.5	17.7	16.1	17.0	16.4	17.2	17.4
3H	16.4	17.2	16.7	17.4	17.7	16.0	16.8	16.3	17.1	17.3
4H	16.3	17.1	16.6	17.3	17.6	15.9	16.7	16.3	17.0	17.2
6H	16.2	17.0	16.6	17.2	17.5	15.9	16.6	16.2	16.9	17.2
8H	16.2	16.9	16.5	17.2	17.5	15.8	16.5	16.2	16.8	17.1
12H	16.2	16.8	16.5	17.1	17.5	15.8	16.4	16.1	16.7	17.1
4H 2H	16.3	17.0	16.6	17.3	17.6	15.9	16.7	16.3	17.0	17.2
3H	16.2	16.9	16.6	17.2	17.5	15.9	16.5	16.2	16.9	17.2
4H	16.2	16.8	16.6	17.1	17.5	15.8	16.4	16.2	16.8	17.1
6H	16.1	16.6	16.5	17.0	17.4	15.7	16.2	16.1	16.6	17.0
8H	16.1	16.5	16.5	16.9	17.4	15.7	16.2	16.1	16.6	17.0
12H	16.0	16.5	16.5	16.9	17.3	15.6	16.1	16.1	16.5	16.9
8H 4H	16.0	16.5	16.5	16.9	17.3	15.7	16.2	16.1	16.6	17.0
6H	16.0	16.4	16.4	16.8	17.3	15.6	16.0	16.1	16.4	16.9
8H	15.9	16.3	16.4	16.7	17.2	15.5	15.9	16.0	16.4	16.9
12H	15.9	16.2	16.4	16.7	17.2	15.5	15.8	16.0	16.3	16.8
12H 4H	16.0	16.4	16.4	16.8	17.3	15.6	16.1	16.1	16.5	16.9
6H	15.9	16.3	16.4	16.7	17.2	15.5	15.9	16.0	16.3	16.8
8H	15.9	16.2	16.4	16.7	17.2	15.5	15.8	16.0	16.3	16.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 4.5					+ 2.3 / - 4.9				
1.5H	+ 3.8 / - 3.6					+ 3.7 / - 3.6				
2.0H	+ 4.2 / - 3.9					+ 4.1 / - 3.9				

CIE Pub.117, 1591 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.6)
 Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	77	73	83	77	73	82	76	73	69
0.80	92	85	81	91	85	81	89	84	81	76
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	95	91	100	95	91	97	93	90	85
1.50	104	99	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	104	101	107	103	100	103	100	98	91
3.00	110	107	104	108	105	102	104	102	100	92
4.00	112	109	107	110	108	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

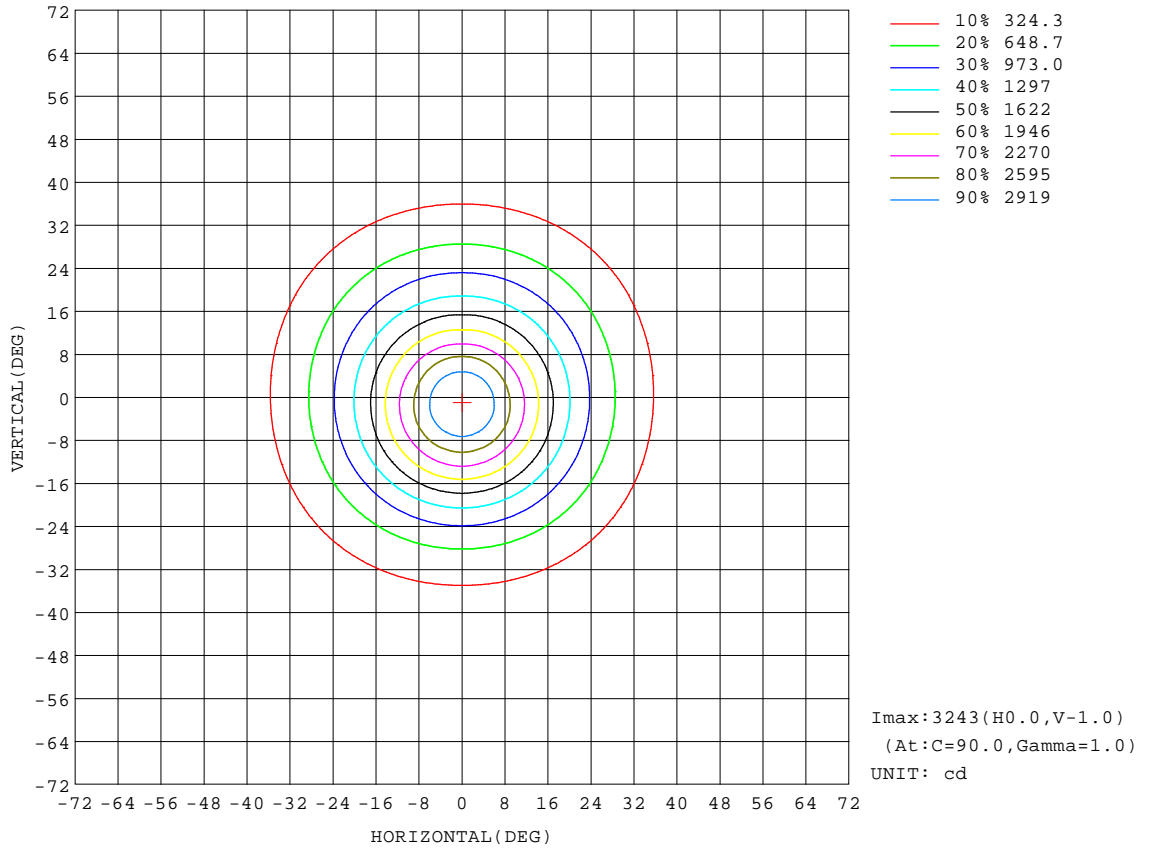


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

Flux out:624.6 lm

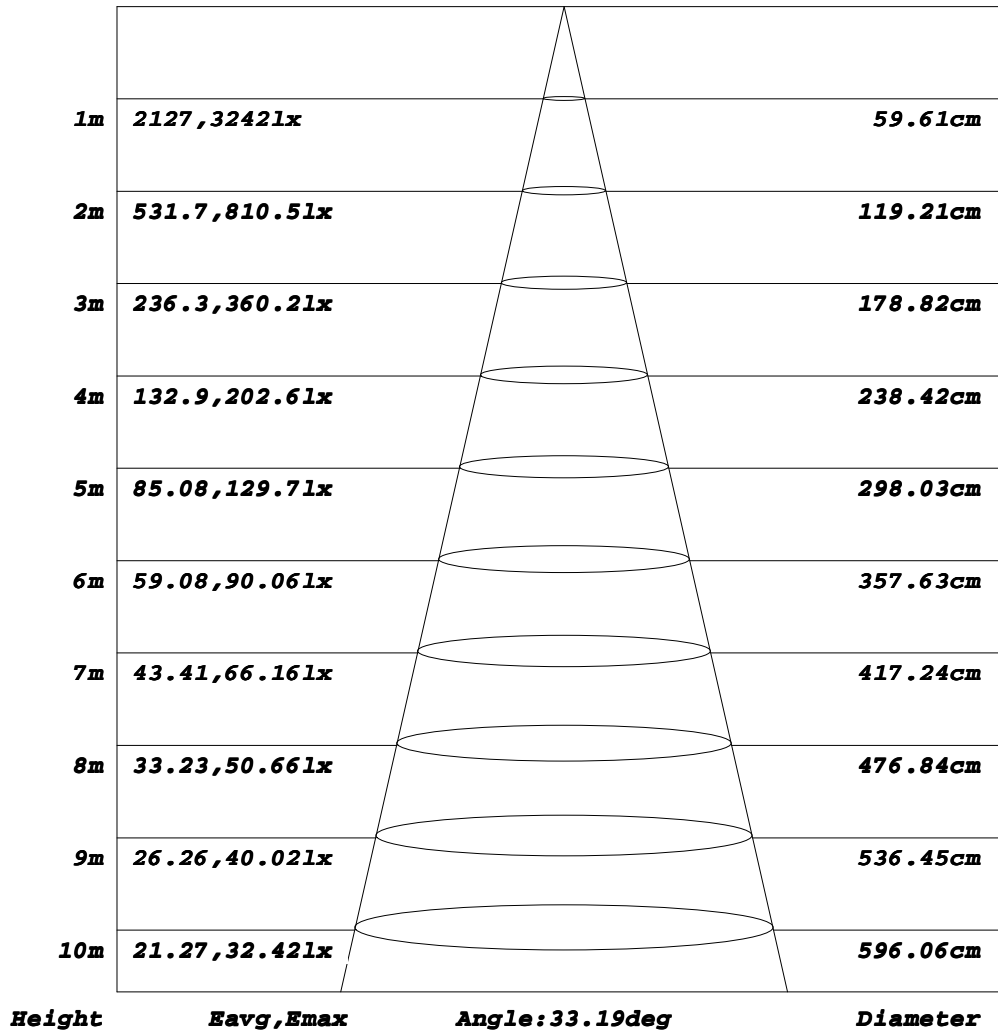


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

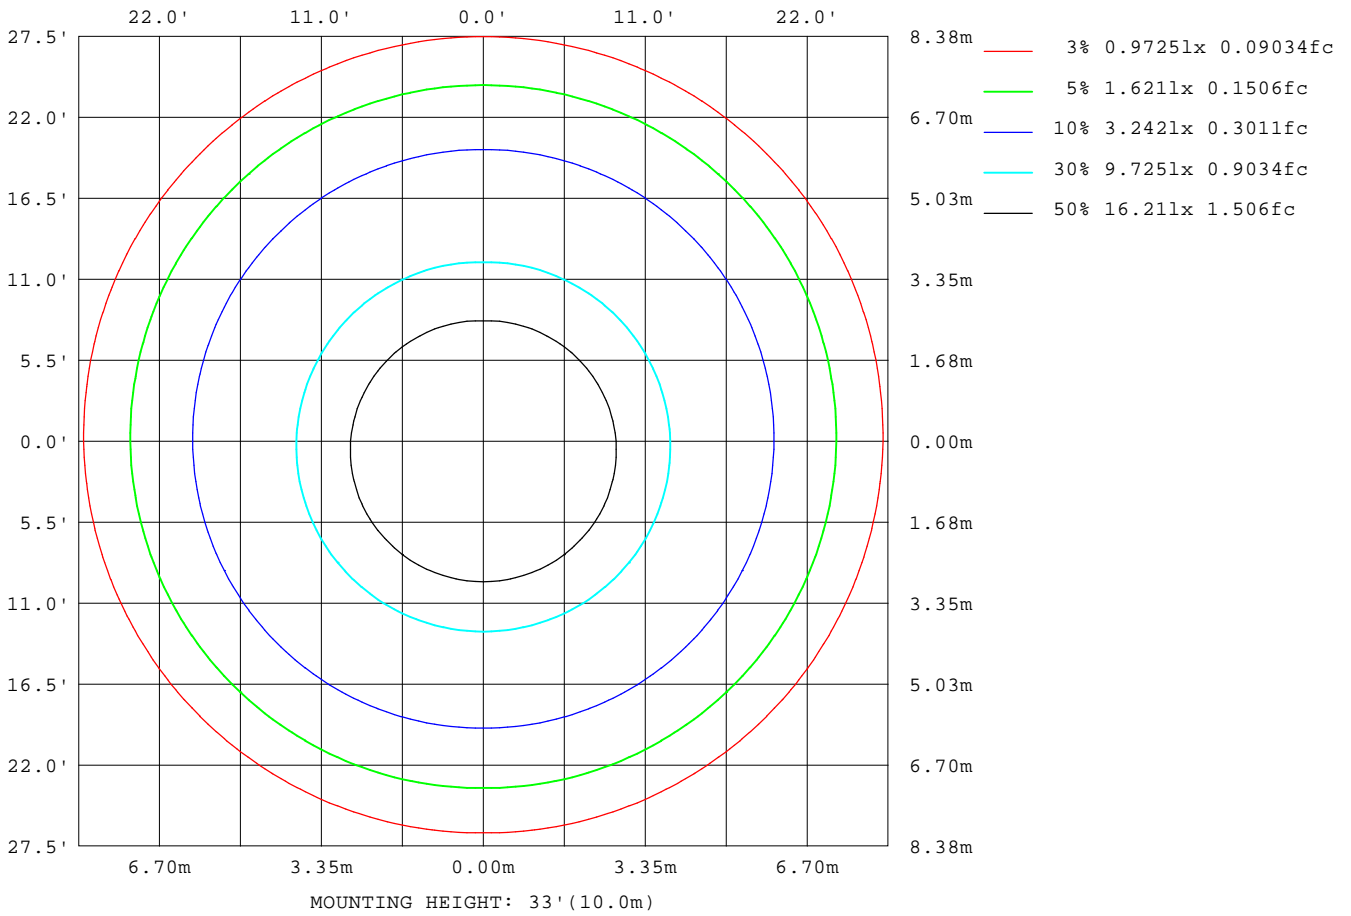

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

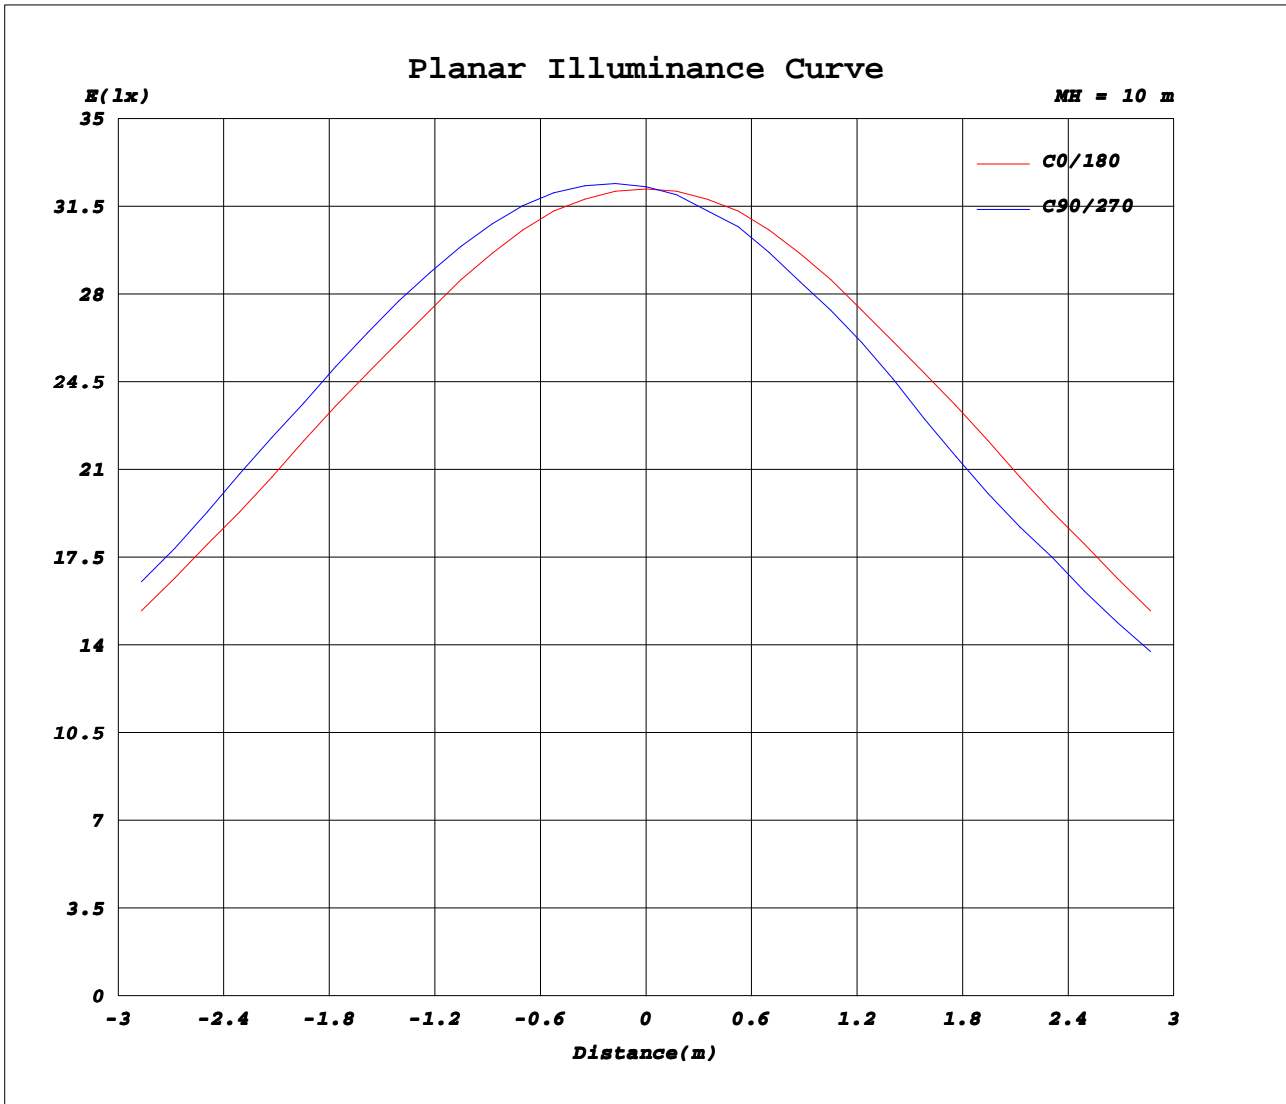

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.80V I:0.0710A P:16.200W PF:0.9760 Freq:50.00Hz		
Lamp Flux:1590.99x1 lm		
Name: NS94-130MM-16W	Type: LED	
MFR.: Lumega Group	DIM.: 130*130*90mm	
	SUR.: 100*100mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3219	3223	3227	3229	3227	3223	3219	3223	3227	3229	3227	3223							
5	2998	3061	3101	3116	3101	3061	2998	2946	2905	2883	2905	2946							
10	2465	2554	2609	2630	2609	2554	2465	2367	2292	2252	2292	2367							
15	1850	1923	1967	1982	1967	1923	1850	1762	1692	1654	1692	1762							
20	1305	1339	1358	1361	1358	1339	1305	1261	1224	1202	1224	1261							
25	881	886	885	881	885	886	881	871	859	850	859	871							
30	566	559	551	545	551	559	566	572	572	570	572	572							
35	347	338	330	324	330	338	347	354	357	356	357	354							
40	203	196	189	185	189	196	203	210	213	214	213	210							
45	114	110	106	104	106	110	114	119	121	122	121	119							
50	65.3	61.8	58.8	57.0	58.8	61.8	65.3	68.0	69.3	69.5	69.3	68.0							
55	38.3	36.4	34.7	33.6	34.7	36.4	38.3	39.6	40.3	40.3	40.3	39.6							
60	22.2	21.2	20.3	19.7	20.3	21.2	22.2	22.6	22.6	22.5	22.6	22.6							
65	12.7	12.0	11.5	11.1	11.5	12.0	12.7	13.2	13.4	13.4	13.4	13.2							
70	7.18	6.70	6.28	6.01	6.28	6.70	7.18	7.65	7.89	7.93	7.89	7.65							
75	3.67	3.33	3.03	2.84	3.03	3.33	3.67	4.11	4.36	4.42	4.36	4.11							
80	2.09	1.75	1.45	1.27	1.45	1.75	2.09	2.61	2.91	3.00	2.91	2.61							
85	1.59	1.21	0.90	0.72	0.90	1.21	1.59	2.10	2.41	2.51	2.41	2.10							
90	1.66	1.25	0.90	0.70	0.90	1.25	1.66	2.18	2.50	2.61	2.50	2.18							
95	1.95	1.52	1.17	0.96	1.17	1.52	1.95	2.48	2.80	2.91	2.80	2.48							
100	2.33	1.88	1.52	1.31	1.52	1.88	2.33	2.86	3.19	3.30	3.19	2.86							
105	2.84	2.39	2.03	1.82	2.03	2.39	2.84	3.37	3.69	3.80	3.69	3.37							
110	3.51	3.07	2.72	2.52	2.72	3.07	3.51	4.03	4.35	4.46	4.35	4.03							
115	4.36	3.94	3.60	3.41	3.60	3.94	4.36	4.87	5.18	5.29	5.18	4.87							
120	5.40	4.99	4.66	4.47	4.66	4.99	5.40	5.88	6.17	6.28	6.17	5.88							
125	6.64	6.23	5.90	5.72	5.90	6.23	6.64	7.08	7.34	7.43	7.34	7.08							
130	8.13	7.71	7.38	7.20	7.38	7.71	8.13	8.49	8.71	8.78	8.71	8.49							
135	9.81	9.41	9.11	8.95	9.11	9.41	9.81	10.1	10.3	10.3	10.3	10.1							
140	11.8	11.4	11.0	10.9	11.0	11.4	11.8	11.9	12.1	12.1	12.1	11.9							
145	13.8	13.4	13.1	13.0	13.1	13.4	13.8	13.9	14.0	14.0	14.0	13.9							
150	15.7	15.4	15.1	15.0	15.1	15.4	15.7	15.8	15.8	15.8	15.8	15.8							
155	17.5	17.2	16.9	16.8	16.9	17.2	17.5	17.5	17.5	17.5	17.5	17.5							
160	19.0	18.7	18.5	18.3	18.5	18.7	19.0	19.0	18.9	18.9	18.9	19.0							
165	20.1	19.8	19.6	19.5	19.6	19.8	20.1	19.9	19.8	19.8	19.8	19.9							
170	20.7	20.6	20.5	20.4	20.5	20.6	20.7	20.5	20.3	20.2	20.3	20.5							
175	21.3	21.2	21.1	21.0	21.1	21.2	21.3	20.9	20.7	20.5	20.7	20.9							
180	21.8	21.6	21.4	21.3	21.4	21.6	21.8	21.5	21.4	21.3	21.4	21.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: