
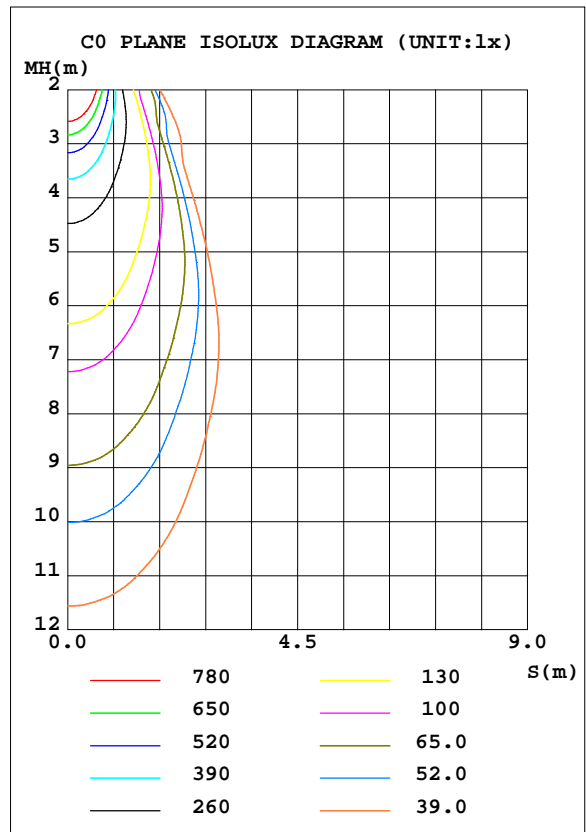


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31lx1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 104.53 lm/W			
MODEL		I _{max} (cd)	5212	S/MH(C0/180)	0.68
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.73
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3261.3	η UP, DN(C0-180)	1.4, 48.6
NOMINAL FLUX(lm)	3261.31	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 48.6
LAMPS INSIDE	1	η up(%)	2.8	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	97.2	CIBSE SHR MAX	0.75

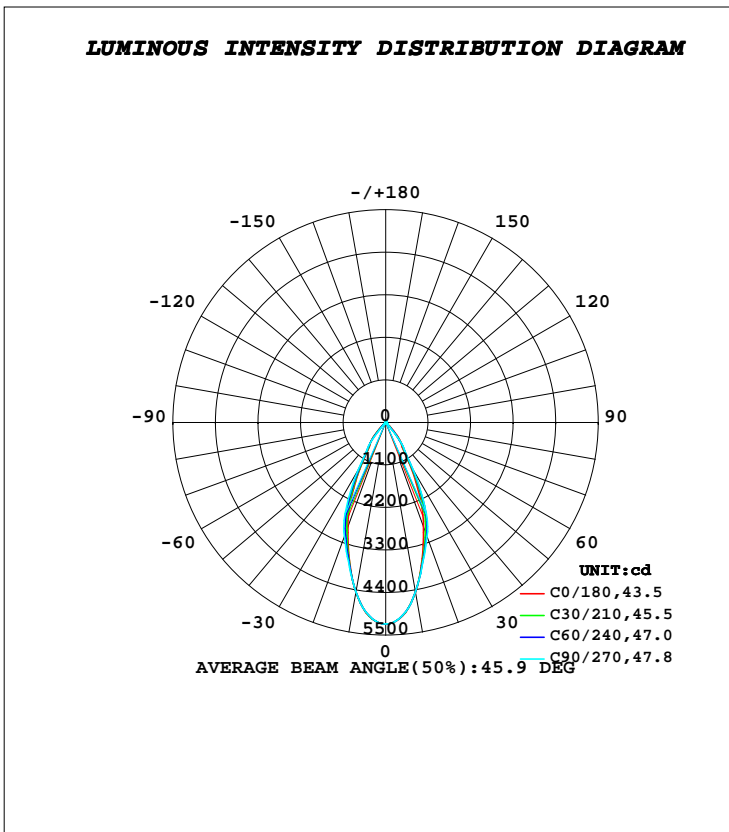

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4456	4447	4444	4450	4456	4450	4444	4447	0- 10	460.7	460.7	14.1,14.1
20	2866	3060	3135	3001	2866	3001	3135	3060	10- 20	1031	1491	45.7,45.7
30	1228	1369	1423	1325	1228	1325	1423	1369	20- 30	1011	2502	76.7,76.7
40	505.6	409.9	373.1	439.3	505.6	439.3	373.1	409.9	30- 40	503.6	3006	92.2,92.2
50	49.53	52.15	53.16	51.35	49.53	51.35	53.16	52.15	40- 50	122.9	3128	95.9,95.9
60	14.38	13.57	13.26	13.82	14.38	13.82	13.26	13.57	50- 60	23.24	3152	96.6,96.6
70	6.030	5.457	5.237	5.634	6.030	5.634	5.237	5.457	60- 70	8.896	3161	96.9,96.9
80	3.451	3.101	2.967	3.209	3.451	3.209	2.967	3.101	70- 80	4.360	3165	97,97
90	3.458	3.581	3.629	3.543	3.458	3.543	3.629	3.581	80- 90	3.587	3169	97.2,97.2
100	4.708	4.843	4.895	4.801	4.708	4.801	4.895	4.843	90-100	4.472	3173	97.3,97.3
110	7.084	7.059	7.049	7.066	7.084	7.066	7.049	7.059	100-110	6.163	3179	97.5,97.5
120	11.05	10.84	10.77	10.91	11.05	10.91	10.77	10.84	110-120	8.742	3188	97.7,97.7
130	17.13	16.62	16.43	16.78	17.13	16.78	16.43	16.62	120-130	12.17	3200	98.1,98.1
140	24.74	24.13	23.90	24.32	24.74	24.32	23.90	24.13	130-140	15.69	3216	98.6,98.6
150	32.21	31.24	30.86	31.54	32.21	31.54	30.86	31.24	140-150	17.51	3233	99.1,99.1
160	35.32	34.25	33.84	34.58	35.32	34.58	33.84	34.25	150-160	15.44	3249	99.6,99.6
170	34.16	32.00	31.17	32.67	34.16	32.67	31.17	32.00	160-170	9.547	3258	99.9,99.9
180	34.23	31.61	30.60	32.41	34.23	32.41	30.60	31.61	170-180	3.067	3261	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

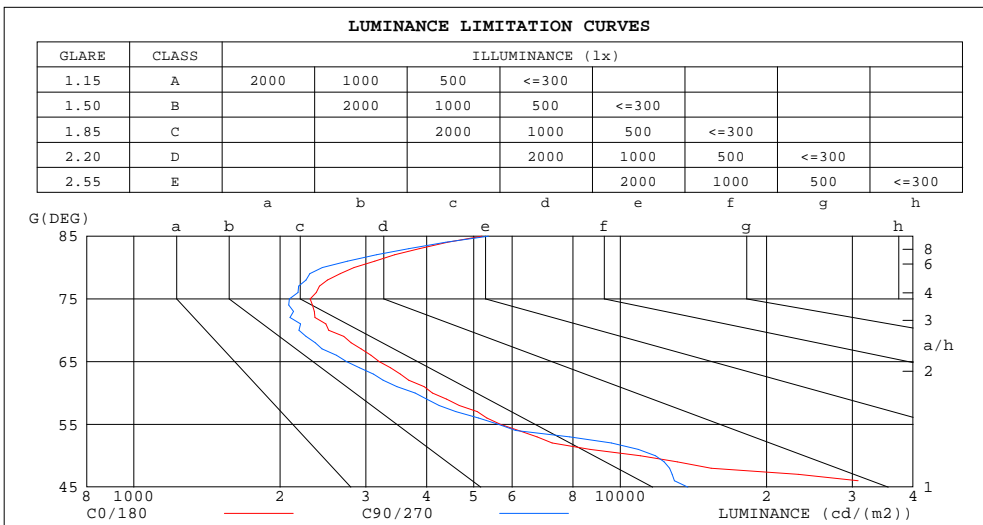

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5198	5359
80	2839	2441
75	2304	2090
70	2519	2187
65	3200	2738
60	4110	3788
55	5674	5629
50	11008	11814
45	40792	13774


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31lx1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.03	1.02	1.00	.99	.98	.97	.95	.94	.93	.91
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.92	.94	.92	.90	.91	.89	.88	.86
3.0	.97	.92	.88	.95	.91	.87	.92	.89	.86	.89	.86	.84	.87	.84	.82	.81
4.0	.91	.86	.82	.90	.85	.81	.87	.83	.80	.85	.81	.79	.83	.80	.77	.76
5.0	.86	.80	.76	.85	.79	.76	.82	.78	.75	.81	.77	.74	.79	.75	.73	.71
6.0	.81	.75	.71	.80	.75	.71	.78	.74	.70	.77	.73	.69	.75	.72	.69	.67
7.0	.76	.71	.67	.76	.70	.67	.74	.69	.66	.73	.69	.66	.71	.68	.65	.64
8.0	.73	.67	.63	.72	.67	.63	.71	.66	.62	.69	.65	.62	.68	.64	.62	.60
9.0	.69	.63	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57
10.0	.66	.60	.57	.65	.60	.56	.64	.59	.56	.63	.59	.56	.62	.58	.56	.54

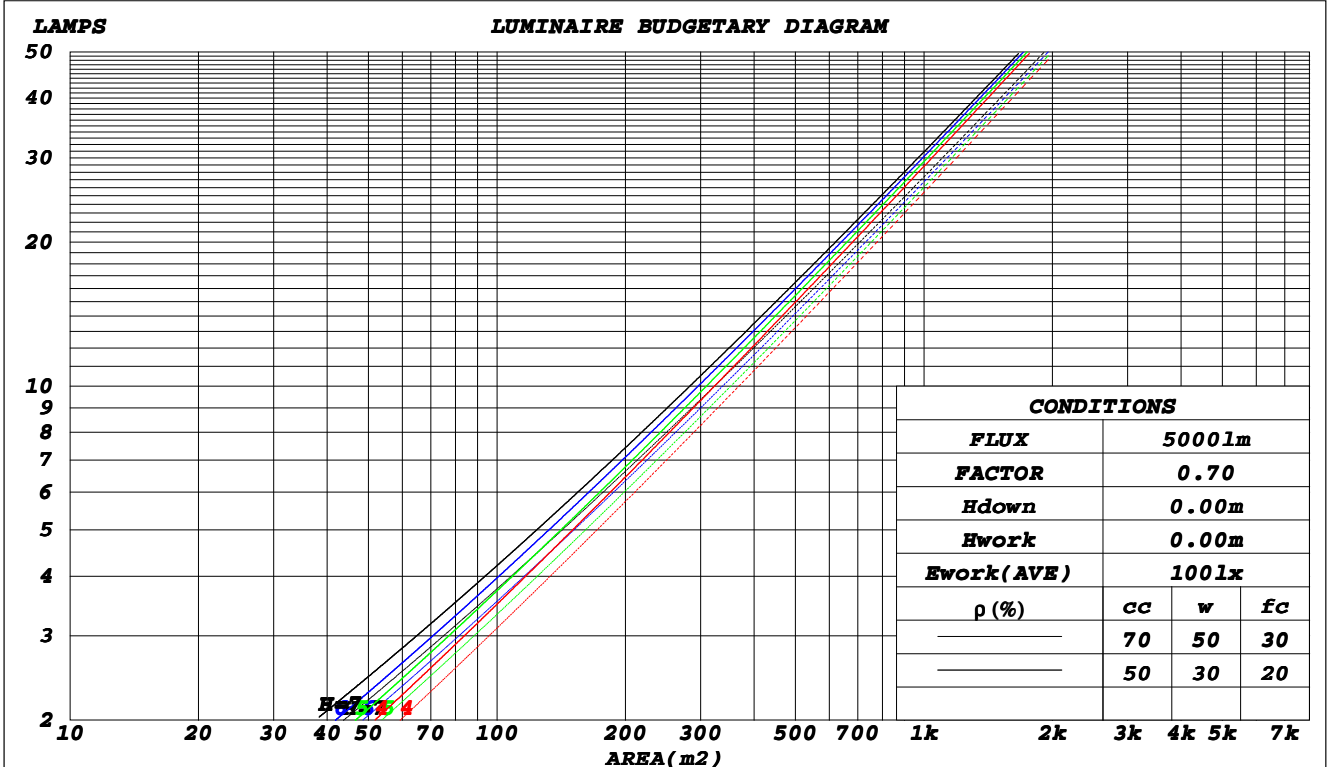

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.172	.098	.031	.164	.094	.030	.150	.086	.027	.137	.079	.025	.125	.072	.023	
2.0	.163	.089	.027	.157	.086	.027	.145	.080	.025	.133	.075	.023	.123	.070	.022	
3.0	.154	.082	.025	.149	.080	.024	.139	.075	.023	.129	.071	.022	.120	.067	.021	
4.0	.147	.076	.022	.142	.074	.022	.133	.070	.021	.125	.067	.020	.117	.063	.019	
5.0	.139	.071	.021	.135	.069	.020	.127	.066	.020	.120	.063	.019	.113	.060	.018	
6.0	.133	.067	.019	.129	.065	.019	.122	.063	.018	.116	.060	.018	.110	.058	.017	
7.0	.127	.063	.018	.124	.062	.018	.117	.059	.017	.112	.057	.017	.106	.055	.016	
8.0	.121	.059	.017	.119	.058	.016	.113	.056	.016	.108	.055	.016	.103	.053	.015	
9.0	.116	.056	.016	.114	.055	.016	.109	.054	.015	.104	.052	.015	.099	.050	.015	
10.0	.112	.054	.015	.109	.053	.015	.105	.051	.014	.100	.050	.014	.096	.048	.014	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.212	.212	.212	.181	.181	.181	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.193	.179	.167	.165	.154	.144	.113	.106	.099	.065	.061	.058	.021	.020	.019	
2.0	.177	.155	.136	.152	.133	.117	.104	.092	.082	.060	.054	.048	.019	.017	.016	
3.0	.164	.136	.113	.141	.117	.098	.097	.081	.069	.056	.047	.040	.018	.015	.013	
4.0	.154	.121	.096	.132	.104	.083	.091	.073	.059	.052	.043	.035	.017	.014	.011	
5.0	.145	.109	.083	.124	.095	.072	.086	.066	.051	.050	.039	.030	.016	.013	.010	
6.0	.137	.100	.073	.118	.087	.064	.081	.061	.045	.047	.036	.027	.015	.012	.009	
7.0	.131	.092	.065	.112	.080	.057	.078	.056	.040	.045	.033	.024	.015	.011	.008	
8.0	.125	.086	.059	.108	.075	.052	.074	.052	.037	.043	.031	.022	.014	.010	.007	
9.0	.120	.081	.055	.103	.070	.048	.072	.049	.034	.042	.029	.020	.013	.010	.007	
10.0	.115	.076	.051	.099	.066	.044	.069	.047	.031	.040	.028	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.5	20.4	19.8	20.6	20.8	19.3	20.2	19.6	20.4	20.6
3H	19.3	20.1	19.6	20.4	20.6	19.2	20.0	19.5	20.2	20.5
4H	19.3	20.0	19.6	20.3	20.6	19.1	19.8	19.4	20.1	20.4
6H	19.2	19.9	19.5	20.2	20.5	19.0	19.7	19.3	20.0	20.3
8H	19.1	19.8	19.5	20.1	20.4	19.0	19.6	19.3	19.9	20.3
12H	19.1	19.8	19.5	20.1	20.4	18.9	19.6	19.3	19.9	20.2
4H 2H	19.2	20.0	19.6	20.3	20.5	19.1	19.8	19.4	20.1	20.4
3H	19.1	19.7	19.4	20.0	20.4	18.9	19.6	19.3	19.9	20.2
4H	19.0	19.6	19.4	19.9	20.3	18.8	19.4	19.2	19.8	20.1
6H	18.9	19.4	19.3	19.8	20.2	18.7	19.3	19.2	19.6	20.0
8H	18.9	19.4	19.3	19.8	20.2	18.7	19.2	19.1	19.6	20.0
12H	18.9	19.3	19.3	19.7	20.2	18.7	19.1	19.1	19.5	20.0
8H 4H	18.8	19.3	19.3	19.7	20.2	18.7	19.1	19.1	19.5	20.0
6H	18.8	19.2	19.2	19.6	20.1	18.6	19.0	19.1	19.4	19.9
8H	18.7	19.1	19.2	19.6	20.1	18.6	18.9	19.0	19.4	19.9
12H	18.7	19.0	19.2	19.5	20.1	18.6	18.9	19.1	19.3	19.9
12H 4H	18.8	19.2	19.2	19.7	20.1	18.6	19.1	19.1	19.5	19.9
6H	18.7	19.1	19.2	19.5	20.0	18.5	18.9	19.0	19.3	19.8
8H	18.7	19.0	19.2	19.5	20.0	18.5	18.8	19.0	19.3	19.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / -10.2					+ 3.7 / -10.4				
1.5H	+ 5.4 / - 9.5					+ 6.2 / - 9.1				
2.0H	+ 7.8 / - 4.4					+ 3.2 / - 2.6				

CIE Pub.117, 3261 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.1$)
 Area: 0.007 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	77	86	80	77	85	80	76	73
0.80	94	88	85	93	88	84	92	87	84	80
1.00	98	93	89	97	92	89	96	92	88	84
1.25	102	97	94	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	101	98	95	90
2.00	108	104	100	106	102	99	103	100	98	92
2.50	109	106	103	108	104	101	104	101	99	93
3.00	111	108	105	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	95
5.00	114	112	110	112	110	108	107	106	105	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

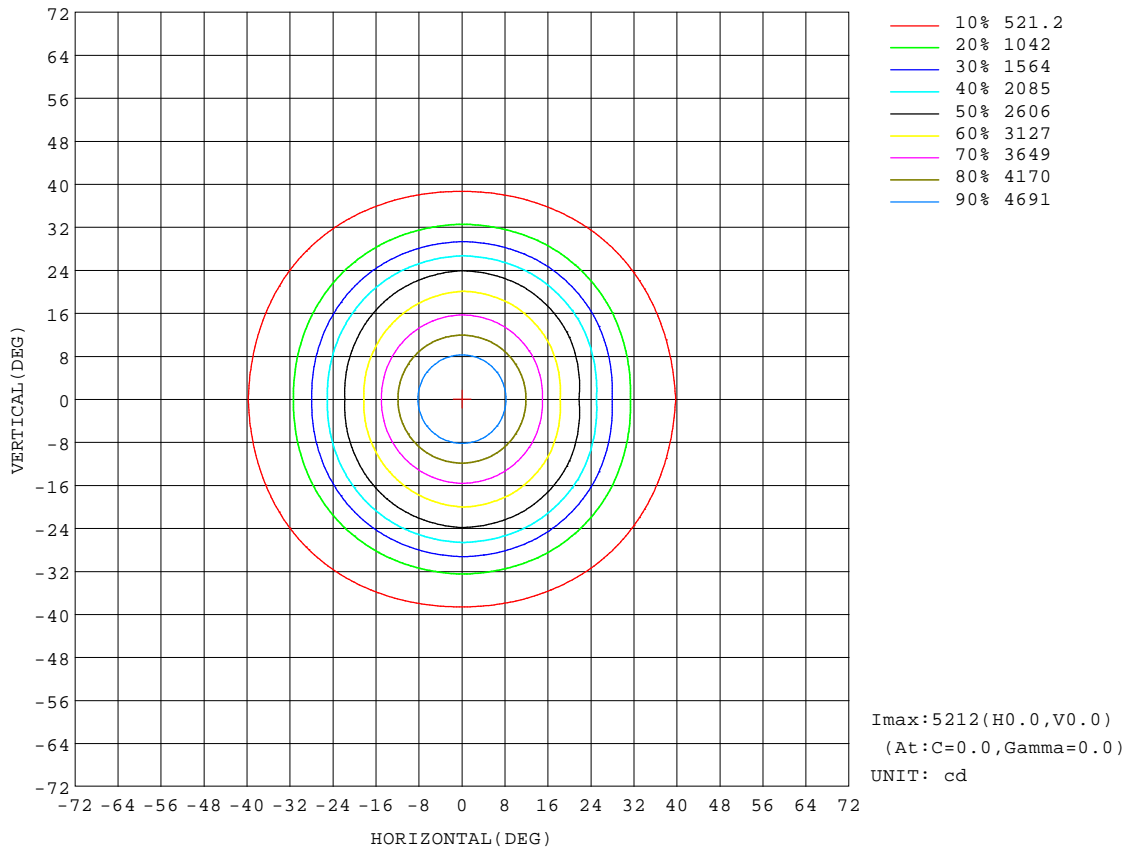


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.3lx1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

Flux out:1491 lm

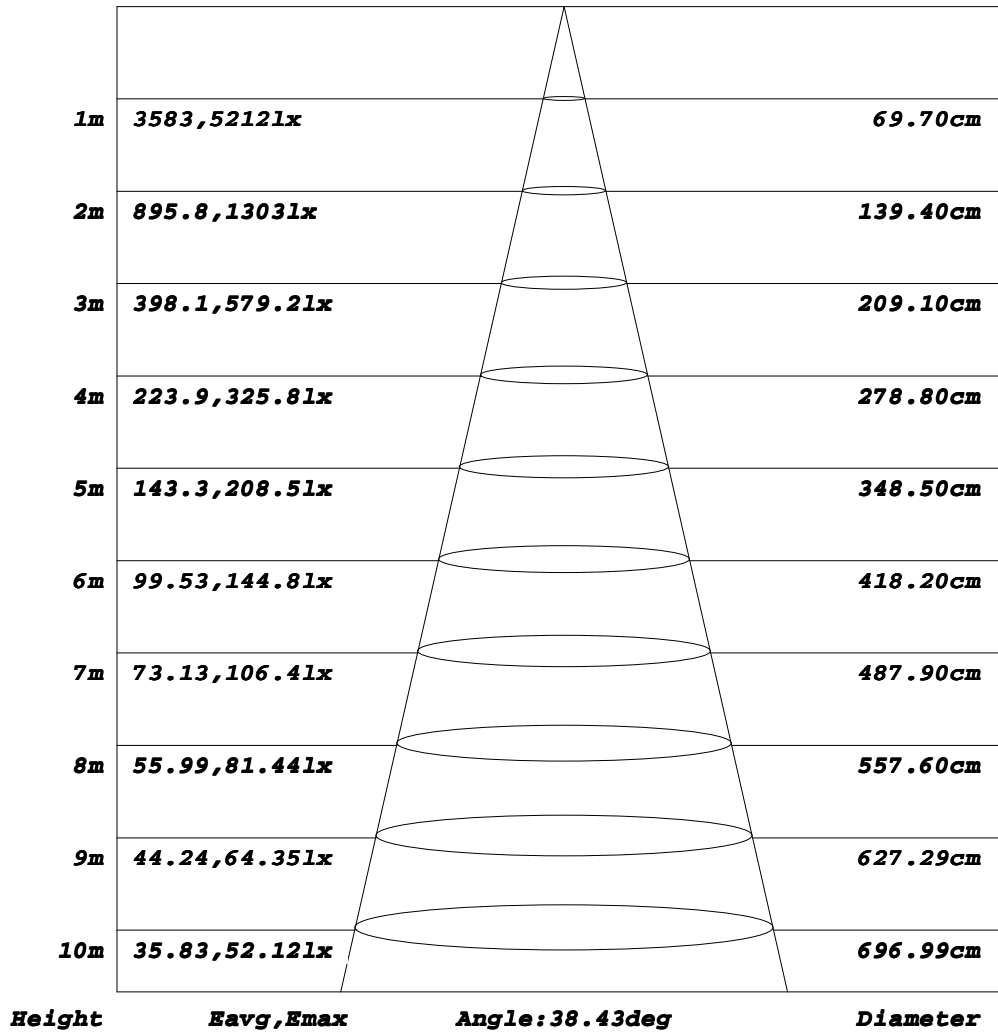


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

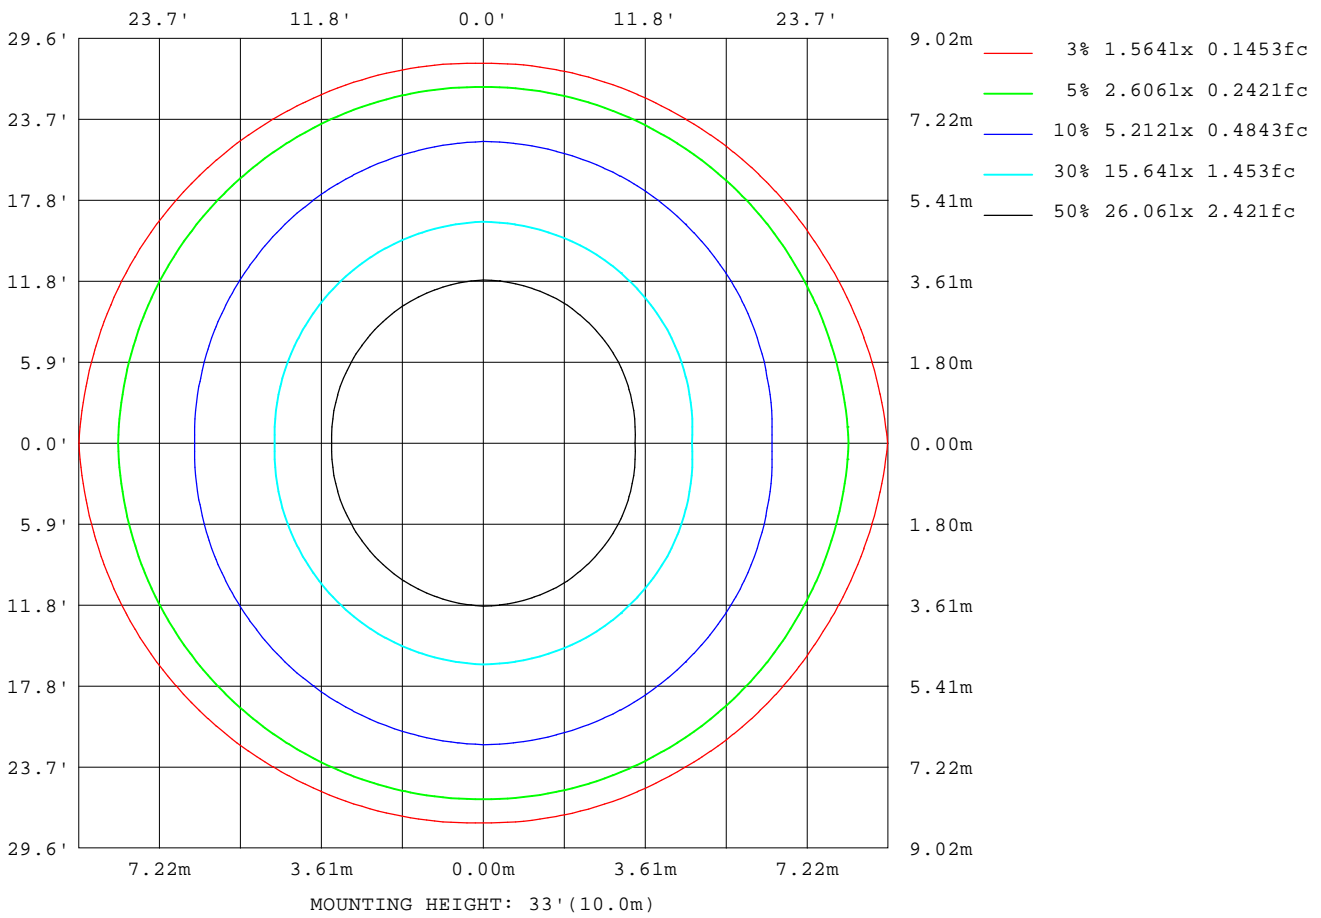

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

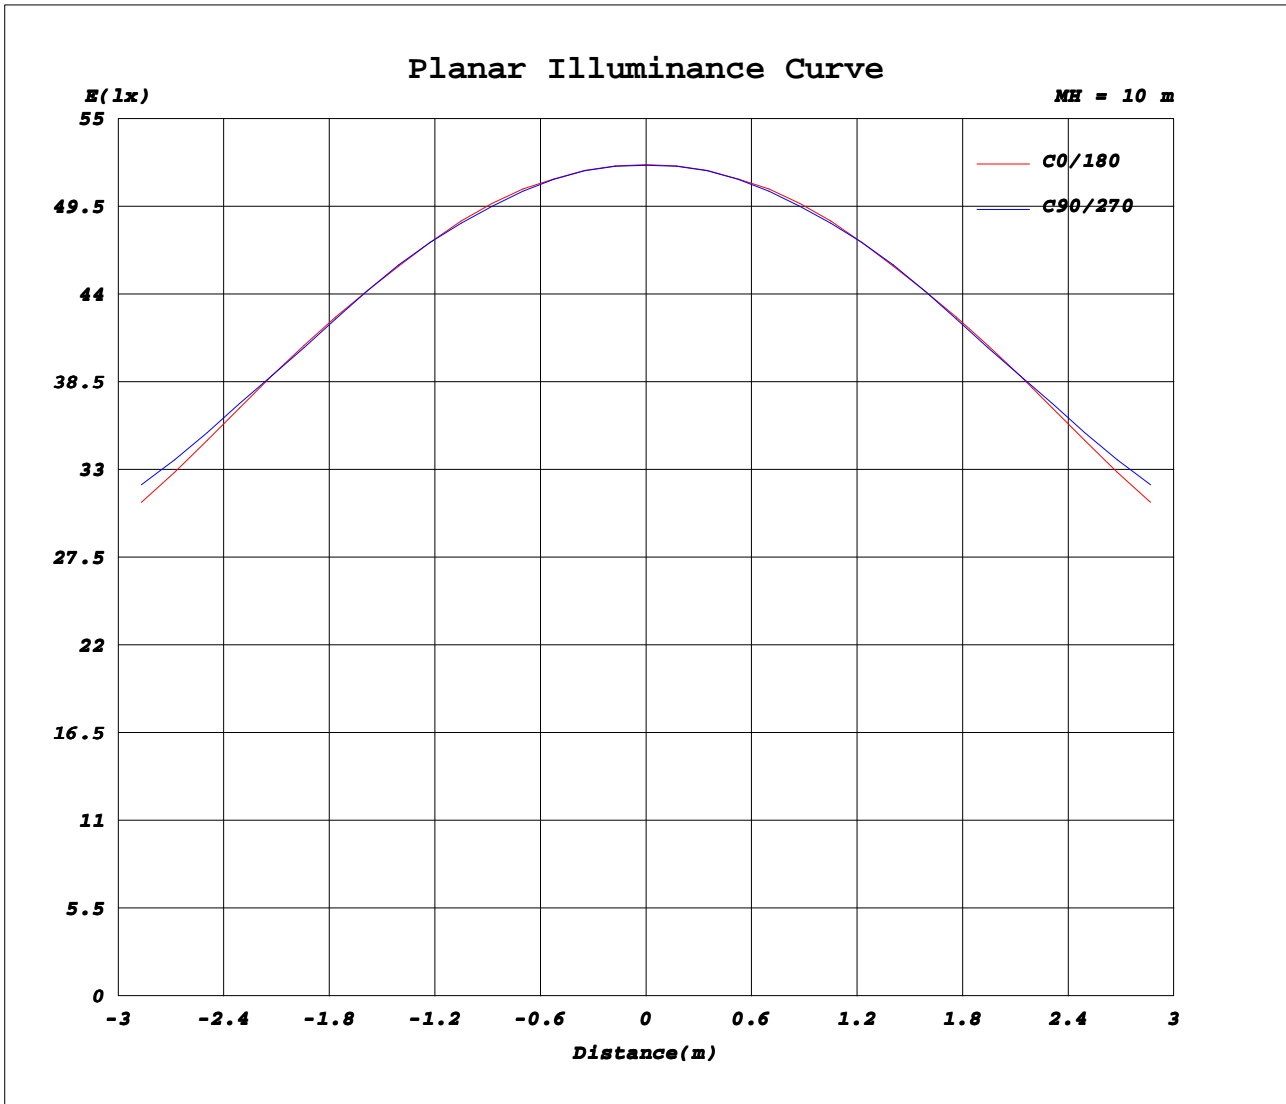

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1460A P:31.200W PF:0.9610 Freq:50.00Hz		
Lamp Flux:3261.31x1 lm		
Name: NS98-φ140mm-30W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H254mm	
	SUR.: D95mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	5212	5211	5209	5209	5210	5211	5212	5211	5210	5209	5209	5211							
5	5025	5016	5010	5009	5014	5020	5025	5020	5014	5009	5010	5016							
10	4456	4449	4445	4444	4448	4453	4456	4453	4448	4444	4445	4449							
15	3644	3692	3721	3731	3704	3671	3644	3671	3704	3731	3721	3692							
20	2866	3016	3105	3135	3052	2949	2866	2949	3052	3135	3105	3016							
25	2088	2265	2371	2406	2308	2186	2088	2186	2308	2406	2371	2265							
30	1228	1336	1401	1423	1363	1288	1228	1288	1363	1423	1401	1336							
35	726	783	817	829	797	757	726	757	797	829	817	783							
40	506	432	388	373	414	465	506	465	414	373	388	432							
45	202	128	83.0	68.2	109	161	202	161	109	68.2	83.0	128							
50	49.5	51.5	52.8	53.2	52.0	50.7	49.5	50.7	52.0	53.2	52.8	51.5							
55	22.8	22.7	22.6	22.6	22.7	22.7	22.8	22.7	22.7	22.6	22.6	22.7							
60	14.4	13.8	13.4	13.3	13.6	14.0	14.4	14.0	13.6	13.3	13.4	13.8							
65	9.47	8.71	8.25	8.10	8.52	9.04	9.47	9.04	8.52	8.10	8.25	8.71							
70	6.03	5.59	5.33	5.24	5.48	5.79	6.03	5.79	5.48	5.24	5.33	5.59							
75	4.18	3.96	3.83	3.79	3.91	4.06	4.18	4.06	3.91	3.79	3.83	3.96							
80	3.45	3.18	3.02	2.97	3.12	3.30	3.45	3.30	3.12	2.97	3.02	3.18							
85	3.17	3.23	3.26	3.27	3.24	3.20	3.17	3.20	3.24	3.27	3.26	3.23							
90	3.46	3.55	3.61	3.63	3.58	3.51	3.46	3.51	3.58	3.63	3.61	3.55							
95	3.93	4.05	4.12	4.15	4.08	4.00	3.93	4.00	4.08	4.15	4.12	4.05							
100	4.71	4.81	4.87	4.89	4.84	4.77	4.71	4.77	4.84	4.89	4.87	4.81							
105	5.75	5.78	5.80	5.80	5.79	5.77	5.75	5.77	5.79	5.80	5.80	5.78							
110	7.08	7.06	7.05	7.05	7.06	7.07	7.08	7.07	7.06	7.05	7.05	7.06							
115	8.82	8.76	8.72	8.71	8.74	8.79	8.82	8.79	8.74	8.71	8.72	8.76							
120	11.0	10.9	10.8	10.8	10.9	11.0	11.0	11.0	10.9	10.8	10.8	10.9							
125	13.8	13.5	13.4	13.3	13.5	13.7	13.8	13.7	13.5	13.3	13.4	13.5							
130	17.1	16.7	16.5	16.4	16.6	16.9	17.1	16.9	16.6	16.4	16.5	16.7							
135	20.7	20.3	20.1	20.0	20.2	20.5	20.7	20.5	20.2	20.0	20.1	20.3							
140	24.7	24.3	24.0	23.9	24.2	24.5	24.7	24.5	24.2	23.9	24.0	24.3							
145	28.6	28.1	27.8	27.7	28.0	28.3	28.6	28.3	28.0	27.7	27.8	28.1							
150	32.2	31.5	31.0	30.9	31.3	31.8	32.2	31.8	31.3	30.9	31.0	31.5							
155	34.6	33.7	33.2	33.1	33.5	34.1	34.6	34.1	33.5	33.1	33.2	33.7							
160	35.3	34.5	34.0	33.8	34.3	34.9	35.3	34.9	34.3	33.8	34.0	34.5							
165	34.9	33.7	32.9	32.7	33.4	34.2	34.9	34.2	33.4	32.7	32.9	33.7							
170	34.2	32.5	31.5	31.2	32.1	33.2	34.2	33.2	32.1	31.2	31.5	32.5							
175	34.0	32.0	30.8	30.4	31.5	32.9	34.0	32.9	31.5	30.4	30.8	32.0							
180	34.2	32.2	31.0	30.6	31.7	33.1	34.2	33.1	31.7	30.6	31.0	32.2							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: